

NORLYS HAMMERFEST 5130


IP 65 | IK 07 | AC 220-240V 50-60Hz | LED | No Dim

Hammerfest
5130XX0010
02.11.2026 v.10.27
www.norlys.no



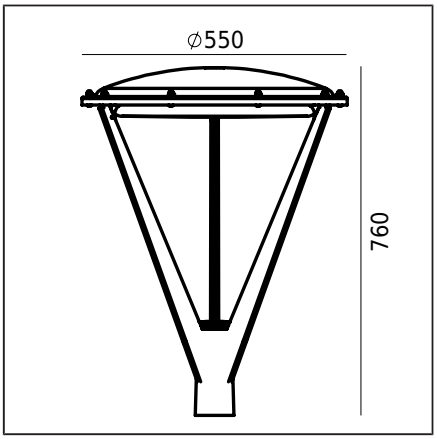

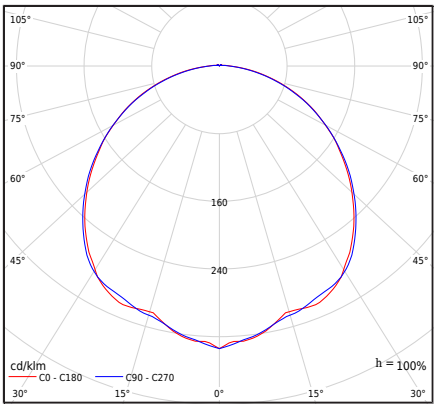

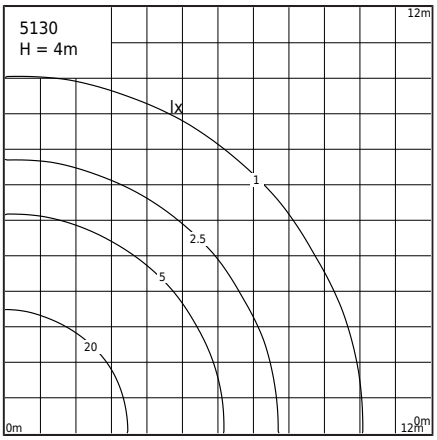

Type of luminaire

Type of luminaire	Pole luminaire.
Photometric body	Diffused light, covered from the top.
Characteristics of the luminaire	Pole-mounted luminaire intended for installation on a lighting pole with a mounting shaft of Ø60mm.

General information

Materials	Powder painted aluminum cast. Lens - satin PMMA plastic. Silicone gasket.
Mounting method	Fixture mounting: the fixture is suitable for a ø60mm pole, depth 95mm. Other accessories should be purchased separately.
Terminal	H05RN-F 3G1 cable with a length of 6m for connection in a properly selected electrical box.
Type of light source	LED module, electronic power supply Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.
Light control	Non-dimmable fixture
Luminaire weight net / gross	9,18kg / 11,75kg
Box dimensions [cm]	80cm x 62cm x 62cm
Luminaire dimensions [cm]	55cm x 76cm x 55cm
Side area of luminaire	0,1m^2

Technical data

LED module	Cree DK190707 V2 JK3030 4K (Datasheet)
Driver	Yes
Driver durability	100000h
Light source wattage	28,9W
Luminaire wattage	32W
Lamp luminous flux	4503lm
Luminaire luminous flux	3933lm
Efficiency of the luminaire	122,9lm/W
ULOR	2%
Color temperature	4000K
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	80
L80TM-21 [wg LM-80]	>102 000h
L90 TM-21 [wg LM-80]	>52 600h
LED photobiological threat	RG0 or RG1
Power Factor luminaire	PF>0,98
Ta Rated temperature	+25°C
Ambient operating temp. range	-30...+45°C
This product contains light source of energy efficiency class C / EPREL	
BUG rating	B2-U2-G1

Accessories sold separately

154XX0010	Mounting adapter

Spare parts

4699101101	LED module.
4699200102	Power supply.
ZS5130zx0010	Repair kit.

Files to download

Photometric LDT files	Photometric IES files
Manual	BIM Revit
BIM ArchiCAD	

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC Cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before starting the assembly, please familiarize yourself with the instructions attached to the fixture. Due to the dynamic development of lighting technology, additional information is provided upon customer request. Condensation that may occur in fixtures is a natural phenomenon and does not affect the quality of the fixture.

HAMMERFEST 5130

Indexes

Index	Color	RAL
5130AL	ALUMINUM	9006
5130GR	GRAPHITE	7016

Other colors according to the "Colors Template" / RAL pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873
CERTIFICATE ISO 14001
RoHS 2011/65/UE

Before starting the assembly, please familiarize yourself with the instructions attached to the fixture. Due to the dynamic development of lighting technology, additional information is provided upon customer request. Condensation that may occur in fixtures is a natural phenomenon and does not affect the quality of the fixture.