

NORLYS HAMMERFEST 5134

AC 220-240V 50-60Hz | IP 65 | LED | D4i

Hammerfest
5134XX0009
14.10.2026 v.09.16
www.norlys.no



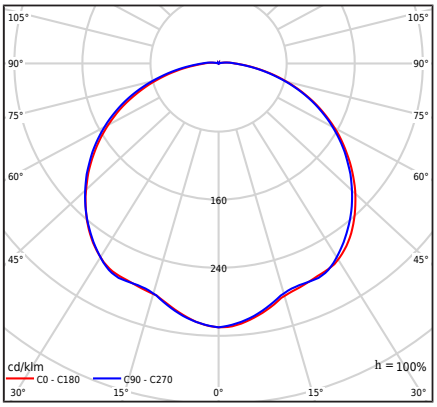

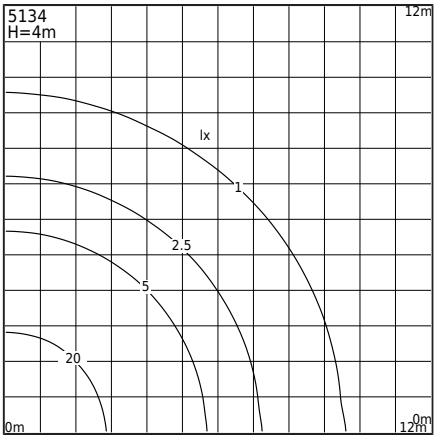

Type of luminaire

Type of luminaire	Pole luminaire.
Photometric body	Diffused light, covered from the top.
Characteristics of the luminaire	Surface-mounted luminaire designed to be installed on a lighting pole with a mounting post of Ø60mm.

General information

Materials	Powder painted aluminum cast. Lens - plastic PMMA in milky color. Silicone gasket.
Mounting method	Fixing of the luminaire: luminaire adjusted to ø60mm lighting pole, depth 95mm.
Terminal	H05RN-F 3G1 cable 6m long , for connection inside the lighting pole (in an appropriately selected electrical installation box).
Type of light source	LED module, electronic power supply, Zhaga book18 connector Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.
Light control	Light control in the D4i system. Power supply programmed for max permitted current. Programming of the remaining parameters after contact with the Norlys Sales Department.
Luminaire weight net / gross	9,18kg / 11,75kg
Box dimensions [cm]	80cm x 62cm x 62cm

Technical data

LED module	Cree DK190707 V2 JK3030 3K (Datasheet)
Driver	Yes
Driver durability	100000h
External control	D4i (User manual)
Light source wattage	27,5W
Luminaire wattage	32,7W
Lamp luminous flux	4602lm
Luminaire luminous flux	2983lm
Efficiency of the luminaire	91,2lm/W
Color temperature	4000K
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	80
L80TM-21 [wg LM-80]	102 000h
L90 TM-21 [wg LM-80]	52 600h
LED photobiological threat	RG0 or RG1
Power Factor luminaire	PF>0,98
THD factor	10%
Overvoltage	6 / 8kV
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C
This product contains light source of energy efficiency class C / EPREL	
Inrush current	21A/300µs

Spare parts

4699101101	LED module.
4699200100	Power supply.
xxxxxxx	Repair kit.

Files to download

Photometric LDT files	Photometric IES files
Manual	

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC Cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Please read the manual before installing. Due to the dynamic development of lighting technology, additional information is available upon request. LED module must be replaced by a qualified person in accordance with applicable regulations. Condensation, which can occur in luminaires, is a natural phenomenon and does not impair the quality of the luminaire.

HAMMERFEST 5134

Indexes

Index	Color	RAL
5134AL	ALUMINUM	9006
5134GR	GRAPHITE	7016

Other colors according to the "Colors Template" / RAL pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873
CERTIFICATE ISO 14001
RoHS 2011/65/UE

Please read the manual before installing. Due to the dynamic development of lighting technology, additional information is available upon request. LED module must be replaced by a qualified person in accordance with
applicable regulations. Condensation, which can occur in luminaires, is a natural phenomenon and does not
impair the quality of the luminaire.