

NORLYS HAMMERFEST 5135


IP 65 | IK 07 | AC 220-240V 50-60Hz | LED | No Dim

Hammerfest
5135XX0010
02.11.2026 v.10.21
www.norlys.no



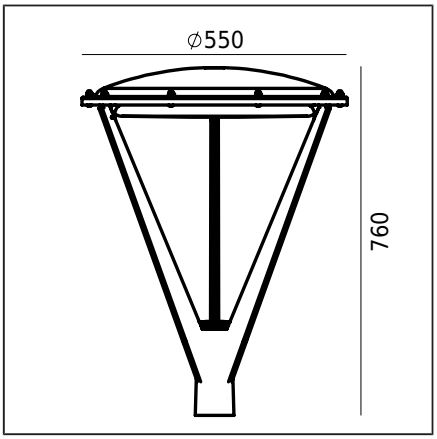

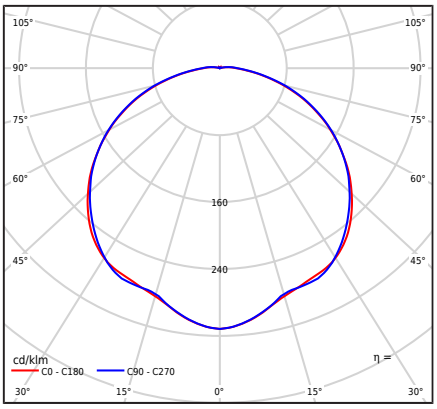

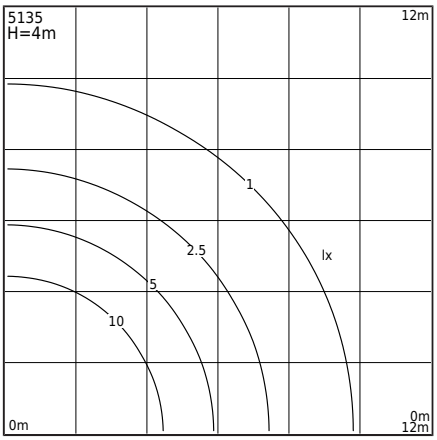

Type of luminaire

Type of luminaire	Pole luminaire.
Photometric body	Diffused light, covered from the top.
Characteristics of the luminaire	Surface-mounted luminaire designed to be installed on a lighting pole with a mounting post of Ø60mm.

General information

Materials	Powder painted aluminum cast. Lens - plastic PMMA in milky color. Silicone gasket.
Mounting method	Fixing of the luminaire: luminaire adjusted to ø60mm lighting pole, depth 95mm
Terminal	H05RN-F 3G1 cable 6m long, for connection in an appropriately selected electrical installation box
Type of light source	LED module, electronic power supply Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.
Light control	Non-dimmable fixture
Luminaire weight net / gross	9,18kg / 11,75kg
Box dimensions [cm]	80cm x 62cm x 62cm
Luminaire dimensions [cm]	55cm x 55cm x 76cm
Side area of luminaire	0,102m^2

Technical data

LED module	Cree DK190707 V2 JK3030 4K (Datasheet)
Driver	Yes
Driver durability	100000h
Light source wattage	28,9W
Luminaire wattage	32,3W
Lamp luminous flux	4503lm
Luminaire luminous flux	3320lm
Efficiency of the luminaire	102,8lm/W
ULOR	2%
Color temperature	4000K
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	80
L80TM-21 [wg LM-80]	>102 000h
L90 TM-21 [wg LM-80]	>52 600h
LED photobiological threat	RG0 or RG1
Power Factor luminaire	PF>0,98
THD factor	9%
Overvoltage	6 / 10kV
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C
This product contains light source of energy efficiency class C / EPREL	
Inrush current	19A / 210µs
BUG rating	"B1-U2-G1"

Accessories sold separately

154XX0010	Mounting adapter

Spare parts

4699101101	LED module.
4699200102	Power supply.
ZS5135zx0010	Repair kit.

Files to download

Photometric LDT files	Photometric IES files
Manual	BIM Revit
BIM ArchiCAD	

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Please read the manual before installing it. Due to the dynamic development of lighting technology, additional information is available upon request. LED modules must be replaced by a qualified person in accordance with applicable regulations. Condensation, which can occur in luminaires, is a natural phenomenon and does not impair the quality of the luminaire.

HAMMERFEST 5135

Indexes

Index	Color	RAL
5135AL	ALUMINUM	9006
5135GR	GRAPHITE	7016

Other colors according to the "Colors Template" / RAL pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873
CERTIFICATE ISO 14001
RoHS 2011/65/UE

Please read the manual before installing it. Due to the dynamic development of lighting technology, additional information is available upon request. LED modules must be replaced by a qualified person in accordance with
applicable regulations. Condensation, which can occur in luminaires, is a natural phenomenon and does not
impair the quality of the luminaire.