


NORLYS HAMMERFEST 5136

Hammerfest
5136XX0010
14.10.2026 v.10.7
www.norlys.no



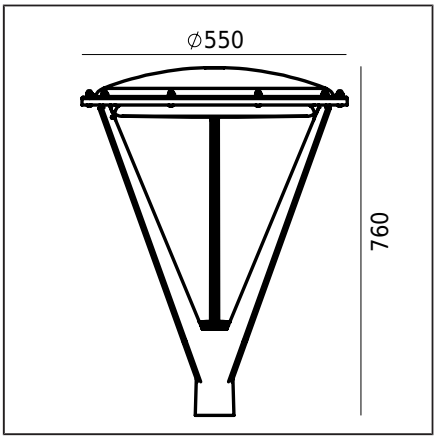

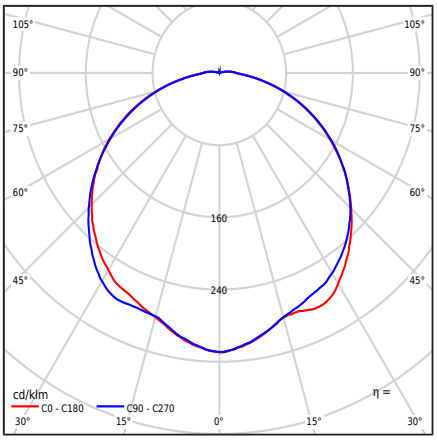

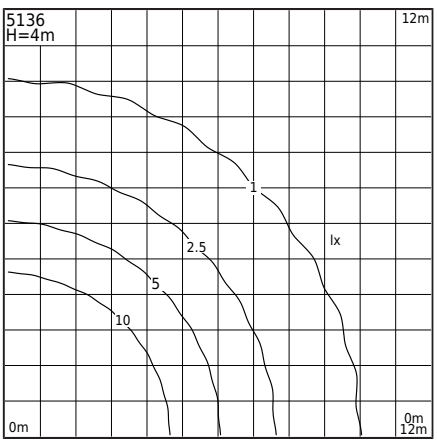

Type of luminaire

Type of luminaire	Pole luminaire.
Photometric body	Downward-directed light.
Characteristics of the luminaire	Surface mounted luminaire designed to be installed onto a lighting pole with a mounting stem of Ø60mm.

General information

Materials	Powder painted aluminum cast. Lens - plastic PMMA in milky color. Silicone gasket.
Mounting method	Fixture mounting: the fixture is designed for a ø60mm pole, depth 95mm. Additional accessories must be purchased separately.
Terminal	H05RN-F 6G1 cable, 6m long, for pole connection, in an appropriately selected electrical junction box.
Type of light source	LED module, DALI outdoor electronic power supply Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.
Light control	System light control: DALI outdoor full programm. The power supply is programmed for the maximum permitted current. Programming of other parameters after contact with the Norlys Sales Department.
Luminaire weight net / gross	9,18kg / 11,75kg
Box dimensions [cm]	80cm x 62cm x 62cm
Luminaire dimensions [cm]	76cm x 55cm x 55cm
Side area of luminaire	0,1m^2

Technical data

LED module	Cree DK190707 V3 JB2835 3K (Datasheet)
Driver	Yes
Driver durability	100000h
External control	DALI2 / NightDim (4DIM) (User manual)
Light source wattage	26,9W
Luminaire wattage	32W
Lamp luminous flux	5200lm
Luminaire luminous flux	3670lm
Efficiency of the luminaire	114,7lm/W
ULOR	2%
Color temperature	3000K
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	80
L80TM-21 [wg LM-80]	102 000h
L90 TM-21 [wg LM-80]	52 600h
Power Factor luminaire	PF 0,98
THD factor	< 10 %
Overvoltage	6 / 10kV
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C
This product contains light source of energy efficiency class C / EPREL	
Inrush current	26A / 180 µs
BUG rating	"B1-U2-G1"

Maximum number of luminaires of this type per MCB:

B 10A: 18, B 16A: 28

Accessories sold separately

154XX0010	Mounting adapter

Spare parts

4699101202	LED module.
46999768	Power supply.
ZS5136zx0010	Repair kit.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

Management System ISO 9001:2015 IATF 16949:2016
TÜVRheinland CERTIFIED
www.tuv.com ID 9108651873

PCC cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before starting installation, it is necessary to read the instructions included with the fixture. Due to the dynamic development of lighting technology, we provide additional information at the customer's request. Condensation that may occur in the fixtures is a natural phenomenon and does not affect the quality of the fixture.

HAMMERFEST 5136

Files to download

Photometric LDT files	Photometric IES files
Manual	BIM Revit
BIM ArchiCAD	

Indexes

Index	Color	RAL
5136AL	ALUMINUM	9006
5136GR	GRAPHITE	7016

Other colors according to the "Colors Template" / RAL pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873
CERTIFICATE ISO 14001
RoHS 2011/65/UE

Before starting installation, it is necessary to read the instructions included with the fixture. Due to the dynamic development of lighting technology, we provide additional information at the customer's request. Condensation that may occur in the fixtures is a natural phenomenon and does not affect the quality of the fixture.