

NORLYS HAMMERFEST 5137


IP 65 | IK 07 | AC 220-240V 50-60Hz | LED | DALI2

Hammerfest
5137XX0009
14.10.2026 v.09.13
www.norlys.no



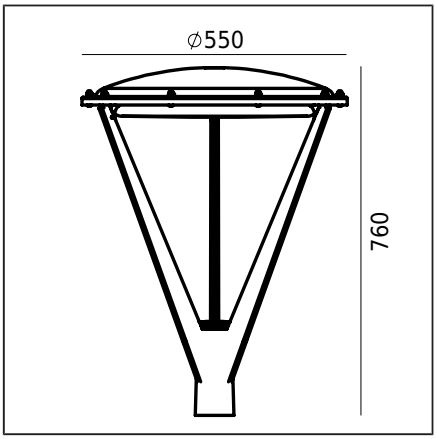

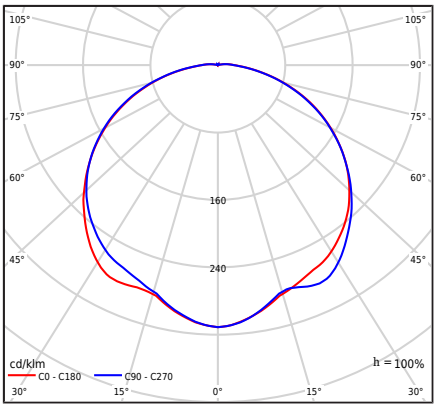

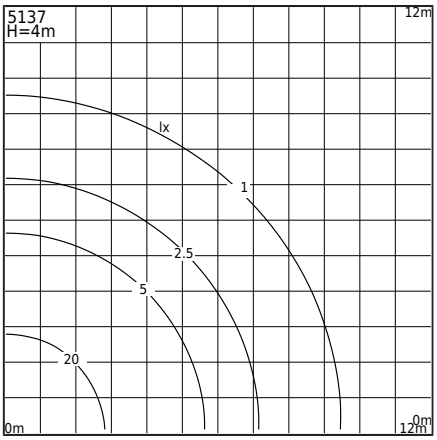

Type of luminaire

Type of luminaire	Pole luminaire.
Photometric body	Downward-directed light.
Characteristics of the luminaire	Luminaire mounted on a telescopic lighting pole with a diameter Ø60mm. Other components need to be ordered separately

General information

Materials	Powder painted aluminum cast. Lens - plastic PMMA in milky color. Silicone gasket.
Mounting method	Fixing of the luminaire: luminaire adjusted to ø60mm lighting pole, depth 95mm
Terminal	H05RN-F 6G1 cable 6m long, for connection inside the lighting pole in an appropriately selected electrical installation box
Type of light source	LED module, DALI outdoor electronic power supply Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.
Light control	System light control: DALI outdoor full programm. The power supply is programmed for the maximum permitted current. Programming of other parameters after contact with the Norlys Sales Department.
Luminaire weight net / gross	9,18kg / 11,75kg
Box dimensions [cm]	80cm x 62cm x 62cm
Luminaire dimensions [cm]	76cm x 55cm x 55cm
Side area of luminaire	0,1m^2

Technical data

LED module	Cree DK190707 V2 JK3030 3K (Datasheet)
Driver	Yes
Driver durability	100000h
External control	DALI2 / NightDim (4DIM) (User manual)
Light source wattage	28,8W
Luminaire wattage	32,5W
Lamp luminous flux	4503lm
Luminaire luminous flux	3310lm
Efficiency of the luminaire	101,8lm/W
ULOR	2%
Color temperature	4000K
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	80
L80TM-21 [wg LM-80]	>102 000h
L90 TM-21 [wg LM-80]	>52 600h
LED photobiological threat	RG0 or RG1
Power Factor luminaire	PF>0,98
THD factor	<10 %
Overvoltage	6 / 10kV
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C
This product contains light source of energy efficiency class C / EPREL	
Inrush current	26A / 180 µs
BUG rating	"B1-U2-G1"

Maximum number of luminaires of this type per MCB:

B 10A: 18, B 16A: 28

Accessories sold separately

154XX0010	Mounting adapter

Spare parts

4699101101	LED module.
46999768	Power supply.
ZS5137zx0009	Repair kit.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC Cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Please read the manual before installing it. Due to the dynamic development of lighting technology, additional information is available upon request. LED modules must be replaced by a qualified person in accordance with applicable regulations. Condensation, which can occur in luminaires, is a natural phenomenon and does not impair the quality of the luminaire.

HAMMERFEST 5137

Files to download

Photometric LDT files	Photometric IES files
Manual	BIM Revit
BIM ArchiCAD	

Indexes

Index	Color	RAL
5137AL	ALUMINUM	9006
5137GR	GRAPHITE	7016

Other colors according to the "Colors Template" / RAL pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

Please read the manual before installing it. Due to the dynamic development of lighting technology, additional information is available upon request. LED modules must be replaced by a qualified person in accordance with applicable regulations. Condensation, which can occur in luminaires, is a natural phenomenon and does not impair the quality of the luminaire.