


HAMMERFEST 5139

Hammerfest
5139XX0009
14.10.2026 v.09.4
www.norlys.no



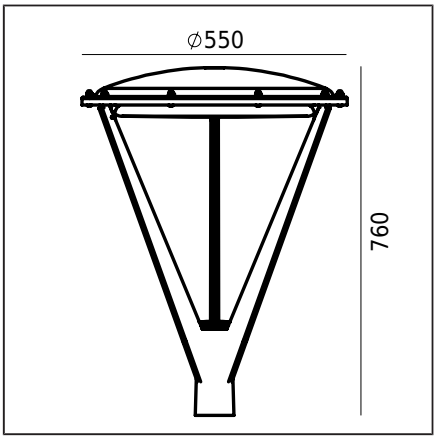

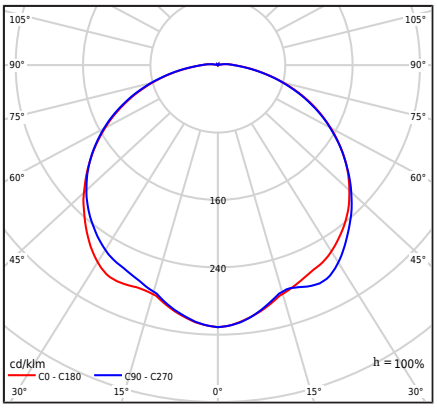

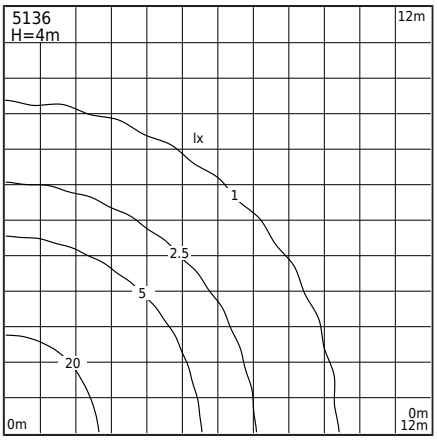

Type of luminaire

Type of luminaire	Pole luminaire.
Photometric body	Downward-directed light.
Characteristics of the luminaire	Surface mounted luminaire designed to be installed onto a lighting pole with a mounting stem of Ø60mm.

General information

Materials	Powder painted aluminum cast. Lens - plastic PMMA in milky color. Silicone gasket.
Mounting method	Fixture mounting: the fixture is designed for a ø60mm pole, depth 95mm. Additional accessories must be purchased separately.
Terminal	H05RN-F 3G1 cable with a length of 6m for connection in the pole, in a suitably selected electrical installation box.
Type of light source	LED module, electronic power supply Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.
Light control	Light control in the D4i system. Power supply programmed for max permitted current. Programming of the remaining parameters after contact with the Norlys Sales Department.
Luminaire weight net / gross	9,18kg / 11,75kg
Box dimensions [cm]	80cm x 62cm x 62cm
Luminaire dimensions [cm]	55cm x 55cm x 76cm
Side area of luminaire	0,1m^2

Technical data

LED module	Cree DK190707 V2 JK3030 4K (Datasheet)
Driver	Yes
Driver durability	100000h
External control	D4i (User manual)
Light source wattage	28,8W
Luminaire wattage	32W
Lamp luminous flux	4311lm
Luminaire luminous flux	3812lm
Efficiency of the luminaire	119,1lm/W
ULOR	2%
Color temperature	4000K
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	80
L80TM-21 [wg LM-80]	>102 000h
L90 TM-21 [wg LM-80]	>52 600h
LED photobiological threat	RG0 or RG1
Power Factor luminaire	PF>0,98
THD factor	<10%
Overvoltage	6 / 10kV
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C
This product contains light source of energy efficiency class C / EPREL	
Inrush current	26A / 180µs

Spare parts

4699101101	LED module.
4699200100	Power supply.
ZS5139zx0009	Repair kit.

Files to download

Photometric LDT files	Photometric IES files
Manual	BIM Revit
BIM ArchiCAD	

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873

CERTIFICATE ISO 14001

2011/65/UE

Before starting installation, it is necessary to read the instructions included with the fixture. Due to the dynamic development of lighting technology, we provide additional information at the customer's request. Condensation that may occur in the fixtures is a natural phenomenon and does not affect the quality of the fixture.

HAMMERFEST 5139



Indexes

Index	Color	RAL
5139AL	ALUMINUM	9006
5139GR	GRAPHITE	7016

Other colors according to the "Colors Template" / RAL pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED
Management System
ISO 9001:2015
IATF 16949:2016
www.tuv.com
ID 9108651873

PCC Cert
CERTIFICATE
ISO 14001

RoHS 2011/65/UE

Before starting installation, it is necessary to read the instructions included with the fixture. Due to the dynamic development of lighting technology, we provide additional information at the customer's request. Condensation that may occur in the fixtures is a natural phenomenon and does not affect the quality of the fixture.