

NORLYS HALDEN 515


IP 65 | IK 10 | AC 220-240V 50-60Hz | E27 LED | DIM

Halden 515XX0009
16.09.2026 v.09.11
www.norlys.no



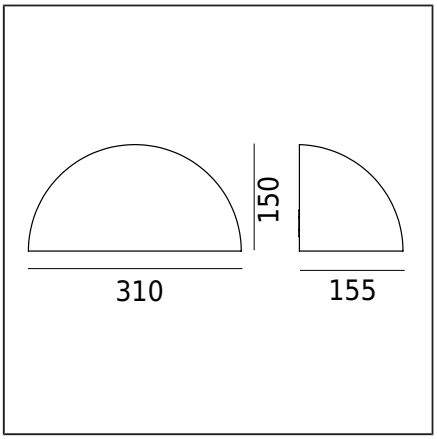

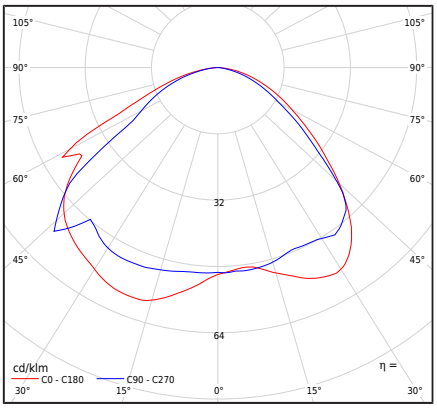

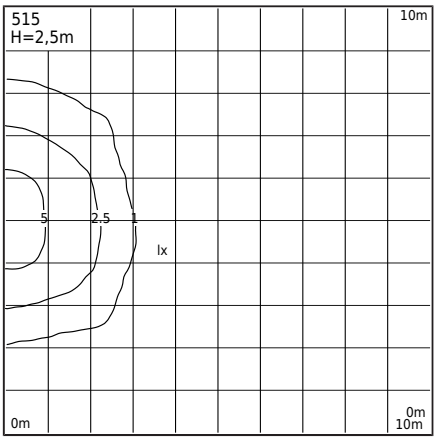

Type of luminaire

Type of luminaire	Wall light,
Photometric body	Diffuse downward-directed hemispherical light
Characteristics of the luminaire	Luminaire with a wide range of applications for example for illumination of walls and facade surfaces or any other architectural concepts.

General information

Materials	Powder painted aluminum cast. Lens - transparent polycarbonate with structure, UV stabilized. Silicone gasket. EPDM cable gland.
Mounting method	Fixing of the luminaire: mounting plate with 2 adjust holes 7x10mm, spacing 100mm.
Terminal	Connection terminals: max 3x2,5mm², possibility to connect luminaire in max 3x1,5mm². A round wire in the isolation with a diameter of ø7...10,5mm.
Type of light source	LED Lamp E27 A55...A60 Replaceable (LED only) light source by an end-user.
Light control	Phase-dimming (TRIAC) TRAILING EDGE (TE) - LEADING EDGE (LE)
Luminaire weight net / gross	1,8kg / 2kg
Box dimensions [cm]	34cm x 17cm x 16,5cm

Technical data

LED Lamp E27	Philips MAS LEDBulb DT5.9-60W E27 927 A60 FR G (Datasheet)
External control	Phase dimming LED GU10 E27 (User manual)
Light source wattage	5,9W
Luminaire wattage	5,9W
Lamp luminous flux	806lm
Luminaire luminous flux	175lm
Efficiency of the luminaire	29,7lm/W
ULOR	0%
Color temperature	2700K
Colour consistency (McAdam ellipse)	SDCM6
Colour rendering index CRI	80
L70TM-21 [wg LM-80]	>25 000h
Power Factor luminaire	PF 0,7
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C
This product contains light source of energy efficiency class D / EPREL	
BUG rating	B0-U1-G0

Spare parts

09012000001	Lampshade - service kit
46999021	LED E27 lamp
63120003/ 63120004	Left/right gasket.

Files to download

Photometric LDT files	Photometric IES files
Manual	

Indexes

Index	Color	RAL
515AL	ALUMINUM	9006
515GR	GRAPHITE	7016
515WH	WHITE	9003

Other colors according to the "Colors Template" pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Please read the manual before installing. Due to the dynamic development of lighting technology, additional information is available upon request. LED module must be replaced by a qualified person in accordance with applicable regulations. Condensation, which can occur in luminaires, is a natural phenomenon and does not impair the quality of the luminaire.