


NORLYS ASKER SMALL PRO 5151


AC 220-240V 50-60Hz | IP 65 | IK 08 | LED | DIM

Asker small pro
5151XX0017
13.10.2026 v.17.2
www.norlys.no

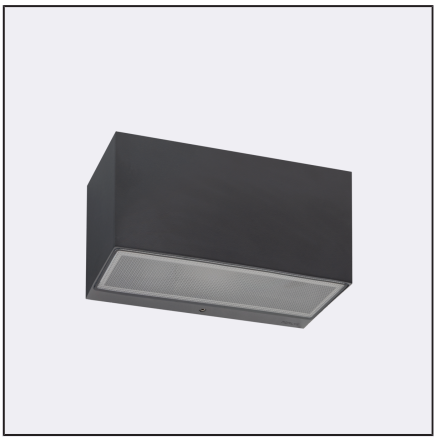

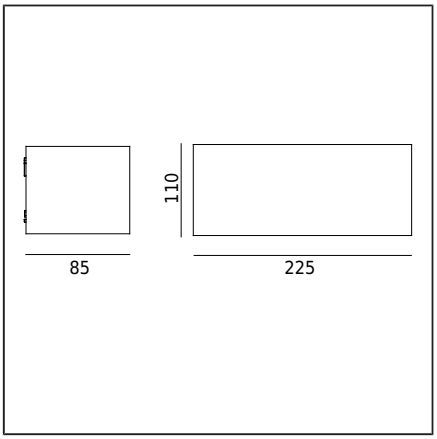

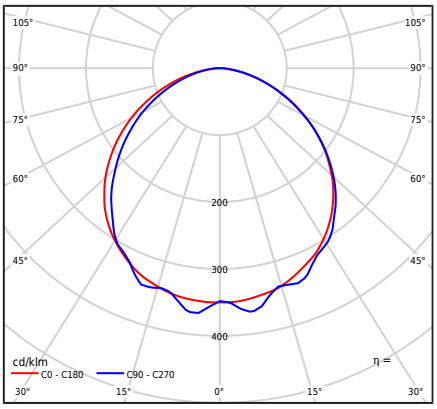

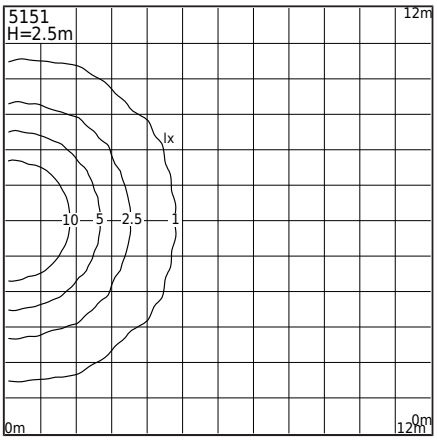

Type of luminaire

Type of luminaire	Wall light,
Photometric body	Diffuse downward-directed hemispherical light
Characteristics of the luminaire	Fixture with a wide range of applications, including lighting wall surfaces, facades, and other architectural concepts.

General information

Materials	Powder painted aluminum cast. Lens - transparent polycarbonate with structure, UV stabilized. Silicone gasket. EPDM cable gland.
Mounting method	Luminaire mounting: 2 holes ø4.5mm spacing 180x60mm. According to the included installation instructions.
Terminal	Connection terminals: max 3x2.5mm², possibility of looping the fixture max 3x1.5mm². Cable in round sheath with a diameter of ø7...10.5mm.
Type of light source	LED module, electronic power supply Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.
Light control	Trailing edge (TE) dimming
Luminaire weight net / gross	1,34kg / 1,47kg
Box dimensions [cm]	24,5cm x 12,5cm x 10,5cm
Luminaire dimensions [cm]	22,5cm x 11cm x 8,5cm

Technical data

LED module	Philips Strip OC 0.5ft 550lm 8xx FC HV5 4K (Datasheet)
Driver	Yes
Driver durability	50000h
External control	Philips Xitanium TE (User manual)
Light source wattage	4W
Luminaire wattage	5,4W
Lamp luminous flux	681lm
Luminaire luminous flux	444lm
Efficiency of the luminaire	82,2lm/W
ULOR	0%
Color temperature	4000K
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	80
L80B20 [wg LM-80]	>72 000h
L90B10 [wg LM-80]	>64 000h
Power Factor luminaire	PF 0,9
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C

This product contains light source of energy efficiency class C / EPREL

BUG rating	B0-U0-G0

Spare parts

ZS5151zx0009	Service set.

Files to download

Photometric LDT files	Photometric IES files
Manual	BIM Revit
BIM ArchiCAD	

Indexes

Index	Color	RAL
5151AL	ALUMINUM	9006
5151BL	BLACK	9005
5151GR	GRAPHITE	7016
5151WH	WHITE	9003

Other colors according to the "Colors Template" / RAL pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC Cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before commencing installation, please refer to the manual attached to the lighting fixture. Installation and service work should be carried out by a person with the appropriate authorization and qualifications, in accordance with current regulations. Due to the dynamic development of lighting technology, additional information is provided upon customer's request.