
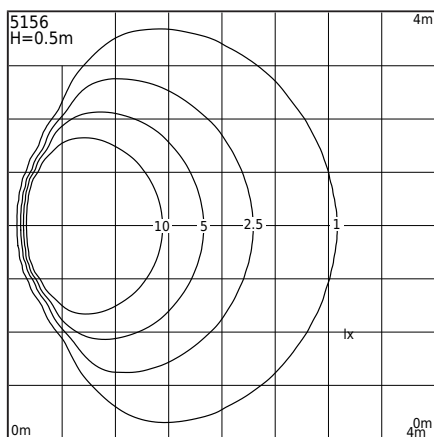
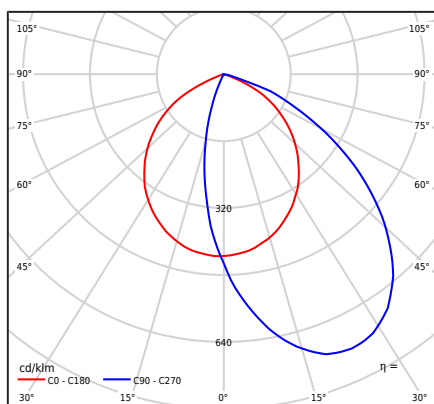
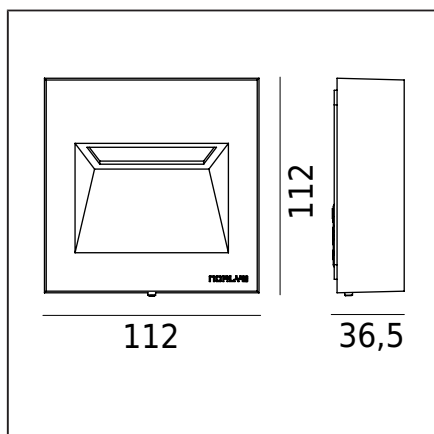


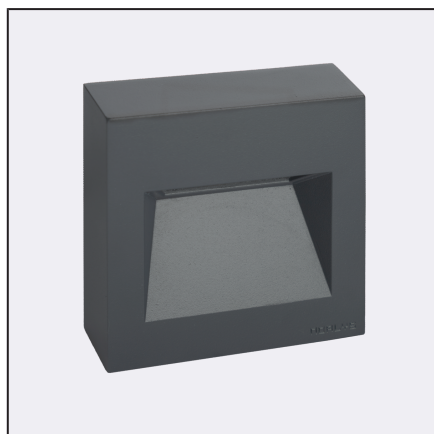

Type of luminaire

Type of luminaire	Wall light,
Photometric body	Diffuse downward-directed hemispherical light
Characteristics of the luminaire	Fixture designed for illuminating stairs, steps, staircases, corridors, lighting ceilings, and implementing other architectural concepts.

General information

Materials	Powder painted aluminum cast. Body - powder painted aluminum cast Lens - safety glass, satin. Silicone gasket.
Mounting method	Luminaire mounting: 2 holes $\varnothing$ 4.2mm, spacing 97mm.
Terminal	Terminal blocks: max 3x2.5mm ² , possibility of connecting the fixture in a loop max 3x1.5mm ² . Round cable with a diameter of $\varnothing$ 7...10.5mm.
Type of light source	LED module AC integrated Replaceable (LED only) light source by a professional.
Light control	Phase-dimming (TRIAC) TRAILING EDGE (TE) - LEADING EDGE (LE)

Technical data

LED module	Lumens EDC 38C 4W xxx 230V A101 4K (Ⓞ Datasheet)
External control	Phase dimmer Lumens LED AC (User manual)
Light source wattage	4W
Luminaire wattage	4,2W
Lamp luminous flux	466lm
Luminaire luminous flux	162lm
Efficiency of the luminaire	38,6lm/W
ULOR	0%
Color temperature	4000K
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	80
L70TM-21 [wg LM-80]	>59 000h
LED photobiological threat	RG0 or RG1
Power Factor luminaire	PF>0,98
THD factor	<20%
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C

This product contains light source of energy efficiency class **A** / Ⓞ EPREL

Inrush current	17mA / 60ms
BUG rating	B0-U1-G0

Accessories sold separately

157XX0009 Ⓞ	Distance
-------------	----------

Spare parts

ZS5156xx0010	Repair kit.
--------------	-------------

Files to download

Photometric LDT files	Photometric IES files
Manual	BIM Revit
BIM ArchiCAD	

Indexes

Index	Color	RAL
5156AL	ALUMINUM	9006
5156GR	GRAPHITE	7016

Other colors according to the "Colors Template" / RAL pattern book - available on request, subject to agreement with Norlys' Sales Department.