

NORLYS ASKER 5158


IP 65 | IK 10 | LED | DALI2

Asker 5158XX0009
16.09.2026 v.09.10
www.norlys.no



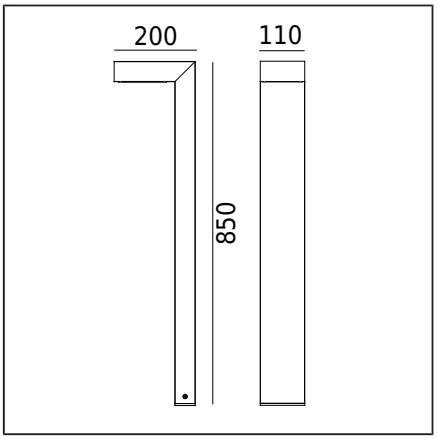

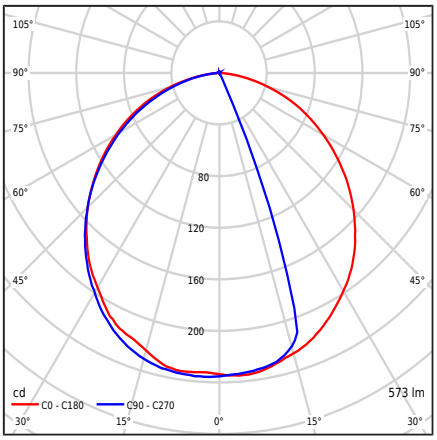

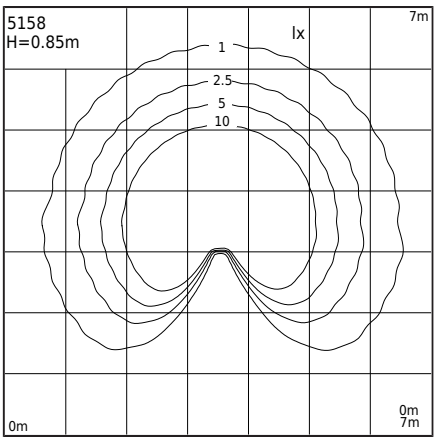

Type of luminaire

Type of luminaire	Post light fixture.
Photometric body	Downward-directed light.
Characteristics of the luminaire	A fixture with contemporary design. For illuminating gardens, private areas, and other architectural applications. Suitable for emergency installations on direct current voltage: DC 180 ÷ 280 V.

General information

Materials	Powder painted aluminum cast. Lens - transparent polycarbonate with structure, UV stabilized. Silicone gasket. EPDM cable gland.
Mounting method	Mounting of the luminaire: 4 holes ø8mm, spacing 18x50mm According to the attached assembly instructions Other accessories must be purchased separately
Terminal	Connection terminals: max 5x2.5mm² Possibility of connecting the luminaire in loops of max. 5x2.5mm². Round insulated cable with a diameter: ø4...8mm; ø8...12mm or ø10...13.6mm
Type of light source	LED module, DALI electronic power supply Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.
Light control	Light control - DALI system
Luminaire weight net / gross	4,01kg / 4,36kg
Box dimensions [cm]	88cm x 23cm x 13cm
Luminaire dimensions [cm]	85cm x 20cm x 11cm

Technical data

2 LED modules	Cree DK180501 V8 JB2835 3V 2,7K (Datasheet)
Driver	Yes
Driver durability	100000h
Light source wattage	6,5W
Luminaire wattage	7,2W
Lamp luminous flux	992lm
Luminaire luminous flux	543lm
Efficiency of the luminaire	75,4lm/W
ULOR	0%
Color temperature	2700K
Colour consistency (McAdam ellipse)	SDCM3
Flicker of light (Pst LM)	≤1
Strobe effect (SVM)	≤0.4
Colour rendering index CRI	80
L90 TM-21 [wg LM-80]	>h
Power Factor luminaire	PF 0,88
THD factor	13%
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C

This product contains light sources of energy efficiency class D / EPREL

Optional luminaire also available:
- For a different color of the luminaire (according to the RAL color palette)
- For a different frame height (not less than 55cm)

Terms of sale and other information, after contact with the Norlys Sales Department.

Inrush current	6,7A / 2,4µs

Maximum number of luminaires of this type per MCB:

B 10A: 46, B 16A: 74, C 10A: 74, C 16A: 119

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before the installation, please read the instructions included with the luminaire. Installation and service work are carried out by a person with appropriate authorizations and qualifications, in accordance with applicable regulations. Due to the dynamic development of lighting technology, we provide additional information upon customer request. Condensation that may occur in luminaires is a natural phenomenon and does not affect the quality of the luminaire.

Accessories sold separately

1907ZX0009	Concreting anchor
3090GA0009	Mounting adapter
1909GA0010	Adapter for concrete foundation
3081XX0009	Mounting adapter
1908GA0009	Ground anchor

Spare parts

ZS5158zx0009	Service set.

Files to download

Photometric LDT files	Photometric IES files
Manual	BIM Revit
BIM ArchiCAD	

Indexes

Index	Color	RAL
5158GR	GRAPHITE	7016

Other colors according to the "Colors Template" pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873

CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before the installation, please read the instructions included with the luminaire. Installation and service work are carried out by a person with appropriate authorizations and qualifications, in accordance with applicable regulations. Due to the dynamic development of lighting technology, we provide additional information upon customer request. Condensation that may occur in luminaires is a natural phenomenon and does not affect the quality of the luminaire.