



NORLYS ASKER SMALL PRO 5160

Asker small pro
5160XX0017
13.10.2026 v.17.2
www.norlys.no

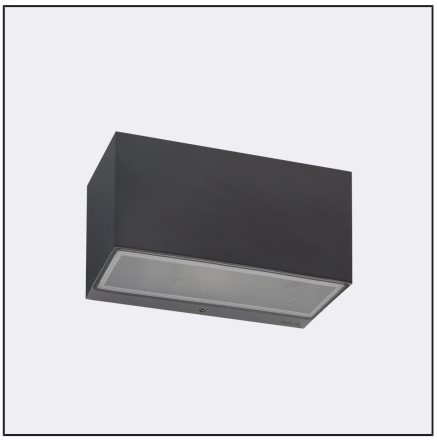

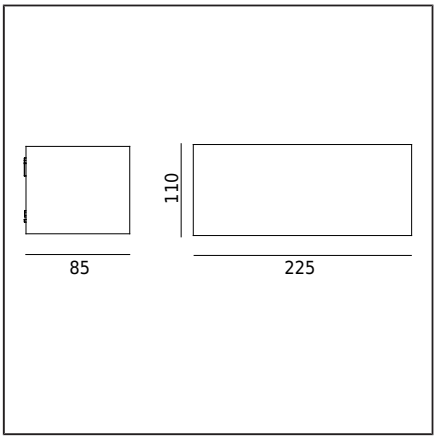

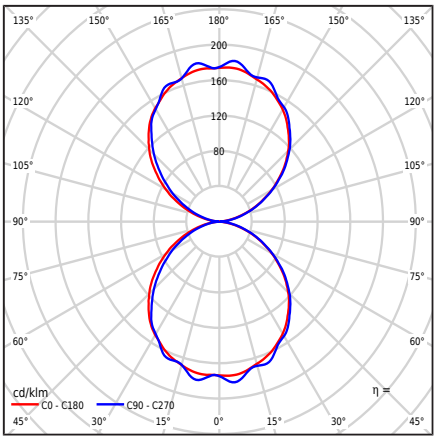

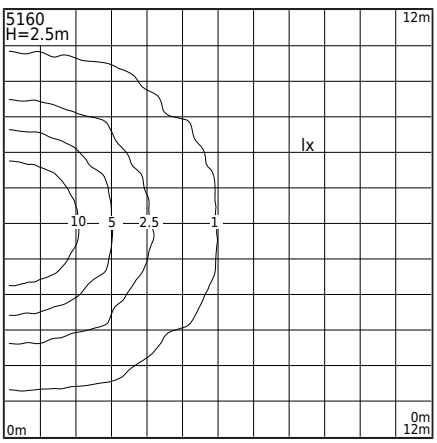

Type of luminaire

Type of luminaire	Wall light,
Photometric body	Double-sided light: directed up and down.
Characteristics of the luminaire	A fixture with a wide range of applications, including lighting walls, facades, and other architectural concepts.

General information

Materials	Powder painted aluminum cast. Lens - transparent polycarbonate with structure, UV stabilized. Silicone gasket. EPDM cable gland.
Mounting method	Fixture mounting: 2 holes ø4.5mm spacing 180x60mm.
Terminal	Connection terminals: max 5x2.5mm², possibility of looping the fixture max 5x1.5mm². Round cable with a diameter of ø7...10.5mm.
Type of light source	LED module, DALI / TD electronic power supply Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.
Luminaire weight net / gross	1,66kg / 1,84kg
Box dimensions [cm]	24,5cm x 12,5cm x 10,5cm

Technical data

LED module	Philips Strip OC 0.5ft 550lm 8xx FC HV5 3K (Datasheet)
Driver	Yes
Driver durability	100000h
Light source wattage	7,8W
Luminaire wattage	9,9W
Lamp luminous flux	1376lm
Luminaire luminous flux	901lm
Efficiency of the luminaire	91lm/W
Color temperature	4000K
Colour consistency (McAdam ellipse)	SDCM3
Flicker of light (Pst LM)	≤1
Strobe effect (SVM)	≤0.4
Colour rendering index CRI	80
L80B20 [wg LM-80]	>72 000h
L90B10 [wg LM-80]	>64 000h
Power Factor luminaire	PF 0,98
THD factor	15%
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C
This product contains light source of energy efficiency class C / EPREL	
Inrush current	5A / 100µs

Maximum number of luminaires of this type per MCB:

B 10A: 80, B 16A: 130, C 10A: 135, C 16A: 221

Spare parts

ZS5160zx0009	Service set.

Files to download

Photometric LDT files	Photometric IES files
Manual	BIM Revit
BIM ArchiCAD	

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

Management System ISO 9001:2015 IATF 16949:2016
TÜVRheinland CERTIFIED
www.tuv.com ID 9108651873

PCC Cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before starting the assembly, please refer to the instructions provided with the fixture. Due to the dynamic development of lighting technology, additional information is available at the customer's request. Condensation that may occur in fixtures is a natural phenomenon and does not affect the quality of the fixture.

ASKER SMALL PRO 5160

Indexes

Index	Color	RAL
5160AL	ALUMINUM	9006
5160BL	BLACK	9005
5160GR	GRAPHITE	7016
5160WH	WHITE	9003

Other colors according to the "Colors Template" / RAL pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873
CERTIFICATE ISO 14001
RoHS 2011/65/UE

Before starting the assembly, please refer to the instructions provided with the fixture. Due to the dynamic development of lighting technology, additional information is available at the customer's request. Condensation that may occur in fixtures is a natural phenomenon and does not affect the quality of the fixture.