



NORLYS ASKER POLE PRO 5168

Asker pole pro
5168XX0009
16.09.2026 v.09.14
www.norlys.no

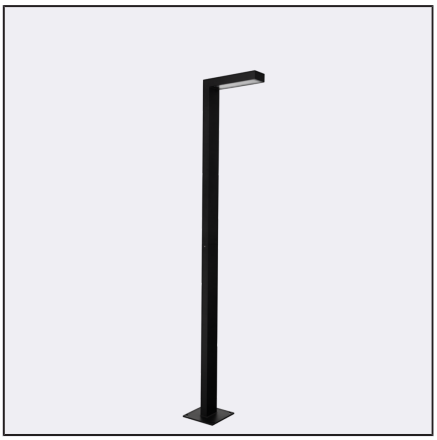

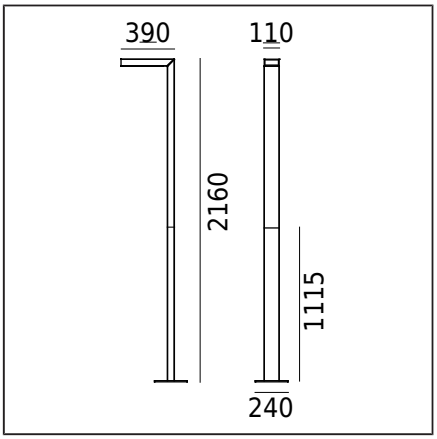

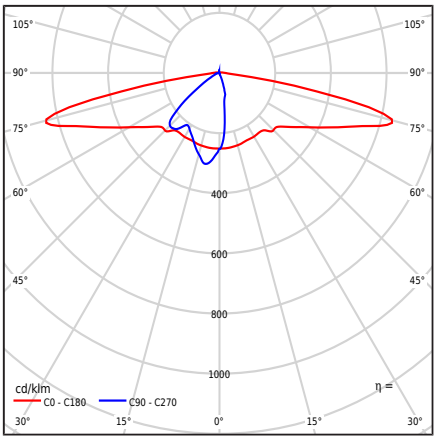

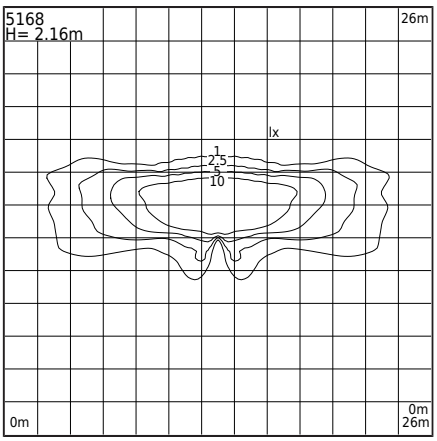

Type of luminaire

Type of luminaire	Pole luminaire (light construction).
Photometric body	Ledil lens type T2-L (IESNA type III)
Characteristics of the luminaire	For illuminating private areas, park areas, and other architectural concepts. The wide, even light beam is perfect for illuminating: paths, sidewalks, etc. Sealing of the lighting and connection chamber IP65.

General information

Materials	Extruded aluminum profile, powder coated. The outer hermetic lens - transparent PMMA plastic Silicone gasket.
Mounting method	Mounting of the luminaire: 4 holes ø12mm, spacing 200x200mm, Other accessories must be purchased separately
Terminal	Connection terminals: max 5x4mm², Possibility to connect the luminaire in loops max 5x4mm², Round insulated cable with a maximum diameter of ø12,5mm
Type of light source	LED module, DALI outdoor electronic power supply Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.
Light control	System light control: DALI outdoor full programm. The power supply is programmed for the maximum permitted current. Programming of other parameters after contact with the Norlys Sales Department.
Luminaire weight net / gross	10,54kg / 12,11kg
Box dimensions [cm]	25cm x 115cm x 56cm
Side area of luminaire	0,232m²

Technical data

LED module	Philips Fortimo FastFlex LED 2x6 DP G4+ 3K (Datasheet)
Driver	Yes
Driver durability	100000h
External control	DALI2 / NightDim (XI FP NLD) (User manual)
Light source wattage	6,4W
Luminaire wattage	8,6W
Lamp luminous flux	1300lm
Luminaire luminous flux	1211lm
Luminous intensity of the luminaire	1206cd
Efficiency of the luminaire	140,8lm/W
ULOR	0,84%
Color temperature	4000K
Colour consistency (McAdam ellipse)	SDCM4
Colour rendering index CRI	70
L90B10 [wg LM-80]	>100 000h
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C
This product contains light source of energy efficiency class D / EPREL	
BUG rating	B1-U2-G1

Accessories sold separately

117GA0009	Ground anchor
116ZX0009	Concreting anchor

Spare parts

ZS5168zx0009	Service set.

Files to download

Photometric LDT files	Photometric IES files
BIM Revit	BIM ArchiCAD

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

Management System ISO 9001:2015 IATF 16949:2016 TÜVRheinland CERTIFIED www.tuv.com ID 9108651873

PCC Cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before the installation, read the instructions attached to the luminaire. Due to the dynamic development of lighting technology, we provide additional information at the client's request. LED module replaceable by a person with appropriate qualifications, following applicable regulations. Condensation, which may occur in luminaires, is a natural phenomenon and does not deteriorate the quality of the luminaire

ASKER POLE PRO 5168

Indexes

Index	Color	RAL
5168AL	ALUMINUM	9006
5168BL	BLACK	9005
5168GR	GRAPHITE	7016

Other colors according to the "Colors Template" pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873
CERTIFICATE ISO 14001
RoHS 2011/65/UE

Before the installation, read the instructions attached to the luminaire. Due to the dynamic development of lighting technology, we provide additional information at the client's request. LED module replaceable by a person with appropriate qualifications, following applicable regulations. Condensation, which may occur in luminaires, is a natural phenomenon and does not deteriorate the quality of the luminaire