

KISA HEAD 5171

IP 65 | IK 08 | AC 220-240V 50-60Hz | LED | DIM

Kisa HEAD
5171XX0009
14.10.2026 v.09.11
www.norlys.no



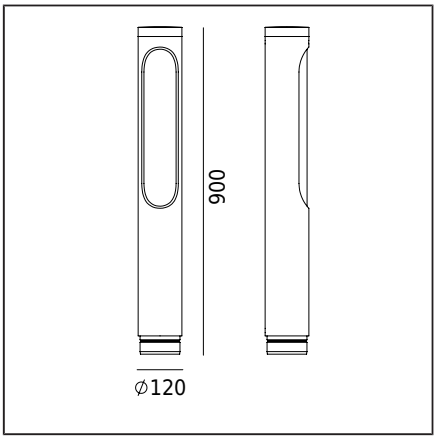

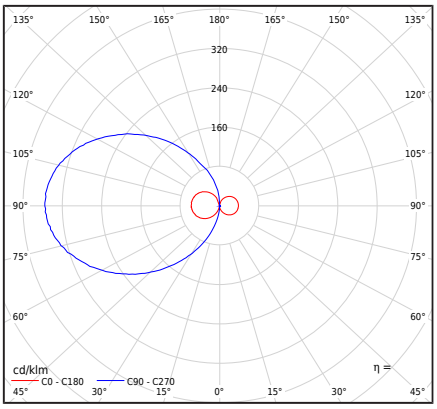

Type of luminaire

Type of luminaire	Pole luminaire.
Photometric body	Single-sided diffused light.
Characteristics of the luminaire	Luminaire with a contemporary design. For lighting gardens and other private and public areas

General information

Materials	Extruded aluminum profile, powder coated. Lens - satin PMMA plastic.
Mounting method	According to the attached assembly instructions Other accessories must be purchased separately
Terminal	Hermetic box IP68, connection terminals: max 3x4mm² Possibility to connect the luminaire in loops max 3x4mm² Round insulated cable with a diameter of ø4...14mm
Type of light source	LED module, electronic power supply Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.
Light control	Phase-dimming (TRIAC) TRAILING EDGE (TE) - LEADING EDGE (LE)
Luminaire weight net / gross	5,9kg / 6,3kg
Box dimensions [cm]	16cm x 16cm x 93cm
Luminaire dimensions [cm]	14cm x 14cm x 90cm

Technical data

3 LED Modules	Philips Fortimo Strip 0,5ft MF FC LV6 4K (Datasheet)
Driver	Yes
Driver durability	50000h
External control	Philips Xitanium TE (User manual)
Light source wattage	6,5W
Luminaire wattage	8,8W
Lamp luminous flux	1246lm
ULOR	50%
Color temperature	4000K
Colour consistency (McAdam ellipse)	SDCM3
Flicker of light (Pst LM)	≤0.3
Strobe effect (SVM)	≤0.7
Colour rendering index CRI	80
L80B20 [wg LM-80]	>72 000h
L90B10 [wg LM-80]	>64 000h
Power Factor luminaire	PF 0,90
THD factor	20%
Ta Rated temperature	25°C
Ambient operating temp. range	-20...+45°C

This product contains light sources of energy efficiency class C / EPREL

Optionally, the luminaire is also available:
- For LED color 2700K [1/1]
- For a different luminous flux value
- Version with surge protection device (SPD)
- For a different color of the luminaire (according to the RAL color palette)

Terms of sale and other information, after contactt with the Norlys Sales Department

Inrush current	1,65A/16,5µs]
BUG rating	B1-U3-G1

Maximum number of luminaires of this type per MCB:

B 10A: 157, B 16A: 254, C 10A: 264, C 16A: 340

Spare parts

ZS5171zx0009	Repair kit.

Files to download

Manual

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED
Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873

PCC Cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before the assembly, read the instructions attached to the luminaire. Installation and service work is carried out by a person with appropriate authorizations and qualifications, in accordance with applicable regulations. Due to the dynamic development of lighting technology, we provide additional information on request. Condensation that may occur in the luminaires is a natural phenomenon and does not affect the quality of the luminaire.

KISA HEAD 5171

Indexes

Index	Color	RAL
5171AL	ALUMINUM	9006
5171GR	GRAPHITE	7016

Other colors according to the "Colors Template" / RAL pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873
CERTIFICATE ISO 14001
RoHS 2011/65/UE

Before the assembly, read the instructions attached to the luminaire. Installation and service work is carried out by a person with appropriate authorizations and qualifications, in accordance with applicable regulations. Due to the dynamic development of lighting technology, we provide additional information on request. Condensation that may occur in the luminaires is a natural phenomenon and does not affect the quality of the luminaire.