

NORLYS KISA HEAD PRO 5172


IP 65 | IK 08 | LED | DALI2

KISA HEAD PRO
5172XX0009
09.11.2026 v.09.4
www.norlys.no



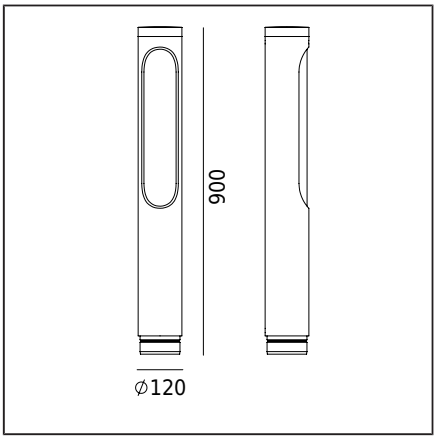

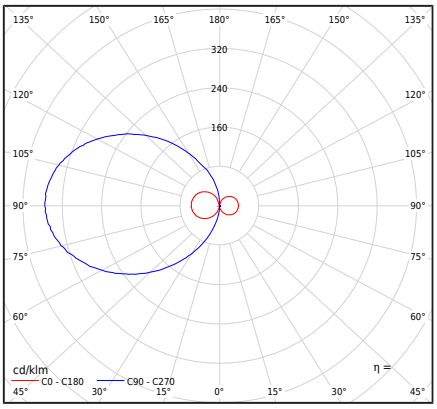

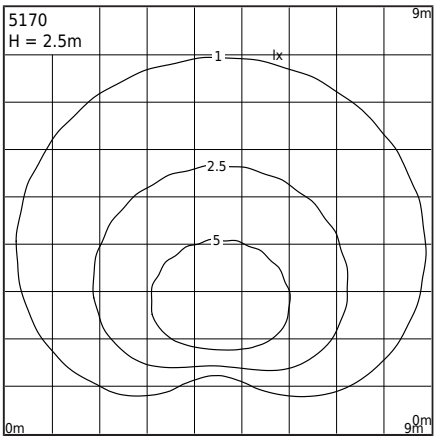

Type of luminaire

Type of luminaire	Pole luminaire.
Photometric body	Single-sided diffused light.
Characteristics of the luminaire	A fixture with contemporary design. For lighting gardens and other private areas and public spaces.

General information

Materials	Extruded aluminum profile, powder coated. Lens - satin PMMA plastic.
Mounting method	According to the included installation manual. The remaining accessories should be purchased separately.
Terminal	IP68 sealed junction box, terminal connections: max 5x4mm², ability to loop the fixture with max 5x2.5mm². Round sheathed cable with a diameter of ø8...12.5mm.
Type of light source	LED module, electronic power supply Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.
Light control	System light control: DALI outdoor full programm. The power supply is programmed for the maximum permitted current. Programming of other parameters after contact with the Norlys Sales Department.
Luminaire weight net / gross	5,9kg / 6,3kg
Box dimensions [cm]	16cm x 16cm x 93cm
Luminaire dimensions [cm]	14cm x 14cm x 90cm

Technical data

3 LED Modules	Philips Fortimo Strip 0,5ft MF FC LV6 3K (Datasheet)
Driver	Yes
Driver durability	100000h
External control	DALI2 / NightDim (XI FP NLD) (User manual)
Light source wattage	11,8W
Luminaire wattage	14,1W
Lamp luminous flux	2002lm
Luminaire luminous flux	1185lm
Efficiency of the luminaire	84lm/W
ULOR	50%
Color temperature	3000K
Colour consistency (McAdam ellipse)	SDCM3
Flicker of light (Pst LM)	≤0.1
Strobe effect (SVM)	≤0.1
Colour rendering index CRI	80
L80B20 [wg LM-80]	>72 000h
L90B10 [wg LM-80]	>64 000h
LED photobiological threat	RG0 or RG1
THD factor	7%
Overvoltage	6 / 10kV
Ta Rated temperature	25°C
Ambient operating temp. range	-20...+45°C

This product contains light sources of energy efficiency class D / EPREL

Optionally, the fixture is also available:
- for LED color 2700K [1/1]
- for a different luminous flux value
- in a version with a surge protection device (SPD)
- for a different fixture color (according to the RAL color chart)

Sales conditions and further information upon agreement with the Sales Department of Norlys.

Inrush current	15A / 295µsec
BUG rating	B1-U4-G1

Spare parts

ZS5182zx0009	Repair kit.

Files to download

Photometric LDT files | Photometric IES files

Manual

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED Management System ISO 9001:2015 IATF 16949:2016 www.tuv.com ID 9108651873

PCC cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before beginning the installation, you should familiarize yourself with the instructions attached to the fixture. Installation and service work must be carried out by a person with the appropriate authorizations and qualifications, in accordance with applicable regulations. Due to the dynamic development of lighting technology, we provide additional information at the customer's request. Condensation that may occur in fixtures is a natural phenomenon and does not affect the deterioration of the fixture's quality.

KISA HEAD PRO 5172

Indexes

Index	Color	RAL
5172AL	ALUMINUM	9006
5172GR	GRAPHITE	7016

Other colors according to the "Colors Template" / RAL pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873
CERTIFICATE ISO 14001
RoHS 2011/65/UE

Before beginning the installation, you should familiarize yourself with the instructions attached to the fixture. Installation and service work must be carried out by a person with the appropriate authorizations and qualifications, in accordance with applicable regulations. Due to the dynamic development of lighting technology, we provide additional information at the customer's request. Condensation that may occur in fixtures is a natural phenomenon and does not affect the deterioration of the fixture's quality.