

NORLYS KISA 5183


IP 55 | IK 08 | AC 220-240V 50-60Hz | LED | DALI2

Kisa 5183XX0009
14.10.2026 v.09.13
www.norlys.no



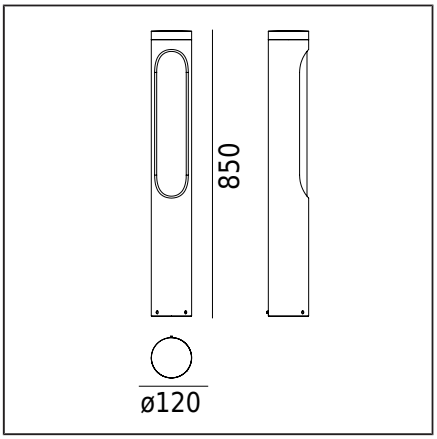

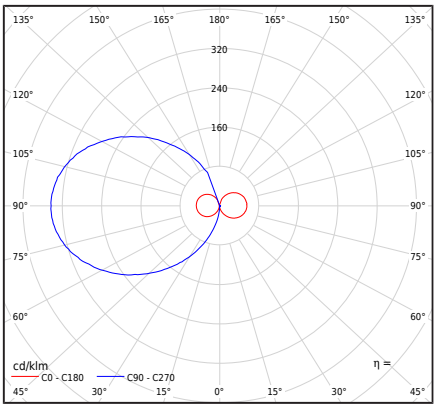

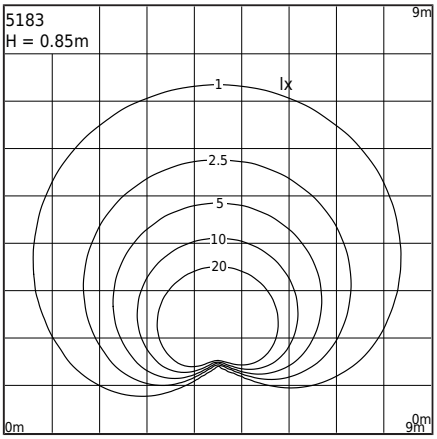

Type of luminaire

Type of luminaire	Post light fixture.
Photometric body	Single-sided diffused light.
Characteristics of the luminaire	Luminaire with contemporary design, For lighting gardens and other private and public areas

General information

Materials	Powder painted aluminum cast. Lens - satin PMMA plastic.
Mounting method	Mounting of the luminaire: 3 holes ø9mm, on the diameter of ø65mm every 120° Other accessories must be purchased separately
Terminal	Connection terminals: max 5x4mm² Possibility to connect the luminaire in loops max 5x2,5mm² Round insulated cable with a diameter of ø8...12,5mm
Type of light source	LED module, DALI outdoor electronic power supply Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.
Light control	System light control: DALI outdoor full programm. The power supply is programmed for the maximum permitted current. Programming of other parameters after contact with the Norlys Sales Department.
Luminaire weight net / gross	5,81kg / 6,81kg
Box dimensions [cm]	16cm x 16cm x 93cm
Luminaire dimensions [cm]	85cm x 12cm x 12cm

Technical data

3 LED Modules	Philips Fortimo Strip 0,5ft MF FC LV6 4K (Datasheet)
Driver	Yes
Driver durability	100000h
External control	DALI2 / NightDim (XI FP NLD) (User manual)
Light source wattage	11,8W
Luminaire wattage	14,1W
Lamp luminous flux	2122lm
Luminaire luminous flux	1222lm
Efficiency of the luminaire	86,7lm/W
ULOR	50%
Color temperature	4000K
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	80
L80B20 [wg LM-80]	>72 000h
L90B10 [wg LM-80]	>64 000h
LED photobiological threat	RG0 or RG1
THD factor	7%
Overvoltage	6 / 10kV
Ta Rated temperature	25°C
Ambient operating temp. range	-20...+45°C

This product contains light sources of energy efficiency class A C / EPREL

Optionally, the luminaire is also available:
- In the dimmable version
- For the LED color 2700K [1/1]
- For a different value of the luminous flux
- For a different color of the fitting (according to the RAL color palette)

Terms of sale and other information, after consultation with the Sales Department of Norlys

Inrush current	15A / 295µs
BUG rating	B1-U3-G1

Accessories sold separately

3086GA0009	Mounting adapter
3080GA0009	Mounting adapter
205ZX0010	Concreting anchor
206GA0010	Ground anchor
206GA0S10	Adapter for concrete foundation

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC Cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before the installation, read the instructions attached to the luminaire. Due to the dynamic development of lighting technology, we provide additional information at the client's request. Condensation, which may occur in luminaires, is a natural phenomenon and does not deteriorate the quality of the luminaire

Spare parts

ZS5183zx0009	Repair kit.

Files to download

Photometric LDT files	Photometric IES files
Manual	

Indexes

Index	Color	RAL
5183AL	ALUMINUM	9006
5183GR	GRAPHITE	7016

Other colors according to the "Colors Template" / RAL pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873

CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before the installation, read the instructions attached to the luminaire. Due to the dynamic development of lighting technology, we provide additional information at the client's request. Condensation, which may occur in luminaires, is a natural phenomenon and does not deteriorate the quality of the luminaire