
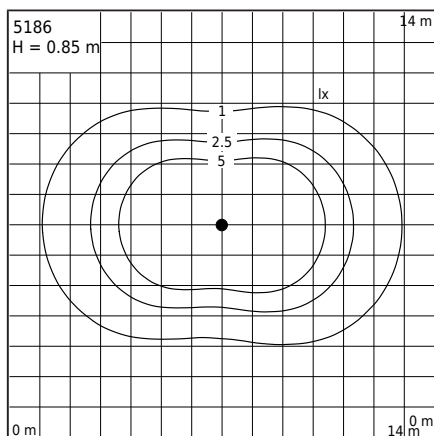
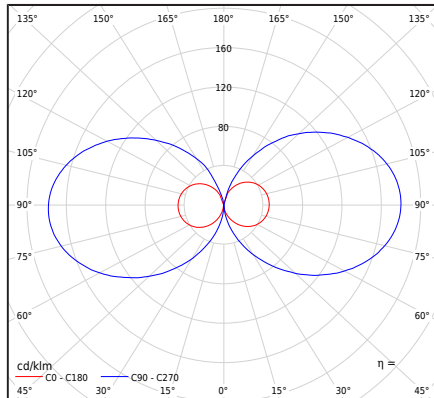


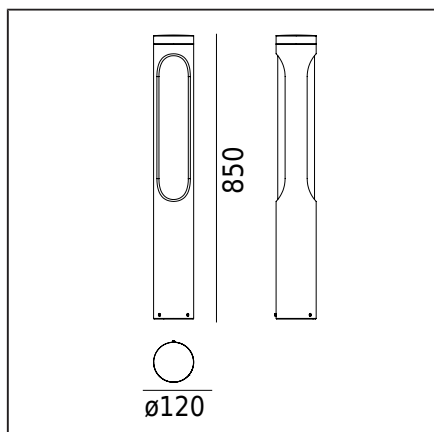

Type of luminaire

Type of luminaire	Post light fixture.
Photometric body	Two-sided diffused light
Characteristics of the luminaire	Luminaire with contemporary design For lighting gardens and other private and public areas

General information

Materials	Powder painted aluminum cast. Lens - satin PMMA plastic.
Mounting method	Mounting of the luminaire: 3 holes Ø9mm, on the diameter of Ø65mm every 120° Other accessories must be purchased separately
Terminal	Connection terminals: max 3x4mm² Possibility to connect the luminaire in loops of max 3x2,5mm² Round insulated cable with a diameter of Ø8...12,5mm
Type of light source	LED module, DALI outdoor electronic power supply Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.
Light control	System light control: DALI outdoor full programm. The power supply is programmed for the maximum permitted current. Programming of other parameters after contact with the Norlys Sales Department.
Net / gross weight of luminaire	5,9kg / 6,9kg
Box dimensions [cm]	16cm x 16cm x 93cm
Luminaire dimensions [cm]	85cm x 12cm x 12cm

Technical data

Driver durability	100000h
External control	DALI2 / NightDim (XI FP NLD) (User manual)
Luminaire wattage	27W
Luminaire luminous flux	2432lm
Efficiency of the luminaire	90,1lm/W
Color temperature	3000K
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	80
Rated life time L70/B50 at 25°C	>70 000h
LED photobiological threat	RG0 or RG1
Power Factor luminaire	PF 0,99
THD factor	7%
Overvoltage	6 / 10kV
Ta Rated temperature	25°C
Ambient temperature	Ta max=+65°C

This product contains light sources of energy efficiency class **A** / **E** EPREL

Optionally, the luminaire is also available:

- In the dimmable version
- For the LED color 2700K [I/I]
- For a different value of the luminous flux
- For a different color of the fitting (according to the RAL color palette)

Terms of sale and other information, after consultation with the Sales Department of Norlys

Inrush current	21A / 225µs
BUG rating	B1-U4-G2

Accessories sold separately

206GA0010	Ground anchor
205ZX0010	Concreting anchor
3080GA0009	Mounting adapter
3086GA0009	Mounting adapter

Spare parts

ZS5186zx0009	Service set.
--------------	--------------

Files to download

Manual



Indexes

Index	Color	RAL
5186AL	ALUMINUM	9006
5186GR	GRAPHITE	7016