
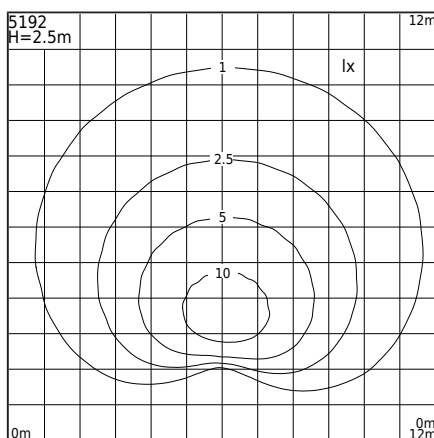
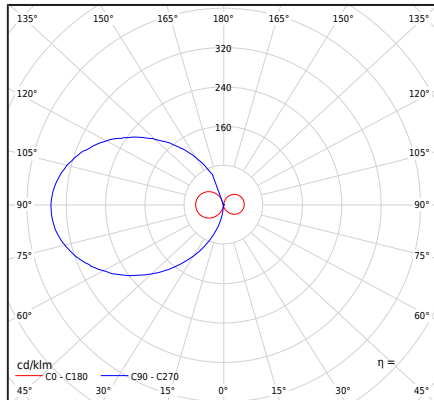


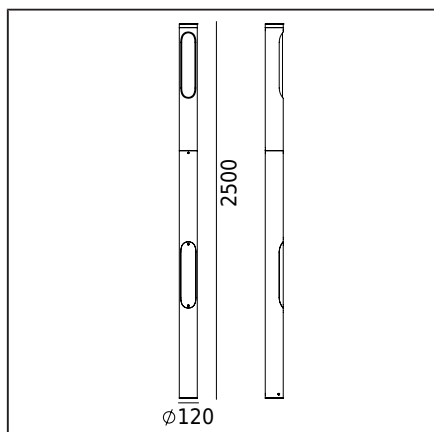

Type of luminaire

Type of luminaire	Pole luminaire (light construction).
Photometric body	Single-sided light
Characteristics of the luminaire	Luminaire with a contemporary design For lighting gardens and other private and public areas Top-mounted pole luminaire $\varnothing 120$ mm, equipped with: - Pole art. 5188xx0009 equipped with an revision door - Head art. 5172xx0009 equipped with LED module and hermetic electric box Other accessories must be ordered separately

General information

Materials	Powder painted aluminum cast. Lens - satin PMMA plastic.
Mounting method	Mounting of the luminaire : 3 holes $\varnothing 9$ mm, diameter $\varnothing 65$ mm, every 120° Other accessories must be purchased separately
Terminal	Hermetic box IP68: Connection terminals: max $5 \times 4 \text{ mm}^2$ Possibility of connecting the luminaire in loops of max. $5 \times 2,5 \text{ mm}^2$ Round insulated with a diameter of: $\varnothing 8 \dots 14 \text{ mm}$
Type of light source	LED module, DALI outdoor electronic power supply Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.
Light control	System light control: DALI outdoor full programm. The power supply is programmed for the maximum permitted current. Programming of other parameters after contact with the Norlys Sales Department.
Net / gross weight of luminaire	14,6kg / 15,7kg
Box dimensions [cm]	13cm x 13cm x 170cm
Luminaire dimensions [cm]	12cm x 12cm x 250cm

Technical data

Driver durability	100000h
External control	DALI2 / NightDim (XI FP NLD) (User manual)
Luminaire wattage	14,1W
Luminaire luminous flux	1185lm
Efficiency of the luminaire	84lm/W
Color temperature	3000K
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	80
Rated life time L70/B50 at 25°C	>70 000h
LED photobiological threat	RG0 or RG1
THD factor	7%
Overvoltage	6 / 10kV
Ta Rated temperature	25°C
Ambient temperature	Ta max = $+65^\circ\text{C}$

This product contains light sources of energy efficiency class **A** / **C** / **EPREL**

Optionally, the luminaire is also available:

- Phase dimmable version
 - For LED color 2700K [I/I]
 - For a different luminous flux value
 - For a different color of the luminaire (according to the RAL color palette)
- Terms of sale and other information, after contact with the Norlys Sales Department

Inrush current	15A / 295 μs
BUG rating	B1-U3-G1

Accessories sold separately

5188XX0009

Spare parts

ZS5182zx0009 Service set.

Files to download

Photometric LDT files

Photometric IES files

Manual



Indexes

Index	Color	RAL
5192AL	ALUMINUM	9006
5192GR	GRAPHITE	7016