

# NORLYS ASKER POLE PRO 5200


AC 220-240V 50-60Hz | IP 65 | IK 08 | LED | DALI2

Asker pole pro
5200XX0011
16.09.2026 v.11.17
www.norlys.no

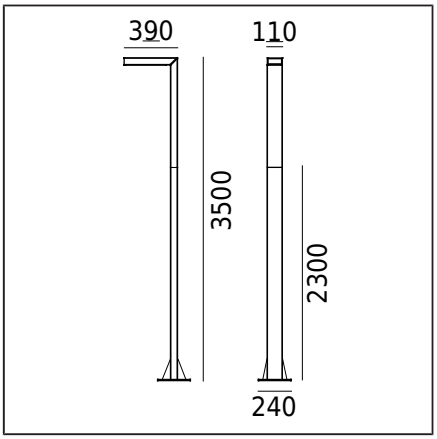

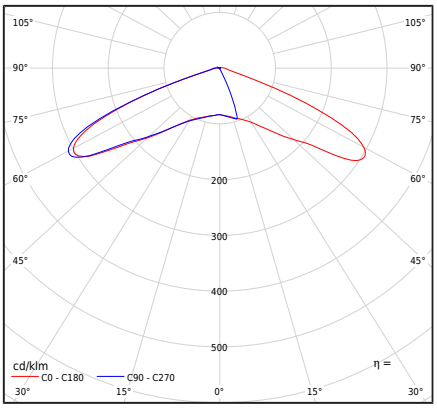


## Type of luminaire
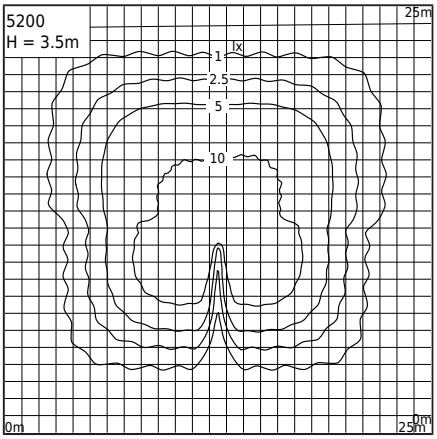
| | |
|---|---|
| Type of luminaire | Pole luminaire |
| Photometric body | Lens from Ledil type VSM (IESNA type V) |
| Characteristics of the luminaire | For lighting private areas, parks, and other architectural concepts.<br>Wide, uniform light beam. |

## General information

| | |
|---|---|
| Materials | Extruded aluminum profile, powder coated. The outer hermetic lens - transparent PMMA plastic Silicone gasket. |
| Mounting method | Fixture mounting: 4 holes for M14 pins Hole spacing 180x180mm compatible with the B 50 foundation<br>According to the attached installation instructions.<br>Other accessories must be purchased separately. |
| Terminal | Connection terminals: max 5x4mm²,<br>possibility to connect the luminaire in a loop max 5x2.5mm²<br>Cable with a round jacket diameter: ø4...8mm; ø8...12mm or ø10...13.6mm |
| Type of light source | LED module, DALI outdoor electronic power supply<br>Replaceable (LED only) light source by a professional.<br>Replaceable control gear by a professional. |
| Light control | System light control: DALI outdoor full programm. The power supply is programmed for the maximum permitted current. Programming of other parameters after contact with the Norlys Sales Department. |
| Luminaire weight net / gross | 11kg / 17,05kg |
| Box dimensions [cm] | 232,5cm x 41cm x 41,5cm |
| Luminaire dimensions [cm] | 39cm x 11cm x 350cm |
| Side area of luminaire | 0,39m² |

## Technical data

| | |
|---|---|
| LED module | Philips Fortimo FastFlex LED 2x6 DP G5 3K (Datasheet) |
| Driver | Yes |
| Driver durability | 100000h |
| External control | DALI2 / NightDim (XI FP NLD) (User manual) |
| Light source wattage | 16,8W |
| Luminaire wattage | 19,5W |
| Luminaire luminous flux | 2668lm |
| Efficiency of the luminaire | 136,8lm/W |
| ULOR | 0,9% |
| Color temperature | 3000K |
| Colour consistency (McAdam ellipse) | SDCM5 |
| Colour rendering index CRI | 70 |
| L90B10 [wg LM-80] | >100 000h |
| Power Factor luminaire | PF 0,99 |
| Ta Rated temperature | +25°C |
| Ambient operating temp. range | -20...+45°C |

This product contains light source of energy efficiency class D / EPREL

Optionally, the luminaire is also available:
- Operating mode/dimming: DALI/TD; DALI outdoor full program
- On special order, other available operating modes / dimming as part of the "middle of the night" DALI outdoor system
AstroDim / Dynadimmer
- In the version with a motion sensor type: HF, PIR
- For a different luminous flux value
- Version with surge protection device (SPD)
- For a different color of the luminaire (according to the RAL color palette)
- For a different luminaire height
Terms of sale and other information, after contact with the Norlys Sales Department

| | |
|---|---|
| BUG rating | B2-U2-G1 |

## Accessories sold separately

| | |
|---|---|
| 1259GA0009 | Mounting adapter |
| 180GA0009 | Ground anchor |
| 3091GA0009 | Concreting anchor |

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED Management System ISO 9001:2015 IATF 16949:2016 www.tuv.com ID 9108651873

PCC cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before the instalation, read the instructions attached to the luminaire. Installation and service work is carried out by a person with appropriate authorizations and qualifications, in accordance with applicable regulations. Due to the dynamic development of lighting technology, we provide additional information on request.
Condensation that may occur in the luminaires is a natural phenomenon and does not affect the quality of the luminaire.

# ASKER POLE PRO 5200



## Spare parts

| | |
|---|---|
| ZS5200zx0011 | Service set. |

## Files to download

| | |
|---|---|
| Photometric LDT files | Photometric IES files |
| Manual | |

## Indexes

| Index | Color | RAL |
|---|---|---|
| 5200AL | ALUMINUM | 9006 |
| 5200BL | BLACK | 9005 |
| 5200GR | GRAPHITE | 7016 |

Other colors according to the "Colors Template" pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873
CERTIFICATE ISO 14001
RoHS 2011/65/UE

Before the instalation, read the instructions attached to the luminaire. Installation and service work is carried out by a person with appropriate authorizations and qualifications, in accordance with applicable regulations. Due to the dynamic development of lighting technology, we provide additional information on request.
Condensation that may occur in the luminaires is a natural phenomenon and does not affect the quality of the luminaire.