

NORLYS ASKER POLE PRO 5202


AC 220-240V 50-60Hz | IP 65 | IK 10 | LED | DIM

Asker pole pro
5202XX0011
16.09.2026 v.11.24
www.norlys.no



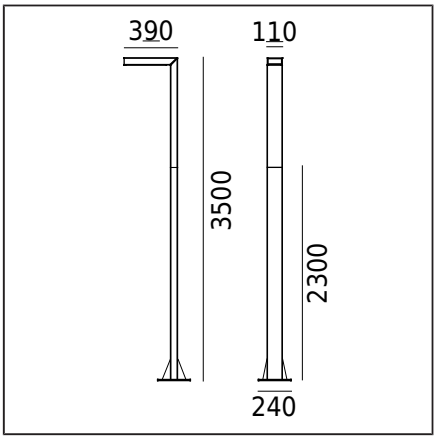

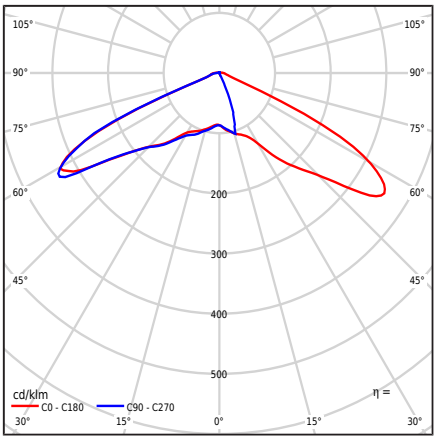

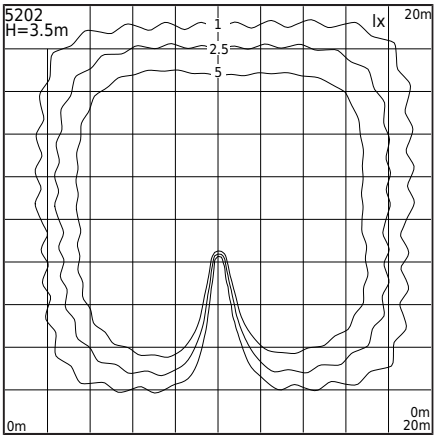

Type of luminaire

Type of luminaire	Pole luminaire
Photometric body	Lens from Ledil type VSM (IESNA type V)
Characteristics of the luminaire	For the lighting of private areas, parks, and other architectural concepts. Wide and even light stream.

General information

Materials	Extruded aluminum profile, powder coated. The outer hermetic lens - transparent PMMA plastic Silicone gasket.
Mounting method	Fixture mounting: 4 holes for M14 pins Hole spacing 180x180mm fitting on B 50 concrete foundation According to the attached installation instructions. Other accessories must be purchased separately.
Terminal	Connection terminals: max 3x4mm², possibility of connecting the fixture in a loop max 3x4mm² Cable in a round sheath with a diameter: ø8...12mm or ø10...13.6mm
Type of light source	Optical kit with IP67 (LED module and lens); electronic power supply Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.
Light control	Phase-dimming (TRIAC) TRAILING EDGE (TE) - LEADING EDGE (LE)
Luminaire weight net / gross	11kg / 17,05kg
Box dimensions [cm]	232,5cm x 41cm x 41,5cm
Luminaire dimensions [cm]	24cm x 48,5cm x 350cm
Side area of luminaire	0,39m²

Technical data

LED module	Philips Fortimo FastFlex LED 2x6 DP G5 3K (Datasheet)
Driver	Yes
Driver durability	100000h
Light source wattage	16,8W
Luminaire wattage	19,5W
Lamp luminous flux	2667lm
Luminaire luminous flux	2660lm
Efficiency of the luminaire	136,4lm/W
ULOR	1%
Color temperature	3000K
Colour consistency (McAdam ellipse)	SDCM5
Colour rendering index CRI	70
L90B10 [wg LM-80]	>100 000h
Power Factor luminaire	PF 0,95
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C

This product contains light source of energy efficiency class D / EPREL

Optional luminaire also available:
- For other viewing angles
- For a different luminous flux value
- For a different color of the luminaire (according to the RAL color palette)

Terms of sale and other information, after contact with the Norlys Sales Department.

BUG rating	B2-U2-G1

Accessories sold separately

1259GA0009	Mounting adapter
180GA0009	Ground anchor
3091GA0009	Concreting anchor

Spare parts

ZS5202zx0011	Service set.

Files to download

Photometric LDT files	Photometric IES files
Manual	

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before the installation, please read the instructions included with the luminaire. Installation and service work are carried out by a person with appropriate authorizations and qualifications, in accordance with applicable regulations. Due to the dynamic development of lighting technology, we provide additional information upon customer request. Condensation that may occur in luminaires is a natural phenomenon and does not affect the quality of the luminaire.

ASKER POLE PRO 5202

Indexes

Index	Color	RAL
5202AL	ALUMINUM	9006
5202BL	BLACK	9005
5202GR	GRAPHITE	7016

Other colors according to the "Colors Template" pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

Before the installation, please read the instructions included with the luminaire. Installation and service work are carried out by a person with appropriate authorizations and qualifications, in accordance with applicable regulations. Due to the dynamic development of lighting technology, we provide additional information upon customer request. Condensation that may occur in luminaires is a natural phenomenon and does not affect the quality of the luminaire.