

NORLYS ASKER POLE PRO 5203


AC 220-240V 50-60Hz | IP 65 | IK 10 | LED | DIM

Asker pole pro
5203XX0011
16.09.2026 v.11.16
www.norlys.no



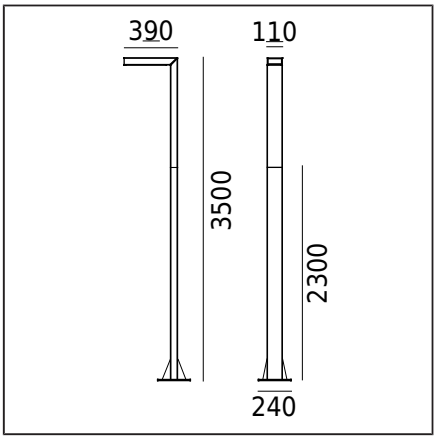

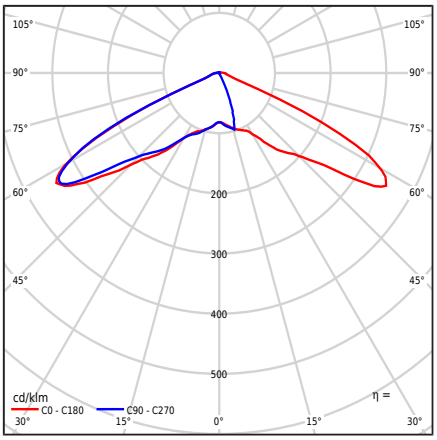

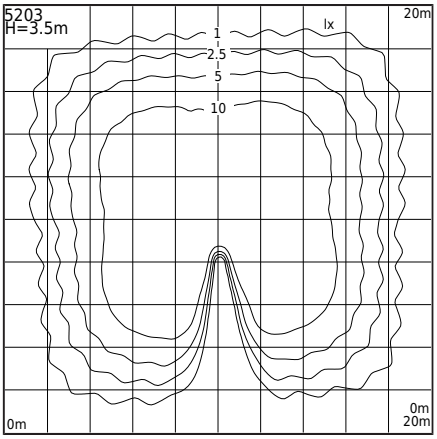

Type of luminaire

Type of luminaire	Pole luminaire
Photometric body	Lens from Ledil type VSM (IESNA type V)
Characteristics of the luminaire	For lighting private areas, park spaces, and other architectural concepts. A wide, uniform light beam.

General information

Materials	Extruded aluminum profile, powder coated. The outer hermetic lens - transparent PMMA plastic Silicone gasket.
Mounting method	Luminaire mounting: 4 holes for M14 pins, hole spacing 180x180mm According to the attached assembly instructions. Other accessories must be purchased separately
Terminal	Connection terminals: max 3x4mm² Possibility of connecting the luminaire in loops of max. 3x4mm² Round insulated cable with a diameter of ø8...12mm or ø10...13,6mm
Type of light source	Optical kit with IP67 (LED module and lens); electronic power supply Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.
Light control	Phase-dimming (TRIAC) TRAILING EDGE (TE) - LEADING EDGE (LE)
Luminaire weight net / gross	11kg / 17,05kg
Box dimensions [cm]	232,5cm x 41cm x 41,5cm
Luminaire dimensions [cm]	230cm x 11cm x 39cm
Side area of luminaire	0,39m²

Technical data

LED module	Philips Fortimo FastFlex LED 2x6 DP G5 4K (Datasheet)
Driver	Yes
Light source wattage	16,8W
Luminaire wattage	19,5W
Lamp luminous flux	2772lm
Luminaire luminous flux	2790lm
Efficiency of the luminaire	143,1lm/W
ULOR	1%
Color temperature	4000K
Colour consistency (McAdam ellipse)	SDCM5
Colour rendering index CRI	70
L90B10 [wg LM-80]	>100 000h
Power Factor luminaire	PF 0,95
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C

This product contains light source of energy efficiency class D / EPREL

Optionally, the luminaire is also available:
- For other lighting angles
- For a different luminous flux value
- For a different color of the luminaire (according to the RAL color palette)

Terms of sale and other information, after contact with the Norlys Sales Department

BUG rating	B2-U2-G1

Accessories sold separately

1259GA0009	Mounting adapter
180GA0009	Ground anchor
3091GA0009	Concreting anchor

Spare parts

ZS5202zx0011	Service set.

Files to download

Photometric LDT files	Photometric IES files
Manual	

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before the assembly, read the instructions attached to the luminaire. Installation and service work is carried out by a person with appropriate authorizations and qualifications, in accordance with applicable regulations. Due to the dynamic development of lighting technology, we provide additional information on request.
Condensation that may occur in the luminaires is a natural phenomenon and does not affect the quality of the luminaire

ASKER POLE PRO 5203



Asker pole pro
5203XX0011
16.09.2026 v.11.16
www.norlys.no

Indexes

Index	Color	RAL
5203AL	ALUMINUM	9006
5203BL	BLACK	9005
5203GR	GRAPHITE	7016

Other colors according to the "Colors Template" pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873
CERTIFICATE ISO 14001
RoHS 2011/65/UE

Before the assembly, read the instructions attached to the luminaire. Installation and service work is carried out by a person with appropriate authorizations and qualifications, in accordance with applicable regulations. Due to the dynamic development of lighting technology, we provide additional information on request.
Condensation that may occur in the luminaires is a natural phenomenon and does not affect the quality of the luminaire