


NORLYS ASKER POLE PRO 5223


AC 220-240V 50-60Hz | IP 65 | IK 08 | LED | DALI2

Asker pole pro
5223XX0009
16.09.2026 v.09.13
www.norlys.no

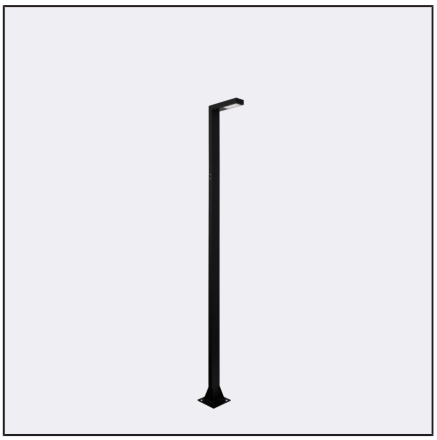

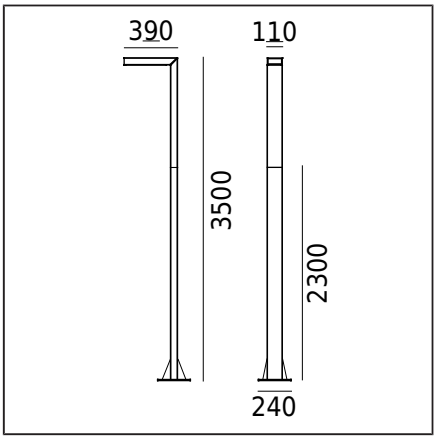

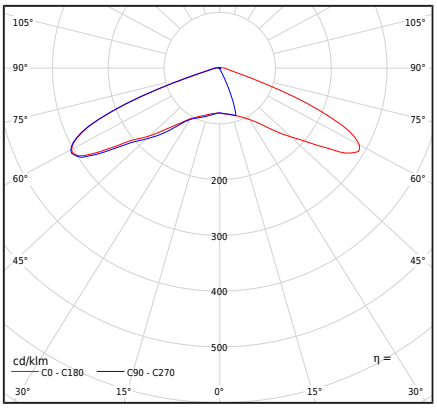

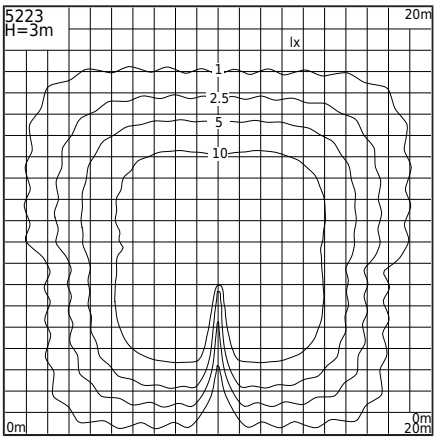

Type of luminaire

Type of luminaire	Pole luminaire
Photometric body	Lens from Ledil type VSM (IESNA type V)
Characteristics of the luminaire	For lighting private areas, parks, and other architectural concepts. Wide and even light beam.

General information

Materials	Extruded aluminum profile, powder coated. The outer hermetic lens - transparent PMMA plastic Silicone gasket.
Mounting method	Mounting of the luminaire: 4 holes for M14 pins Hole spacing 180x180mm According to the attached assembly instructions Other accessories must be purchased separately
Terminal	Connection terminals: max 3x4mm² Possibility of connecting the luminaire in loops of max. 3x2.5mm² Round insulated cable with a diameter: ø4...8mm; ø8...12mm or ø10...13.6mm
Type of light source	LED module, DALI outdoor electronic power supply Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.
Light control	System light control: DALI outdoor full programm. The power supply is programmed for the maximum permitted current. Programming of other parameters after contact with the Norlys Sales Department.
Luminaire weight net / gross	11kg / 17,05kg
Box dimensions [cm]	232,5cm x 28cm x 28cm
Luminaire dimensions [cm]	24cm x 48,5cm x 300cm
Side area of luminaire	0,35m²

Technical data

LED module	Philips Fortimo FastFlex LED 2x6 DP G5 4K (Datasheet)
Driver	Yes
Driver durability	100000h
External control	DALI2 / NightDim (XI FP NLD) (User manual)
Light source wattage	16,8W
Luminaire wattage	19,7W
Luminaire luminous flux	2681lm
Efficiency of the luminaire	136,1lm/W
ULOR	1%
Color temperature	4000K
Colour consistency (McAdam ellipse)	SDCM5
Colour rendering index CRI	70
L90B10 [wg LM-80]	>100 000h
Power Factor luminaire	PF 0,99
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C

This product contains light source of energy efficiency class D / EPREL

Optional fixture also available:
- Operating mode/dimming: DALI/TD ; DALI outdoor full program
- Upon special request, other available operating modes/dimming as part of the DALI outdoor "middle of the night" system AstroDim/Dynadimmer
- Version with motion sensor type: HF, PIR
- For a different luminous flux value
- Version with surge protection device (SPD)
- For a different color of the fixture (according to the RAL color palette)
- For a different height

Terms of sale and other information, after contact with the Norlys Sales Department

BUG rating	B2-U2-G1

Accessories sold separately

1259GA0009	Mounting adapter
180GA0009	Ground anchor
3091GA0009	Concreting anchor

Spare parts

ZS5200zx0011	Service set.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC Cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before the installation, please read the instructions included with the fixture. Installation and service work are carried out by a person with appropriate authorizations and qualifications, in accordance with applicable regulations. Due to the dynamic development of lighting technology, we provide additional information upon customer request. Condensation that may occur in luminaires is a natural phenomenon and does not affect the quality of the luminaire

NORLYS ASKER POLE PRO 5223



Asker pole pro
5223XX0009
16.09.2026 v.09.13
www.norlys.no

Files to download

Photometric LDT files	Photometric IES files
Manual	

Indexes

Index	Color	RAL
5223AL	ALUMINUM	9006
5223BL	BLACK	9005
5223GR	GRAPHITE	7016

Other colors according to the "Colors Template" pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED
Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873

PCC Cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before the installation, please read the instructions included with the fixture. Installation and service work are carried out by a person with appropriate authorizations and qualifications, in accordance with applicable regulations. Due to the dynamic development of lighting technology, we provide additional information upon customer request. Condensation that may occur in luminaires is a natural phenomenon and does not affect the quality of the luminaire