



# NORLYS ASKER POLE PRO 5224

asker pole pro
5224XX0009
16.09.2026 v.09.16
www.norlys.no

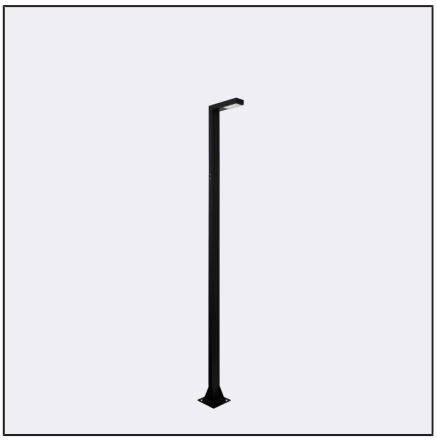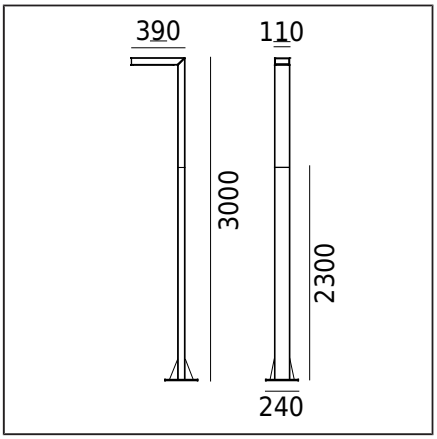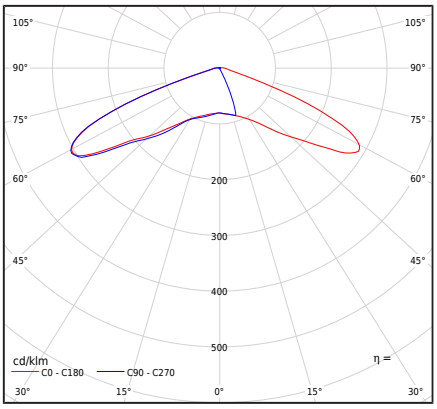

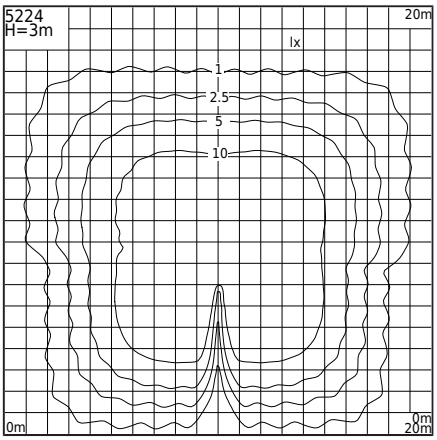


## Type of luminaire

| | |
|---|---|
| Type of luminaire | Pole luminaire |
| Photometric body | Lens from Ledil type VSM (IESNA type V) |
| Characteristics of the luminaire | For lighting private areas, parks, and other architectural concepts. A wide, even light distribution. |

## General information

| | |
|---|---|
| Materials | Extruded aluminum profile, powder coated. The outer hermetic lens - transparent PMMA plastic Silicone gasket. |
| Mounting method | Mounting the fixture: 4 holes for M14 pins Hole spacing 180x180mm<br>In accordance with the included installation instructions.<br>Other accessories must be purchased separately.<br>Fits B-50 foundation |
| Terminal | Connection terminals: max 5x2.5mm$^2$,<br>possibility of looping the fixture max 5x2.5mm$^2$.<br>Cable in a round sheath with a diameter: ø8...12mm or ø10...13.6mm |
| Type of light source | Optical kit with IP67 (LED module and lens); electronic power supply<br>Replaceable (LED only) light source by a professional.<br>Replaceable control gear by a professional. |
| Light control | Phase-dimming (TRIAC) TRAILING EDGE (TE) - LEADING EDGE (LE) |
| Luminaire weight net / gross | 10kg / 11kg |
| Box dimensions [cm] | 232,5cm x 26cm x 26cm |
| Luminaire dimensions [cm] | 24cm x 48,5cm x 300cm |
| Side area of luminaire | 0,35m$^2$ |

## Technical data

| | |
|---|---|
| LED module | Philips Fortimo FastFlex LED 2x6 DP G5 3K (Datasheet) |
| Driver | Yes |
| Driver durability | 100000h |
| Light source wattage | 16,8W |
| Luminaire wattage | 19,5W |
| Lamp luminous flux | 2667lm |
| Luminaire luminous flux | 2660lm |
| Efficiency of the luminaire | 136,4lm/W |
| ULOR | 1% |
| Color temperature | 3000K |
| Colour consistency (McAdam ellipse) | SDCM5 |
| Colour rendering index CRI | 70 |
| L90B10 [wg LM-80] | >100 000h |
| Power Factor luminaire | PF 0,95 |
| Ta Rated temperature | +25°C |
| Ambient operating temp. range | -20...+45°C |

This product contains light source of energy efficiency class D / EPREL

Optional fixture also available:
- For other viewing angles
- For a different luminous flux value
- For a different color of the fixture (according to the RAL color palette)

Terms of sale and other information, after contact with the Norlys Sales Department

| | |
|---|---|
| BUG rating | B2-U2-G1 |

## Accessories sold separately

| | |
|---|---|
| 1259GA0009 | Mounting adapter |
| 180GA0009 | Ground anchor |
| 3091GA0009 | Concreting anchor |

## Spare parts

| | |
|---|---|
| ZS5200zx0010 | Service set. |

## Files to download

| | |
|---|---|
| Photometric LDT files | Photometric IES files |
| Manual | |

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED
Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873

PCC Cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before the installation, please read the instructions included with the fixture. Installation and service work are carried out by a person with appropriate authorizations and qualifications, in accordance with applicable regulations. Due to the dynamic development of lighting technology, we provide additional information upon customer request. Condensation that may occur in luminaires is a natural phenomenon and does not affect the quality of the luminaire

# ASKER POLE PRO 5224



## Indexes

| Index | Color | RAL |
|---|---|---|
| 5224AL | ALUMINUM | 9006 |
| 5224BL | BLACK | 9005 |
| 5224GR | GRAPHITE | 7016 |

Other colors according to the "Colors Template" pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

Before the installation, please read the instructions included with the fixture. Installation and service work are carried out by a person with appropriate authorizations and qualifications, in accordance with applicable regulations. Due to the dynamic development of lighting technology, we provide additional information upon customer request. Condensation that may occur in luminaires is a natural phenomenon and does not affect the quality of the luminaire