



NORLYS ASKER POLE PRO 5226

asker pole pro
5226XX0009
16.09.2026 v.09.16
www.norlys.no

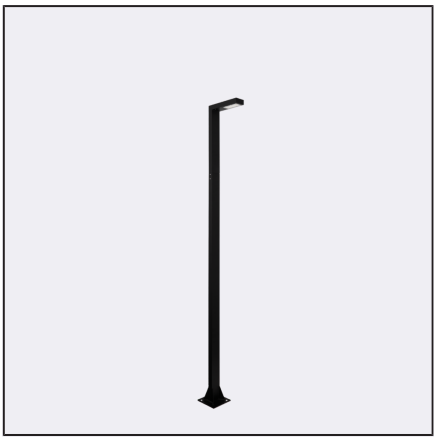

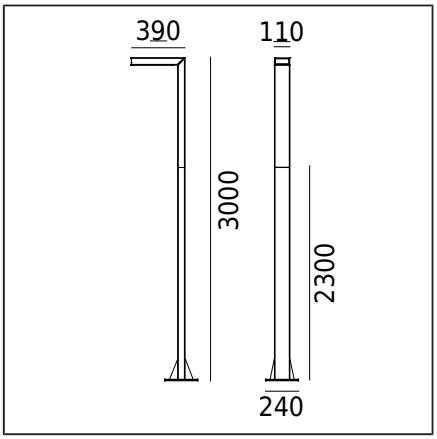

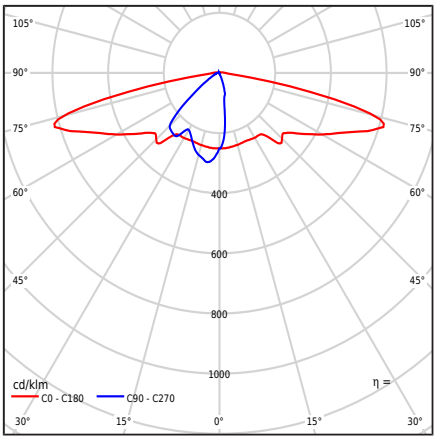

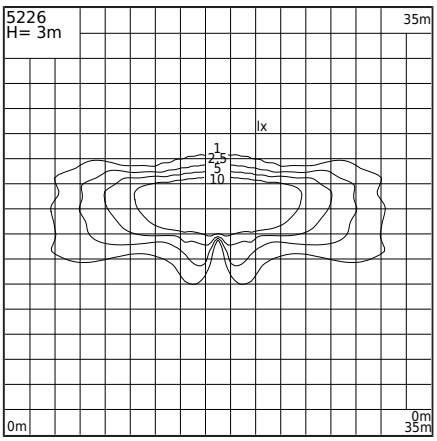

Type of luminaire

Type of luminaire	Pole luminaire
Photometric body	Ledil lens type T2-L (IESNA type III)
Characteristics of the luminaire	For illumination of private areas, park settings, and other architectural concepts. Wide, even light distribution.

General information

Materials	Extruded aluminum profile, powder coated. The outer hermetic lens - transparent PMMA plastic Silicone gasket.
Mounting method	Mounting of the luminaire: 4 holes for M14 pins, hole spacing 180x180mm According to the attached assembly instructions. Other accessories must be purchased separately Fits the B-50 concrete foundation
Terminal	Connection terminals: max 5x2.5mm² Possibility of connecting the luminaire in loops of max. 5x2.5mm² Round insulated cable with a diameter: ø8...12mm or ø10...13.6mm
Type of light source	Optical kit with IP67 (LED module and lens); electronic power supply Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.
Light control	System light control: DALI outdoor full programm. The power supply is programmed for the maximum permitted current. Programming of other parameters after contact with the Norlys Sales Department.
Luminaire weight net / gross	10kg / 11kg
Box dimensions [cm]	232,5cm x 26cm x 26cm
Luminaire dimensions [cm]	24cm x 48,5cm x 300cm
Side area of luminaire	0,35m²

Technical data

LED module	Philips Fortimo FastFlex LED 2x6 DP G5 3K (Datasheet)
Driver	Yes
Driver durability	100000h
External control	DALI2 / NightDim (XI FP NLD) (User manual)
Light source wattage	16,8W
Luminaire wattage	19,5W
Lamp luminous flux	2628lm
Luminaire luminous flux	2602lm
Luminous intensity of the luminaire	2331cd
Efficiency of the luminaire	133,4lm/W
ULOR	0,91%
Color temperature	3000K
Colour consistency (McAdam ellipse)	SDCM5
Colour rendering index CRI	70
L90B10 [wg LM-80]	>100 000h
Power Factor luminaire	PF 0,99
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C

This product contains light source of energy efficiency class D / EPREL

Optional fixture also available:
- For other viewing angles
- For a different luminous flux value
- For a different color of the fixture (according to the RAL color palette)

Terms of sale and other information, after contact with the Norlys Sales Department

BUG rating	B1-U2-G1

Accessories sold separately

1259GA0009	Mounting adapter
3091GA0009	Concreting anchor

Spare parts

ZS5204zx0010	Service set.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

Management System ISO 9001:2015 IATF 16949:2016
TÜVRheinland CERTIFIED
www.tuv.com ID 9108651873

PCC cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before the installation, please read the instructions included with the fixture. Installation and service work are carried out by a person with appropriate authorizations and qualifications, in accordance with applicable regulations. Due to the dynamic development of lighting technology, we provide additional information upon customer request. Condensation that may occur in luminaires is a natural phenomenon and does not affect the quality of the luminaire

NORLYS ASKER POLE PRO 5226



asker pole pro
5226XX0009
16.09.2026 v.09.16
www.norlys.no

Files to download

Photometric LDT files	Photometric IES files
Manual	

Indexes

Index	Color	RAL
5226AL	ALUMINUM	9006
5226BL	BLACK	9005
5226GR	GRAPHITE	7016

Other colors according to the "Colors Template" pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED
Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873

PCC Cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before the installation, please read the instructions included with the fixture. Installation and service work are carried out by a person with appropriate authorizations and qualifications, in accordance with applicable regulations. Due to the dynamic development of lighting technology, we provide additional information upon customer request. Condensation that may occur in luminaires is a natural phenomenon and does not affect the quality of the luminaire