

# NORLYS VISBY 576


AC 220-240V 50-60Hz | IP 65 | IK 05 | LED

Visby 576XX0309
10.11.2026 v.09.9
www.norlys.no

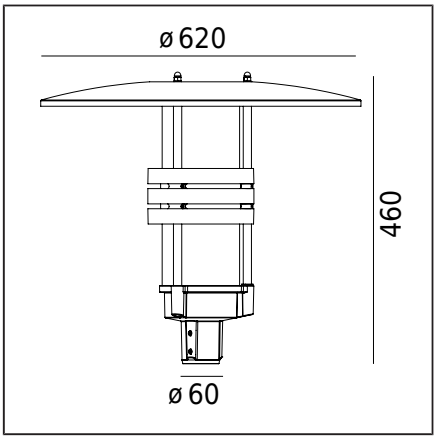

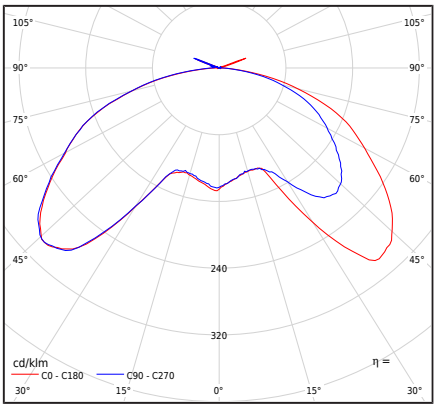


## Type of luminaire
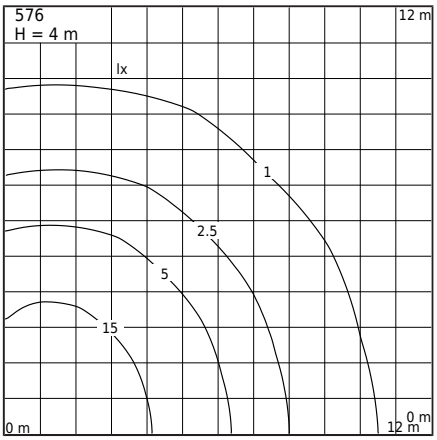
| | |
|---|---|
| Type of luminaire | Pole luminaire. |
| Photometric body | Light with rotationally symmetrical light distribution (direct/indirect light). |
| Characteristics of the luminaire | Surface-mounted luminaire designed to be installed on a lighting pole with a mounting post of Ø60mm. |

## General information

| | |
|---|---|
| Materials | Powder painted aluminum cast. Lens - transparent plastic PMMA. Silicone gasket. |
| Mounting method | Mounting of the luminaire: the luminaire is adapted to the Ø60mm post<br><br>Set include:<br>Art. 6014 - lighting fixture<br>Art .6013 - Visby roof<br>Other accessories must be ordered separately |
| Terminal | 4.5m H05VV-F 3G1 cable for connecting inside the lighting pole (in properly selected wiring box). The ability to control the LED modules (on / off): Lighting of the upper and lower modules,<br>or only the upper module (indirect light, 3000lm / 27W),<br>or only the lower module (direct light, 2000lm / 17.5W) |
| Type of light source | LED module AC integrated<br>Replaceable (LED only) light source by a professional. |
| Light control | Non-dimmable fixture |
| Luminaire weight net / gross | 7,35kg / 8,99kg |
| Side area of luminaire | 0,086m$^2$ |

## Technical data

| | |
|---|---|
| 2 LED modules | Philips Fortimo DLM ES 3000/8xx G2 3K (Datasheet) |
| Light source wattage | 44,5W |
| Luminaire wattage | 44,5W |
| Lamp luminous flux | 4900lm |
| Luminaire luminous flux | 2465lm |
| Efficiency of the luminaire | 55,4lm/W |
| ULOR | 1,75% |
| Color temperature | 3000K |
| Colour consistency (McAdam ellipse) | SDCM3 |
| Colour rendering index CRI | 80 |
| L70TM-21 [wg LM-80] | >50 000h |
| Power Factor luminaire | PF > 0,9 |
| Ta Rated temperature | +25°C |
| Ambient operating temp. range | -20...+45°C |
| This product contains light sources of energy efficiency class A-G E / EPREL | |
| Inrush current | 5,26 / 47,27µs |
| BUG rating | "B1-U2-G1" |

Maximum number of luminaires of this type per MCB:

B 10A: 28, B 16A: 45, C 10A: 46, C 16A: 76

## Accessories sold separately

| | |
|---|---|
| 3070XX0009 | Reduction |
| 154XX0010 | Mounting adapter |
| 7660XX0009 | Reduction |

## Spare parts

| | |
|---|---|
| 0905760100 | Electrical service kit. |

## Files to download

| | |
|---|---|
| Photometric LDT files | Photometric IES files |
| Manual | |


Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no


TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC cert CERTIFICATE ISO 14001

RoHS 2011/65/UE


Before the installation, read the instructions attached to the luminaire. Due to the dynamic development of lighting technology, we provide additional information at the client's request. Information about recommended light sources based on manufacturers' data from 2016. We are not responsible for the completeness and validity of the offer, therefore we refer to the applicable technical information of the manufacturers of light sources. Condensation, which may occur in luminaires, is a natural phenomenon and does not deteriorate the quality of the luminaire

## Indexes

| Index | Color | RAL |
|---|---|---|
| 576AL | ALUMINUM | 9006 |
| 576GR | GRAPHITE | 7016 |

Other colors according to the "Colors Template" / RAL pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873

CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before the installation, read the instructions attached to the luminaire. Due to the dynamic development of lighting technology, we provide additional information at the client's request. Information about recommended light sources based on manufacturers' data from 2016. We are not responsible for the completeness and validity of the offer, therefore we refer to the applicable technical information of the manufacturers of light sources. Condensation, which may occur in luminaires, is a natural phenomenon and does not deteriorate the quality of the luminaire