
NORLYS VISBY 6017



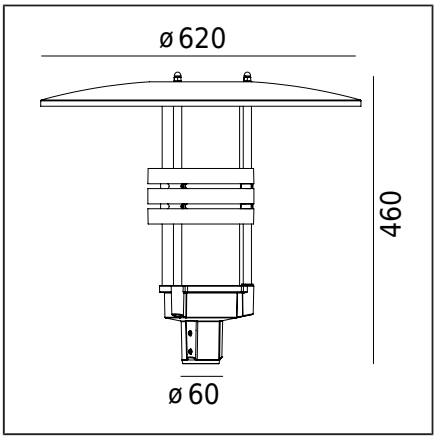

Type of luminaire

Type of luminaire	Pole luminaire.
Photometric body	Light with rotationally symmetrical light distribution (direct/indirect light).
Characteristics of the luminaire	Surface-mounted luminaire designed to be installed on a lighting pole with a mounting post of Ø60mm.

General information

Materials	Powder painted aluminum cast. Lens - transparent plastic PMMA. Silicone gasket.
Mounting method	Fixing of the luminaire: fitting to Ø60mm pole. The luminaire is sold without a hat. Accessories must be ordered separately.
Terminal	H05VV-F 3G1 cable, 4,5m long, for connection inside the lighting pole (in appropriately selected electrical installation box). Possibility to control LED modules (on / off): upper and lower module lighting, or only the upper module (indirect light, 3000lm / 27W), or only the lower module (direct light, 2000lm / 17.5W).
Type of light source	LED module AC integrated
Light control	Non-dimmable fixture
Luminaire weight net / gross	5,4kg / 6,3kg
Box dimensions [cm]	53cm x 23,5cm x 23,5cm

Technical data

2 LED modules	Philips Fortimo LED DLM ES 3000lm/2000lm G2
Light source wattage	44,5W
Luminaire wattage	44,5W
Lamp luminous flux	4900lm
ULOR	1,7%
Color temperature	4000K
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	80
Power Factor luminaire	PF > 0,9
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C
This product contains light sources of energy efficiency class A-G D	
Inrush current	2,63A / 47,27µs

Maximum number of luminaires of this type per MCB:

B 10A: 28, B 16A: 45, C 10A: 46, C 16A: 76

Accessories sold separately

3070XX0009	Reduction
154XX0010	Mounting adapter
7660XX0009	Reduction

Spare parts

0950020200	Electrical service kit.

Files to download

Manual

Indexes

Index	Color	RAL
6017AL	ALUMINUM	9006

Other colors according to the "Colors Template" / RAL pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED
Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873
PCC Cert CERTIFICATE ISO 14001
RoHS 2011/65/UE

Please read the manual before installing. Due to the dynamic development of lighting technology, additional information is available upon request. LED module must be replaced by a qualified person in accordance with applicable regulations. Condensation, which can occur in luminaires, is a natural phenomenon and does not impair the quality of the luminaire.