

NORLYS EGERSUND PARK 6091


IP 65 | IK 08 | AC 220-240V 50-60Hz | LED | DIM

Egersund Park
6091XX0009
14.10.2026 v.09.14
www.norlys.no



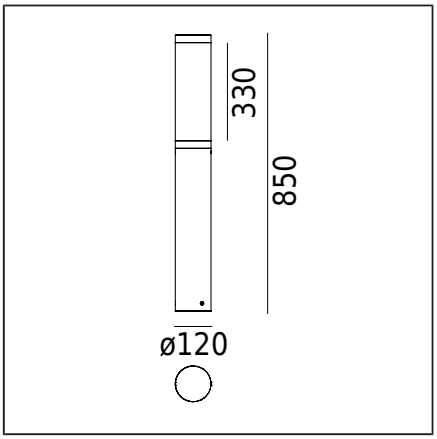

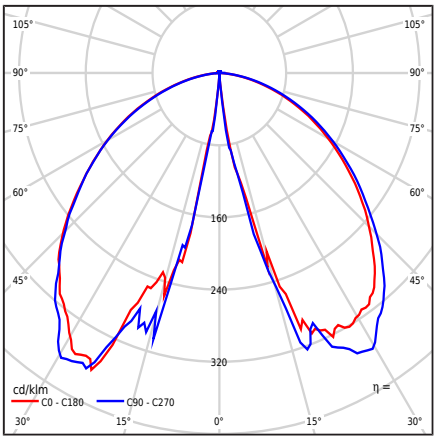

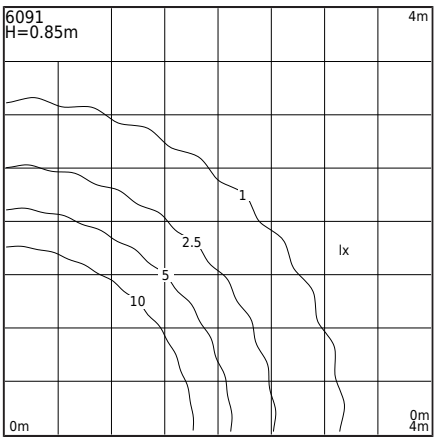

Type of luminaire

Type of luminaire	Post light fixture.
Photometric body	Symmetrical light directed downwards.
Characteristics of the luminaire	Luminaire with a contemporary design. For garden illumination and other private and public areas

General information

Materials	Powder painted aluminum cast. Lens - transparent plastic PMMA. Silicone gasket.
Mounting method	Luminaire mounting: 3 holes ø9mm on a diameter of ø65mm every 120° According to the attached assembly instructions Other accessories must be purchased separately
Terminal	Connection terminals: max 2x4mm² Possibility of connecting the luminaire in loops of max. 2x4mm² Round insulated cable with a diameter of: ø8...12mm or ø10...14mm Other connection systems as accessories must be purchased separately
Type of light source	LED module, electronic power supply Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.
Light control	Phase-dimming (TRIAC) TRAILING EDGE (TE) - LEADING EDGE (LE)
Luminaire weight net / gross	4,85kg / 5,63kg
Box dimensions [cm]	16cm x 16cm x 93cm
Luminaire dimensions [cm]	85cm x 12cm x 12cm

Technical data

LED module	Cree DK210704 V2 JB2835 3V 4K (Datasheet)
Driver	Yes
Light source wattage	7,4W
Luminaire wattage	9,1W
Lamp luminous flux	1462lm
Luminaire luminous flux	935lm
Efficiency of the luminaire	102,7lm/W
ULOR	1%
Color temperature	4000K
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	80
L80TM-21 [wg LM-80]	>102 000h
L90 TM-21 [wg LM-80]	>52 600h
Power Factor luminaire	PF 0,9
THD factor	10%
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C

This product contains light source of energy efficiency class C / EPREL

Optionally, the luminaire is also available:
- operation mode/dimming: DALI/TD ; DALI outdoor full programme
- In the safety class for KL I
- For LED color 2700K [1/1]
- For a different luminous flux value
- Version with surge protection device (SPD)
- For a different color of the luminaire (according to the RAL color palette)
- For a different luminaire height

Terms of sale and other information, after contact with the Norlys Sales Department

Inrush current	2A / 50µs
BUG rating	B1-U1-G0

Accessories sold separately

205ZX0010	Concreting anchor
206GA0010	Ground anchor
206GA0S10	Adapter for concrete foundation

Spare parts

ZS6091zx0009	Electrical repair kit.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED Management System ISO 9001:2015 IATF 16949:2016 www.tuv.com ID 9108651873
PCC Cert CERTIFICATE ISO 14001
RoHS 2011/65/UE

EGERSUND PARK 6091

Files to download

Photometric LDT files	Photometric IES files
Manual	BIM Revit
BIM ArchiCAD	

Indexes

Index	Color	RAL
6091AL	ALUMINUM	9006
6091GR	GRAPHITE	7016

Other colors according to the "Colors Template" / RAL pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no