

NORLYS EGERSUND PARK 6092


AC 220-240V 50-60Hz | IP 65 | IK 08 | LED | DALI2

Egersund Park
6092XX0009
14.10.2026 v.09.22
www.norlys.no



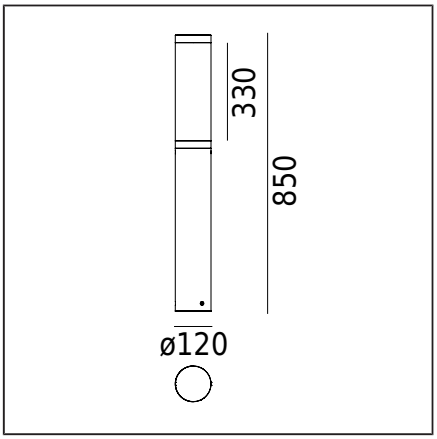

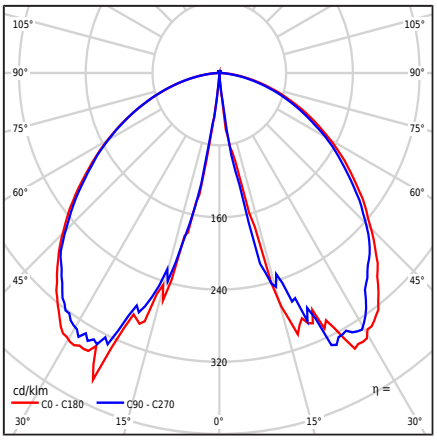

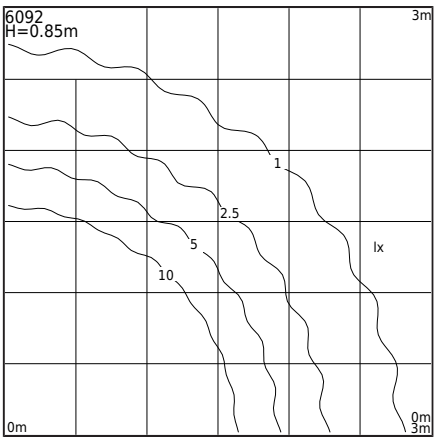

Type of luminaire

Type of luminaire	Post light fixture.
Photometric body	Symmetrical light directed downwards.
Characteristics of the luminaire	Luminaire with a contemporary design For lighting gardens and other private and public areas

General information

Materials	Powder painted aluminum cast. Lens - transparent plastic PMMA. Silicone gasket.
Mounting method	Luminaire mounting: 3 holes ø9mm on a diameter of ø65mm every 120° According to the attached assembly instructions Other accessories must be purchased separately
Terminal	Connection terminals: max 5x4mm² Possibility of connecting the luminaire in loops of max. 5x2.5mm² Round insulated cable with a diameter of: ø8...12mm or ø10...14mm
Type of light source	LED module, DALI outdoor electronic power supply Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.
Light control	System light control: DALI outdoor full programm. The power supply is programmed for the maximum permitted current. Programming of other parameters after contact with the Norlys Sales Department.
Luminaire weight net / gross	4,9kg / 5,86kg
Box dimensions [cm]	16cm x 16cm x 93cm
Luminaire dimensions [cm]	85cm x 12cm x 12cm

Technical data

LED module	Cree DK210704 V2 JB2835 3V 3K (Datasheet)
Driver	Yes
Driver durability	100000h
External control	DALI2 / NightDim (XI FP NLD) (User manual)
Light source wattage	20,5W
Luminaire wattage	23,9W
Lamp luminous flux	3363lm
Luminaire luminous flux	2258lm
Efficiency of the luminaire	94,5lm/W
ULOR	1%
Color temperature	3000K
Colour consistency (McAdam ellipse)	SDCM3
Flicker of light (Pst LM)	≤0.2
Strobe effect (SVM)	≤0.1
Colour rendering index CRI	80
L80TM-21 [wg LM-80]	>102 000h
L90 TM-21 [wg LM-80]	>52 600h
Power Factor luminaire	PF 0,99
THD factor	7%
Overvoltage	6 / 10kV
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C

This product contains light source of energy efficiency class C / EPREL

Optionally, the luminaire is also available:
- operation mode/dimming: DALI/TD
- or other operation mode/dimming: DALI outdoor full programme
- In the safety class for KL II
- For LED color 2700K [1/1]
- For a different luminous flux value
- Version with surge protection device (SPD)
- For a different color of the luminaire (according to the RAL color palette)
- For a different luminaire height

Terms of sale and other information, after contact with the Norlys Sales Departme

Inrush current	15A / 295µs
BUG rating	B1-U2-G1

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED
Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873
PCC Cert CERTIFICATE ISO 14001
RoHS 2011/65/UE

EGERSUND PARK 6092

AC 220-240V 50-60Hz | IP 65 | IK 08 | LED | DALI2

Accessories sold separately

205ZX0010	Concreting anchor
206GA0010	Ground anchor
206GA0S10	Adapter for concrete foundation

Spare parts

ZS6092zx0009	Electrical repair kit.

Files to download

Photometric LDT files	Photometric IES files
Manual	BIM Revit
BIM ArchiCAD	

Indexes

Index	Color	RAL
6092AL	ALUMINUM	9006
6092GR	GRAPHITE	7016

Other colors according to the "Colors Template" / RAL pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED
Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873
PCC Cert CERTIFICATE ISO 14001
RoHS 2011/65/UE