


NORLYS EGERSUND PARK 6105

Egersund park
6105XX0311
16.09.2026 v.11.27
www.norlys.no



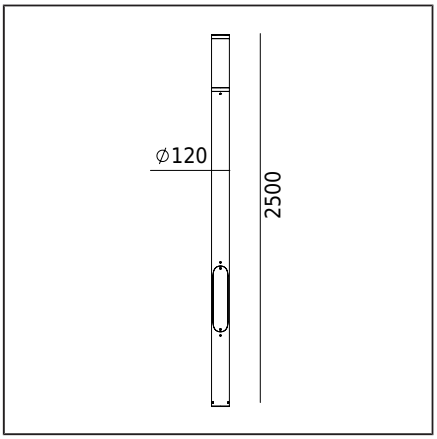

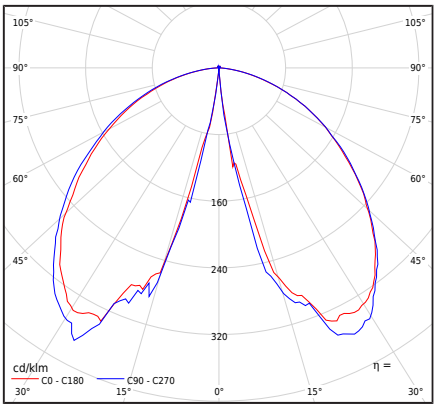

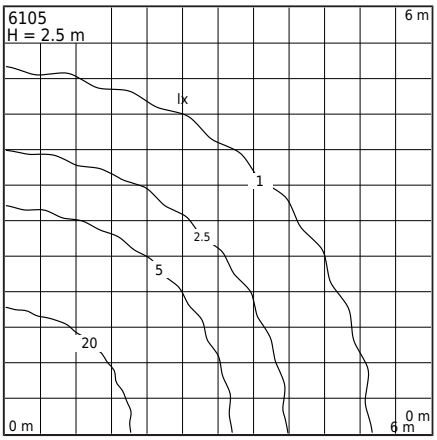

Type of luminaire

Type of luminaire	Pole luminaire (light construction).
Photometric body	Symmetrical light directed downwards.
Characteristics of the luminaire	Post-top lighting fixture ø120mm, equipped with: - Lighting pole art. 6101xx0010 with inspection doors - Lighting head fixture art. 6106xx0011 - Hermetically sealed junction box - IK10 pole construction - IK05 lighting chamber

General information

Materials	Powder painted aluminum cast. Lens - transparent plastic PMMA. Silicone gasket.
Mounting method	Mounting of the luminaire: 3 holes ø9mm in diameter ø65mm every 120° According to the attached instructions Other accessories must be purchased separately
Terminal	Hermetic box IP68: Connection terminals: max 2x4mm² Possibility of connecting the luminaire in loops max 2x2,5mm² Round insulted cable with a diameter of ø8...12mm or ø10...14mm The luminaire is equipped with a revision door
Type of light source	LED module, electronic power supply Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.
Light control	Phase-dimming (TRIAC) TRAILING EDGE (TE) - LEADING EDGE (LE)
Luminaire weight net / gross	13kg / 14,1kg
Box dimensions [cm]	15cm x 15cm x 260cm
Luminaire dimensions [cm]	12cm x 12cm x 250cm
Side area of luminaire	0,33m²

Technical data

LED module	Cree DK210704 V2 JB2835 3V 3K (Datasheet)
Driver	Yes
Light source wattage	7,4W
Luminaire wattage	9,1W
Lamp luminous flux	1370lm
Luminaire luminous flux	907lm
Efficiency of the luminaire	99,7lm/W
ULOR	1%
Color temperature	3000K
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	80
L80TM-21 [wg LM-80]	>102 000h
L90 TM-21 [wg LM-80]	>52 600h
Power Factor luminaire	PF 0,9
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C

This product contains light source of energy efficiency class C / EPREL

Optionally, the luminaire is also available:
- For the LED color 2700K [1/1]
- For a different value of the luminous flux
Technical data and terms of sale, after contact with the Sales Department of Norlys

BUG rating	B1-U1-G0

Accessories sold separately

6133GA0009	Mounting adapter
6130XX0009	Concreting anchor
6132GA0009	Mounting adapter

Spare parts

ZS6105zs0311	Service set.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED
Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873
PCC Cert CERTIFICATE ISO 14001
RoHS 2011/65/UE

Before the installation, read the instructions attached to the luminaire. Due to the dynamic development of lighting technology, we provide additional information at the client's request. Condensation, which may occur in luminaires, is a natural phenomenon and does not deteriorate the quality of the luminaire

EGERSUND PARK 6105

Files to download

Photometric LDT files	Photometric IES files
Manual	

Indexes

Index	Color	RAL
6105AL	ALUMINUM	9006
6105GR	GRAPHITE	7016

Other colors according to the "Colors Template" pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873
CERTIFICATE ISO 14001
RoHS 2011/65/UE

Before the installation, read the instructions attached to the luminaire. Due to the dynamic development of lighting technology, we provide additional information at the client's request. Condensation, which may occur in luminaires, is a natural phenomenon and does not deteriorate the quality of the luminaire