

NORLYS EGERSUND PARK 6106


IP 65 | IK 05 | AC 220-240V 50-60Hz | LED | DIM

Egersund park
6106XX0011
14.10.2026 v.11.26
www.norlys.no



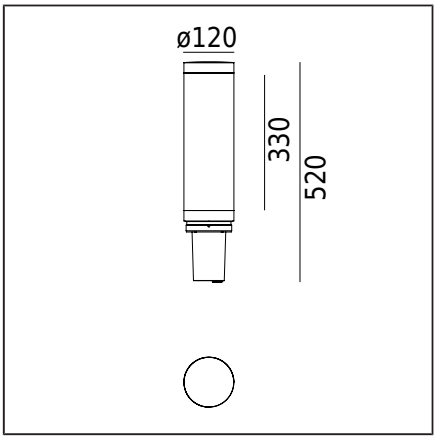

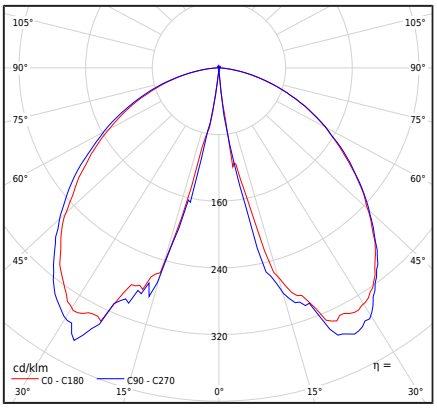

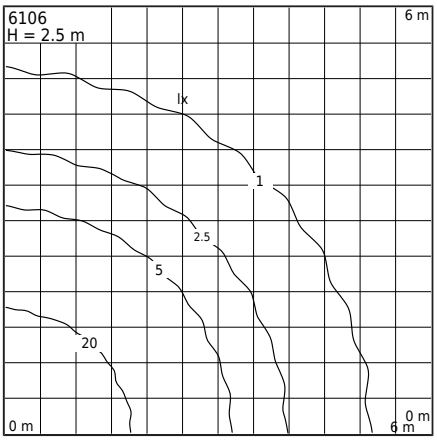

Type of luminaire

Type of luminaire	Pole luminaire.
Photometric body	Symmetrical light directed downwards.
Characteristics of the luminaire	A post-mounted lighting fixture equipped with: - a hermetic junction box - IK10 pole construction - IK05 light chamber Other accessories should be ordered separately.

General information

Materials	Powder painted aluminum cast. Lens - transparent plastic PMMA. Silicone gasket. Nylon6 cable gland.
Mounting method	Mounting of the luminaire: according to the assembly instructions
Terminal	H05VV-F 2x1 cable, 2,7 m long, ended with a hermetic IP68 electric box for connection inside the luminaire Connection terminals: max 2x4mm² Possibility of connecting the luminaire in loops max 2x4mm² Round insulated cable with a diameter of ø8...12mm or ø10...14mm
Type of light source	LED module, electronic power supply Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.
Light control	Phase-dimming (TRIAC) TRAILING EDGE (TE) - LEADING EDGE (LE)
Luminaire weight net / gross	1,96kg / 2,6kg
Box dimensions [cm]	14,5cm x 14,5cm x 70cm
Luminaire dimensions [cm]	12cm x 12cm x 52cm

Technical data

LED module	Cree DK210704 V2 JB2835 3V 3K (Datasheet)
Driver	Yes
Light source wattage	7,4W
Luminaire wattage	9,1W
Lamp luminous flux	1370lm
Luminaire luminous flux	907lm
Efficiency of the luminaire	99,7lm/W
ULOR	1%
Color temperature	3000K
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	80
L80TM-21 [wg LM-80]	>102 000h
L90 TM-21 [wg LM-80]	>52 600h
LED photobiological threat	RG0 or RG1
Power Factor luminaire	PF 0,90
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C

This product contains light source of energy efficiency class C / EPREL

Optionally, the luminaire is also available:
- For the safety class in KL I
- For the LED color 2700K [1/1]
- For a different value of the luminous flux
- For a different color of the fitting (according to the RAL color palette)

Terms of sale and other information, after contact with the Sales Department of Norlys

BUG rating	B1-U1-G0

Accessories sold separately

6133GA0009	Mounting adapter
6130XX0009	Concreting anchor
6132GA0009	Mounting adapter

Spare parts

ZS6106zx0011	Electrical repair kit.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC Cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before the installation, read the instructions attached to the luminaire. Due to the dynamic development of lighting technology, we provide additional information at the client's request. Condensation, which may occur in luminaires, is a natural phenomenon and does not deteriorate the quality of the luminaire

EGERSUND PARK 6106



Egersund park
6106XX0011
14.10.2026 v.11.26
www.norlys.no

Files to download

Photometric LDT files	Photometric IES files
Manual	

Indexes

Index	Color	RAL
6106AL	ALUMINUM	9006
6106GR	GRAPHITE	7016

Other colors according to the "Colors Template" / RAL pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

Management System ISO 9001:2015 IATF 16949:2016
TÜVRheinland CERTIFIED
www.tuv.com ID 9108651873
PCC Cert CERTIFICATE ISO 14001
RoHS 2011/65/UE

Before the installation, read the instructions attached to the luminaire. Due to the dynamic development of lighting technology, we provide additional information at the client's request. Condensation, which may occur in luminaires, is a natural phenomenon and does not deteriorate the quality of the luminaire