

NORLYS EGERSUND PARK 6107

AC 220-240V 50-60Hz | IP 65 | IK 05 | LED | DIM

Egersund park
6107XX0310
16.09.2026 v.10.16
www.norlys.no



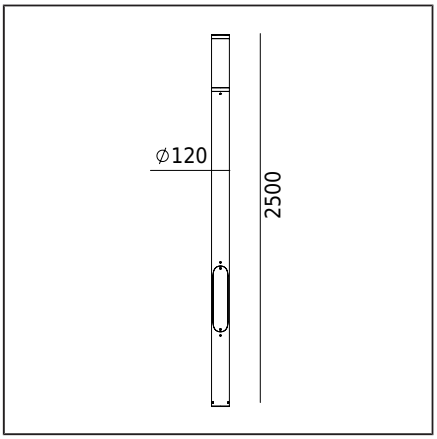

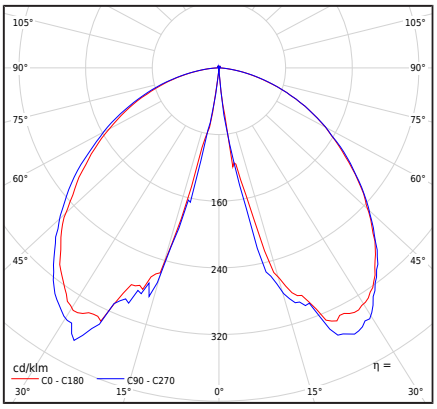

Type of luminaire

Type of luminaire	Pole luminaire (light construction).
Photometric body	Symmetrical light directed downwards.
Characteristics of the luminaire	Pole-mounted lighting fixture with a diameter of ø120mm, equipped with: - Lighting pole model 6101xx0010 with access door - Lighting fixture (head) model 6108xx0010 - Hermetic connection box - IK10 pole construction - IK05 illumination chamber

General information

Materials	Powder painted aluminum cast. Lens - transparent plastic PMMA. Silicone gasket.
Mounting method	Mounting of the luminaire: 3 holes ø9mm in diameter ø65mm every 120° According to the attached instructions Other accessories must be purchased separately
Terminal	Hermetic box IP68: Connection terminals: max 2x4mm² Possibility of connecting the luminaire in loops max 2x2,5mm² Round insulted cable with a diameter of ø8...12mm or ø10...14mm The luminaire is equipped with a revision door
Type of light source	LED module, electronic power supply Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.
Light control	Phase-dimming (TRIAC) TRAILING EDGE (TE) - LEADING EDGE (LE)
Luminaire weight net / gross	13kg / 14,01kg
Box dimensions [cm]	15cm x 15cm x 260cm
Luminaire dimensions [cm]	250cm x 12cm x 12cm
Side area of luminaire	0,33m²

Technical data

LED module	Cree DK210704 V2 JB2835 3V 4K (Datasheet)
Driver	Yes
Light source wattage	7,4W
Luminaire wattage	9,1W
Lamp luminous flux	1462lm
Luminaire luminous flux	962lm
Efficiency of the luminaire	105,7lm/W
ULOR	1%
Color temperature	4000K
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	80
L80TM-21 [wg LM-80]	>102 000h
L90 TM-21 [wg LM-80]	>52 600h
Power Factor luminaire	PF 0,9
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C

This product contains light source of energy efficiency class C / EPREL

Optionally, the luminaire is also available:
- For the LED color 2700K [1/1]
- For a different value of the luminous flux
Technical data and terms of sale, after contact with the Sales Department of Norlys

BUG rating	B1-U1-G0

Accessories sold separately

6133GA0009	Mounting adapter
6130XX0009	Concreting anchor
6132GA0009	Mounting adapter

Spare parts

ZS6107zs0310	Service set.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC Cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before the installation, read the instructions attached to the luminaire. Due to the dynamic development of lighting technology, we provide additional information at the client's request. Condensation, which may occur in luminaires, is a natural phenomenon and does not deteriorate the quality of the luminaire

EGERSUND PARK 6107

Files to download

Manual

Indexes

Index	Color	RAL
6107AL	ALUMINUM	9006
6107GR	GRAPHITE	7016

Other colors according to the "Colors Template" pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

Before the installation, read the instructions attached to the luminaire. Due to the dynamic development of lighting technology, we provide additional information at the client's request. Condensation, which may occur in luminaires, is a natural phenomenon and does not deteriorate the quality of the luminaire