


NORLYS EGERSUND PARK 6108

Egersund park
6108XX0011
14.10.2026 v.11.19
www.norlys.no



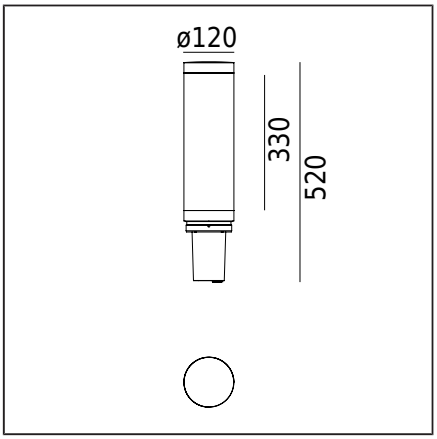

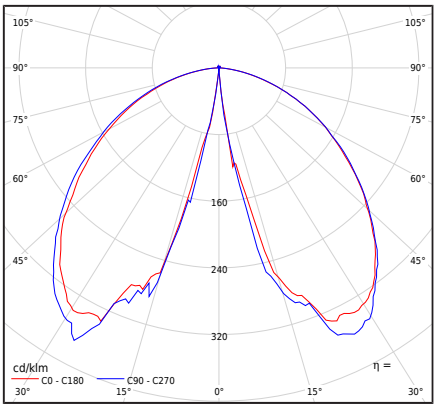

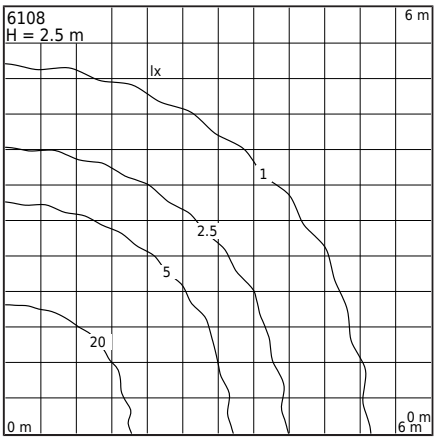

Type of luminaire

Type of luminaire	Pole luminaire.
Photometric body	Symmetrical light directed downwards.
Characteristics of the luminaire	Pole-mounted lighting fixture ø120mm equipped with: - hermetically sealed connection box - IK10 pole structure - IK05 light chamber

General information

Materials	Powder painted aluminum cast. Lens - transparent plastic PMMA. Silicone gasket. Nylon6 cable gland.
Mounting method	Mounting of the luminaire: according to the assembly instructions Other accessories must be purchased separately
Terminal	H05VV-F 2x1 cable, 2,7 m long, ended with a hermetic IP68 electric box for connection inside the luminaire Connection terminals: max 2x4mm² Possibility of connecting the luminaire in loops max 2x2,5mm² Round insulated cable with a diameter of ø8...12mm or ø10...14mm
Type of light source	LED module, electronic power supply Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.
Light control	Phase-dimming (TRIAC) TRAILING EDGE (TE) - LEADING EDGE (LE)
Luminaire weight net / gross	2,28kg / 2,88kg
Box dimensions [cm]	14,5cm x 14,5cm x 70cm
Luminaire dimensions [cm]	12cm x 12cm x 70cm

Technical data

LED module	Cree DK210704 V2 JB2835 3V 4K (Datasheet)
Driver	Yes
Light source wattage	7,4W
Luminaire wattage	9,1W
Lamp luminous flux	1462lm
Luminaire luminous flux	962lm
Efficiency of the luminaire	105,7lm/W
ULOR	1%
Color temperature	4000K
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	80
L80TM-21 [wg LM-80]	>102 000h
L90 TM-21 [wg LM-80]	>52 600h
Power Factor luminaire	PF 0,90
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C

This product contains light source of energy efficiency class C / EPREL

Optionally, the luminaire is also available:
- For the LED color 2700K [1/1]
- For a different value of the luminous flux
Technical data and terms of sale, after contact with the Sales Department of Norlys

BUG rating	B1-U1-G0

Accessories sold separately

6133GA0009	Mounting adapter
6130XX0009	Concreting anchor
6132GA0009	Mounting adapter

Spare parts

ZS6108zx0011	Electrical repair kit.

Files to download

Photometric LDT files	Photometric IES files
Manual	

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

Management System ISO 9001:2015 IATF 16949:2016
TÜVRheinland CERTIFIED
www.tuv.com ID 9108651873
PCC Cert CERTIFICATE ISO 14001
RoHS 2011/65/UE

Before the installation, read the instructions attached to the luminaire. Due to the dynamic development of lighting technology, we provide additional information at the client's request. Condensation, which may occur in luminaires, is a natural phenomenon and does not deteriorate the quality of the luminaire

EGERSUND PARK 6108

Indexes

Index	Color	RAL
6108AL	ALUMINUM	9006
6108GR	GRAPHITE	7016

Other colors according to the "Colors Template" / RAL pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873
CERTIFICATE ISO 14001
2011/65/UE

Before the installation, read the instructions attached to the luminaire. Due to the dynamic development of lighting technology, we provide additional information at the client's request. Condensation, which may occur in luminaires, is a natural phenomenon and does not deteriorate the quality of the luminaire