

NORLYS EGERSUND PARK PRO 6113


AC 220-240V 50-60Hz | IP 65 | LED | DALI2

Egersund park pro
6113XX0309
30.10.2026 v.09.51
www.norlys.no



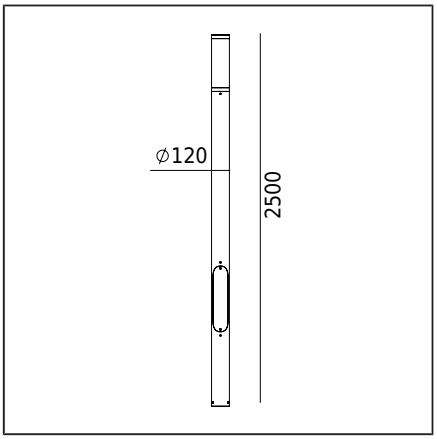

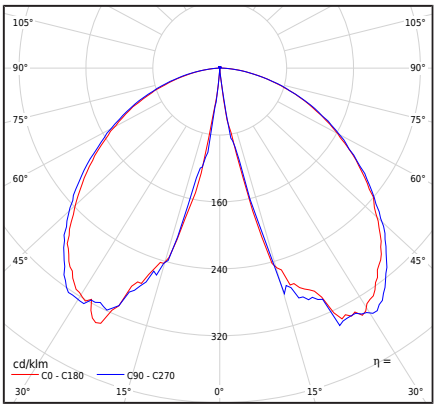

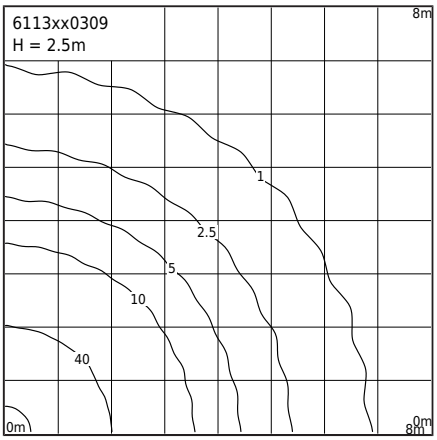

Type of luminaire

Type of luminaire	Pole luminaire (light construction).
Photometric body	Symmetrical light directed downwards.
Characteristics of the luminaire	Pole-mounted lighting fixture ø120mm, equipped with: - lighting pole art. 6101xx0010 - fixture includes inspection doors - lighting fixture (head) art. 6114xx0009 - hermetic connection box - IK10 pole structure - IK05 lighting chamber

General information

Materials	Powder painted aluminum cast. Lens - transparent plastic PMMA. Silicone gasket.
Mounting method	Mounting of the luminaire: 3 holes ø9mm in diameter ø65mm every 120° According to the attached assembly instructions Other accessories must be purchased separately
Terminal	Hermetic box IP68: Connection terminals: max 5x2,5mm² Possibility to connect the luminaire in loops, max 5x1,5mm² Round insulated cable with a diameter of ø8...17mm The luminaire is equipped with a revision door
Type of light source	LED module, DALI outdoor electronic power supply Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.
Light control	System light control: DALI outdoor full programm. The power supply is programmed for the maximum permitted current. Programming of other parameters after contact with the Norlys Sales Department.
Luminaire weight net / gross	13kg / 14,1kg
Box dimensions [cm]	15cm x 15cm x 260cm
Luminaire dimensions [cm]	12cm x 12cm x 250cm
Side area of luminaire	0,33m²

Technical data

LED module	Cree DK210704 V2 JB2835 3V 3K (Datasheet)
Driver	Yes
Driver durability	100000h
External control	DALI2 / NightDim (XI FP NLD) (User manual)
Light source wattage	20,5W
Luminaire wattage	23,7W
Lamp luminous flux	3363lm
Luminaire luminous flux	2239lm
Efficiency of the luminaire	94,5lm/W
ULOR	1%
Color temperature	3000K
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	80
L80TM-21 [wg LM-80]	>102 000h
L90 TM-21 [wg LM-80]	>52 600h
Power Factor luminaire	PF 0,99
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C

This product contains light source of energy efficiency class C / EPREL

Optionally, the luminaire is also available:
- For the LED color 2700K
- For a different value of the luminous flux
- For a different color of the luminaire (according to the RAL color palette)

Technical data and terms of sale, after contact with the Sales Department of Norlys

BUG rating	B1-U2-G1

Accessories sold separately

6133GA0009	Mounting adapter
6130XX0009	Concreting anchor
6132GA0009	Mounting adapter

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC Cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before the installation, read the instructions attached to the luminaire. Due to the dynamic development of lighting technology, we provide additional information at the client's request. Condensation, which may occur in luminaires, is a natural phenomenon and does not deteriorate the quality of the luminaire

EGERSUND PARK PRO 6113

Spare parts

ZS6113zx0309	Repair kit.

Files to download

Photometric LDT files	Photometric IES files
Manual	

Indexes

Index	Color	RAL
6113AL	ALUMINUM	9006
6113GR	GRAPHITE	7016

Other colors according to the "Colors Template" / RAL pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873
CERTIFICATE ISO 14001
RoHS 2011/65/UE

Before the installation, read the instructions attached to the luminaire. Due to the dynamic development of lighting technology, we provide additional information at the client's request. Condensation, which may occur in luminaires, is a natural phenomenon and does not deteriorate the quality of the luminaire