

NORLYS EGERSUND PARK 6117

Egersund park
6117XX0309
16.09.2026 v.09.17
www.norlys.no



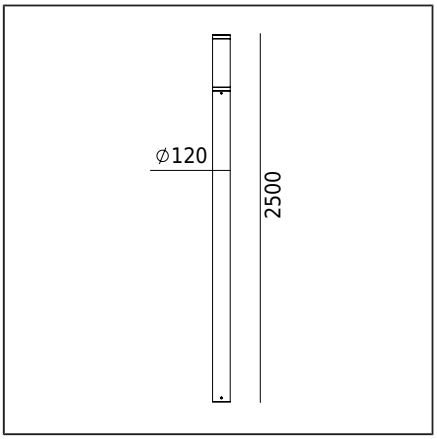

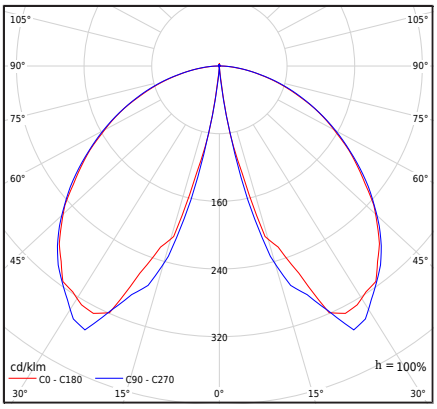

Type of luminaire

Type of luminaire	Post light fixture.
Photometric body	Downward-directed light.
Characteristics of the luminaire	Lamp post fixture equipped with: - Lighting post art 6100xx0009 - Light fixture art. 6106xx0009 - Waterproof junction box Other accessories should be ordered separately.

General information

Materials	Powder painted aluminum cast. Lens - transparent plastic PMMA. Silicone gasket. Nylon6 cable gland.
Mounting method	Luminaire mounting: 3 ø9mm holes with ø65mm diameter every 120°
Terminal	Hermetic box IP68: Connection terminals: max 4x4mm², Possibility of connecting the luminaire in a max 4x2,5mm² loop. A round wire in the isolation with a diameter of ø8 ... 12mm or ø10 ... 14mm
Type of light source	LED module AC integrated Replaceable (LED only) light source by a professional.
Light control	Phase-dimming (TRIAC) TRAILING EDGE (TE) - LEADING EDGE (LE)
Luminaire weight net / gross	13kg / 14,01kg
Box dimensions [cm]	15cm x 15cm x 260cm
Side area of luminaire	0,33m²

Technical data

LED module	Lumens DLM 90C 10W xxx 230V /A V0.1 (Datasheet)
External control	Phase dimmer Lumens LED AC (User manual)
Light source wattage	10W
Luminaire wattage	10W
Lamp luminous flux	1100lm
Luminaire luminous flux	959lm
Efficiency of the luminaire	95,9lm/W
ULOR	1%
Color temperature	3000K
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	80
LED photobiological threat	RG0 or RG1
Power Factor luminaire	PF >0,97
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C
Inrush current	150mA / 500µs
BUG rating	B1-U1-G0

Accessories sold separately

6133GA0009	Mounting adapter
6130XX0009	Concreting anchor
6132GA0009	Mounting adapter

Spare parts

46999402	LED module.

Files to download

Manual

Indexes

Index	Color	RAL
6117AL	ALUMINUM	9006
6117GR	GRAPHITE	7016

Other colors according to the "Colors Template" pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

Management System ISO 9001:2015 IATF 16949:2016
TÜVRheinland CERTIFIED
www.tuv.com ID 9108651873
PCC Cert CERTIFICATE ISO 14001
RoHS 2011/65/UE

Please read the manual before installing it. Due to the dynamic development of lighting technology, additional information is available upon request. LED modules must be replaced by a qualified person in accordance with applicable regulations. Condensation, which can occur in luminaires, is a natural phenomenon and does not impair the quality of the luminaire.