


NORLYS HAMMERFEST 6140

Hammerfest
6140XX0010
06.11.2026 v.10.37
www.norlys.no



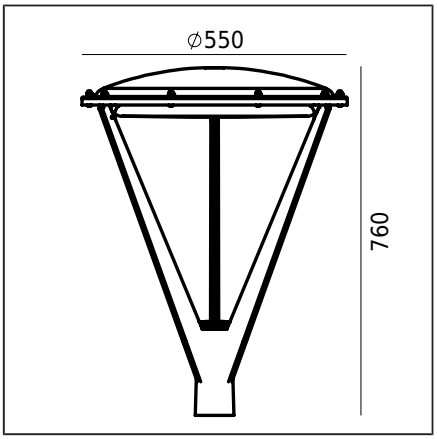

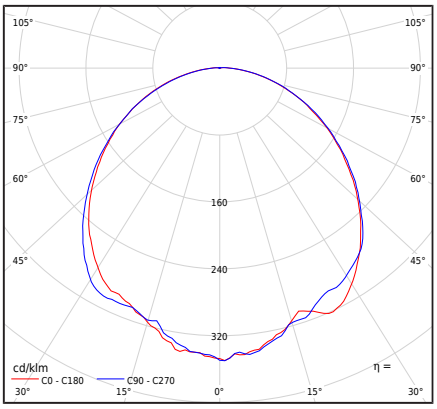

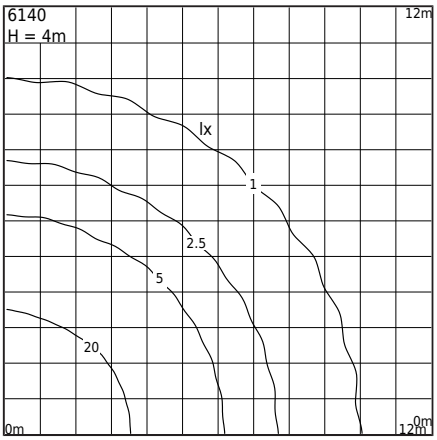

Type of luminaire

Type of luminaire	Pole luminaire.
Photometric body	Diffused light, covered from the top.
Characteristics of the luminaire	Pole luminaire, top-mounted with a ø60mm mounting shaft

General information

Materials	Powder painted aluminum cast. Lens - satin PMMA plastic. Silicone gasket.
Mounting method	Fixing of the luminaire: luminaire adjusted to ø60mm lighting pole, depth 95mm.
Terminal	H05RN-F 3G1 cable 6m long, for connection inside the lighting pole (in an appropriately selected electrical installation box).
Type of light source	LED module, electronic power supply Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.
Light control	Non-dimmable fixture
Luminaire weight net / gross	9,18kg / 11,75kg
Box dimensions [cm]	80cm x 62cm x 62cm
Side area of luminaire	0,1m^2

Technical data

LED module	Cree DK190707 V2 JK3030 3K (Datasheet)
Driver	Yes
Driver durability	100000h
Light source wattage	28,9W
Luminaire wattage	32,7W
Lamp luminous flux	4311lm
Luminaire luminous flux	3869lm
ULOR	1%
Color temperature	3000K
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	80
L80TM-21 [wg LM-80]	>102 000h
L90 TM-21 [wg LM-80]	>52 600h
LED photobiological threat	RG0 or RG1
Power Factor luminaire	PF > 0,98
THD factor	9%
Overvoltage	6 / 10kV
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C
This product contains light source of energy efficiency class C / EPREL	
Inrush current	19A / 210µs
BUG rating	"B1-U2-G1"

Accessories sold separately

154XX0010	Mounting adapter

Spare parts

0961400001	Electrical service kit.
4699101102	LED module.
4699200102	Power supply.

Files to download

Photometric LDT files	Photometric IES files
Manual	

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873

CERTIFICATE ISO 14001

RoHS 2011/65/UE

Please read the manual before installing. Due to the dynamic development of lighting technology, additional information is available upon request. LED module must be replaced by a qualified person in accordance with applicable regulations. Condensation, which can occur in luminaires, is a natural phenomenon and does not impair the quality of the luminaire.

HAMMERFEST 6140

Indexes

Index	Color	RAL
6140AL	ALUMINUM	9006
6140GR	GRAPHITE	7016

Other colors according to the "Colors Template" / RAL pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873
CERTIFICATE ISO 14001
RoHS 2011/65/UE

Please read the manual before installing. Due to the dynamic development of lighting technology, additional information is available upon request. LED module must be replaced by a qualified person in accordance with
applicable regulations. Condensation, which can occur in luminaires, is a natural phenomenon and does not
impair the quality of the luminaire.