

NORLYS HAMMERFEST 6141


IP 65 | IK 07 | LED | No Dim

Hammerfest
6141XX0011
02.11.2026 v.11.7
www.norlys.no



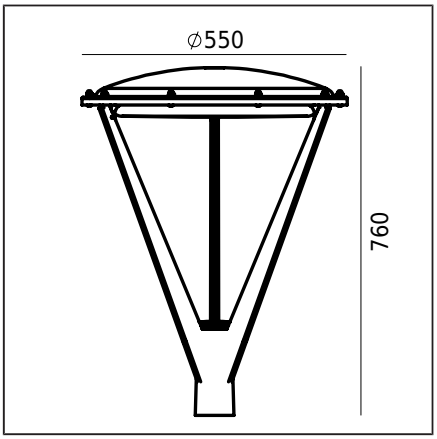

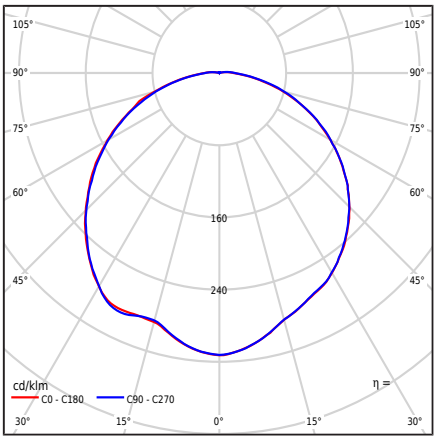

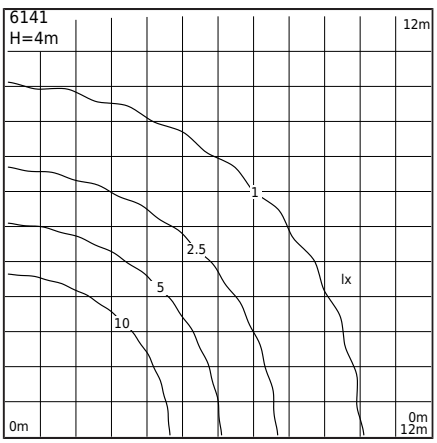

Type of luminaire

Type of luminaire	Pole luminaire.
Photometric body	Diffuse downward-directed hemispherical light
Characteristics of the luminaire	Surface-mounted luminaire designed to be installed on a lighting pole with a mounting post of Ø60mm.

General information

Materials	Powder painted aluminum cast. Lens - plastic PMMA in milky color. Silicone gasket.
Mounting method	Fixture mounting: the fixture is designed for a ø60mm pole, depth 95mm. Additional accessories must be purchased separately.
Terminal	H05RN-F 3G1 cable with a length of 6m for connection in a suitably selected electrical junction box.
Type of light source	LED module, electronic power supply Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.
Light control	Non-dimmable fixture
Luminaire weight net / gross	9,18kg / 11,75kg
Box dimensions [cm]	80cm x 62cm x 62cm
Side area of luminaire	0,102m^2

Technical data

LED module	Cree DK190707 V3 JB2835 3K (Datasheet)
Driver	Yes
Driver durability	100000h
Light source wattage	26,9W
Luminaire wattage	32W
Lamp luminous flux	5200lm
Luminaire luminous flux	3700lm
Efficiency of the luminaire	115,6lm/W
ULOR	2%
Color temperature	3000K
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	80
L80TM-21 [wg LM-80]	102 000h
L90 TM-21 [wg LM-80]	52 600h
THD factor	9%
Overvoltage	6 / 10kV
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C
This product contains light source of energy efficiency class C / EPREL	
Inrush current	19A / 210µs
BUG rating	"B1-U2-G1"

Accessories sold separately

154XX0010	Mounting adapter

Spare parts

ZS6141zx0011	Repair kit.

Files to download

Photometric LDT files	Photometric IES files
Manual	BIM Revit
BIM ArchiCAD	

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC Cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before starting installation, it is necessary to read the instructions included with the fixture. Due to the dynamic development of lighting technology, we provide additional information at the customer's request. Condensation that may occur in the fixtures is a natural phenomenon and does not affect the quality of the fixture.

HAMMERFEST 6141



Indexes

Index	Color	RAL
6141AL	ALUMINUM	9006
6141GR	GRAPHITE	7016

Other colors according to the "Colors Template" / RAL pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED
Management System
ISO 9001:2015
IATF 16949:2016
www.tuv.com
ID 9108651873

PCC cert
CERTIFICATE
ISO 14001

RoHS 2011/65/UE

Before starting installation, it is necessary to read the instructions included with the fixture. Due to the dynamic development of lighting technology, we provide additional information at the customer's request. Condensation that may occur in the fixtures is a natural phenomenon and does not affect the quality of the fixture.