


NORLYS HAMMERFEST 6147

Hammerfest
6147XX0009
16.09.2026 v.09.15
www.norlys.no



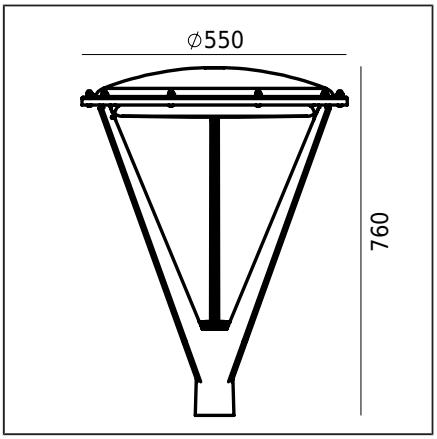

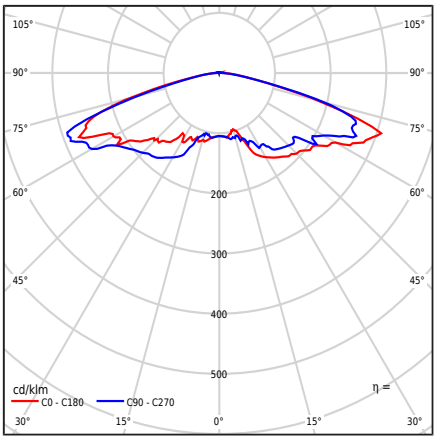

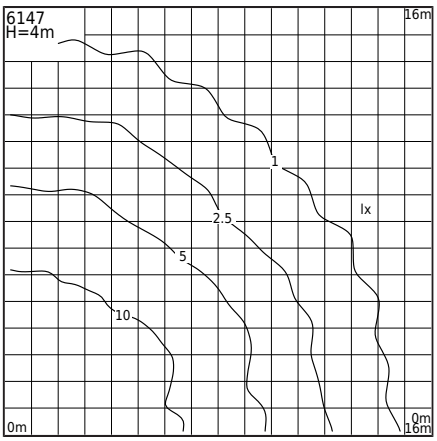

Type of luminaire

Type of luminaire	Pole luminaire.
Photometric body	Lens from Ledil type VSM (IESNA type V)
Characteristics of the luminaire	Surface mounted luminaire designed to be installed onto a lighting pole with a mounting stem of Ø60mm.

General information

Materials	Powder painted aluminum cast. Lens - transparent plastic PMMA. Silicone gasket.
Mounting method	Fixture mounting: fixture adapted to ø60mm pole, depth 95mm. Other accessories should be purchased separately.
Terminal	H05RN-F 3G1 cable with a length of 6m for connection in a pole, in an appropriately selected electrical installation box.
Type of light source	LED module, electronic power supply Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.
Light control	Light control in the D4i system. Power supply programmed for max permitted current. Programming of the remaining parameters after contact with the Norlys Sales Department.
Luminaire weight net / gross	4,92kg / 6,54kg
Box dimensions [cm]	22cm x 54,5cm x 54,5cm
Side area of luminaire	0,1m^2

Technical data

3 LED Modules	Philips Fortimo FastFlex LED 2x4 G4+ 3K (Datasheet)
Driver	Yes
External control	D4i (User manual)
Light source wattage	52W
Luminaire wattage	53W
Luminaire luminous flux	6545lm
Efficiency of the luminaire	123,5lm/W
ULOR	1%
Color temperature	3000K
Colour consistency (McAdam ellipse)	SDCM4
Colour rendering index CRI	70
L90B10 [wg LM-80]	>100 000h
THD factor	8%
Overvoltage	6 / 10kV
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C
This product contains light sources of energy efficiency class D / EPREL	
Inrush current	43A / 260µs

Accessories sold separately

154XX0010	Mounting adapter

Files to download

Photometric LDT files	Photometric IES files
Manual	

Indexes

Index	Color	RAL
6147AL	ALUMINUM	9006
6147GR	GRAPHITE	7016

Other colors according to the "Colors Template" pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED
Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873

PCC Cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before starting installation, it is necessary to read the instructions included with the fixture. Due to the dynamic development of lighting technology, we provide additional information at the customer's request. Condensation that may occur in the fixtures is a natural phenomenon and does not affect the quality of the fixture.