

NORLYS HAMMERFEST 6148


IP 65 | IK 07 | AC 220-240V 50-60Hz | LED | DALI2

Hammerfest
6148XX0009
14.10.2026 v.09.10
www.norlys.no



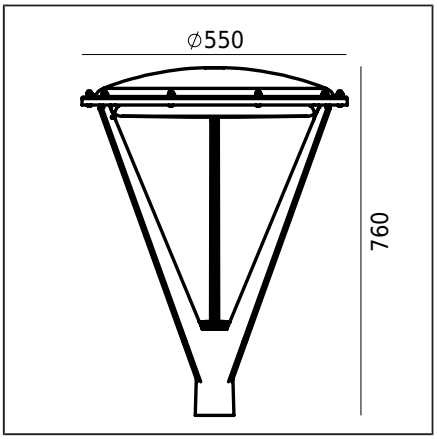

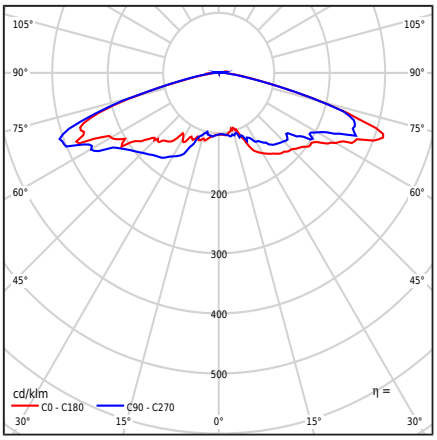

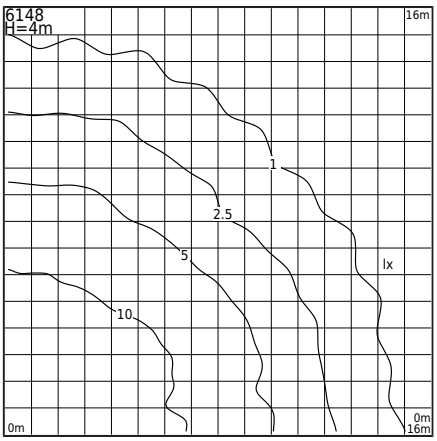

Type of luminaire

Type of luminaire	Pole luminaire.
Photometric body	Lens from Ledil type VSM (IESNA type V)
Characteristics of the luminaire	Mounted luminaire designed to be mounted on a lighting pole with a mounting shaft Ø60mm

General information

Materials	Powder painted aluminum cast. Lens - transparent plastic PMMA. Silicone gasket.
Mounting method	Mounting of the luminaire: luminaire adapted to a ø60mm pole, depth 95mm. Other accessories must be purchased separately.
Terminal	H05RN-F 5G1 cable, 6m long, for connection in a pole, in selected electrical installation box
Type of light source	LED module, DALI outdoor electronic power supply Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.
Light control	System light control: DALI outdoor full programm. The power supply is programmed for the maximum permitted current. Programming of other parameters after contact with the Norlys Sales Department.
Luminaire weight net / gross	4,92kg / 6,54kg
Box dimensions [cm]	80cm x 62cm x 62cm
Luminaire dimensions [cm]	76cm x 55cm x 55cm
Side area of luminaire	0,1m²

Technical data

3 LED Modules	Philips Fortimo FastFlex LED 2x4 G4+ 4K (Datasheet)
Driver	Yes
Driver durability	100000h
External control	DALI2 / NightDim (4DIM) (User manual)
Light source wattage	47W
Luminaire wattage	53W
Luminaire luminous flux	6802lm
Efficiency of the luminaire	128,3lm/W
ULOR	1%
Color temperature	4000K
Colour consistency (McAdam ellipse)	SDCM4
Colour rendering index CRI	70
L90B10 [wg LM-80]	>100 000h
THD factor	8%
Overvoltage	6 / 10kV
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C
This product contains light sources of energy efficiency class D / EPREL	
Inrush current	43A / 260µs
BUG rating	B3-U2-G1

Accessories sold separately

154XX0010	Mounting adapter

Spare parts

ZS6148zx0009	Repair kit.

Files to download

Photometric LDT files	Photometric IES files
Manual	BIM Revit
BIM ArchiCAD	

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before the installation, please read the instructions included with the luminaire. Due to the dynamic development of lighting technology, we provide additional information upon customer request. Condensation that may occur in luminaires is a natural phenomenon and does not affect the quality of the luminaire.

HAMMERFEST 6148

Indexes

Index	Color	RAL
6148AL	ALUMINUM	9006
6148GR	GRAPHITE	7016

Other colors according to the "Colors Template" / RAL pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873
CERTIFICATE ISO 14001
RoHS 2011/65/UE

Before the installation, please read the instructions included with the luminaire. Due to the dynamic development of lighting technology, we provide additional information upon customer request. Condensation that may occur in luminaires is a natural phenomenon and does not affect the quality of the luminaire.