
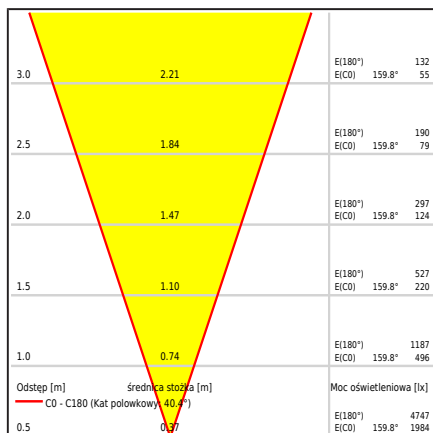
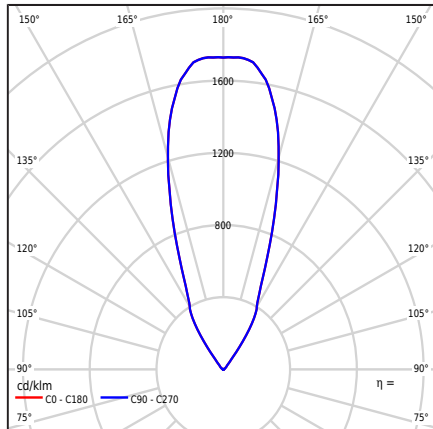


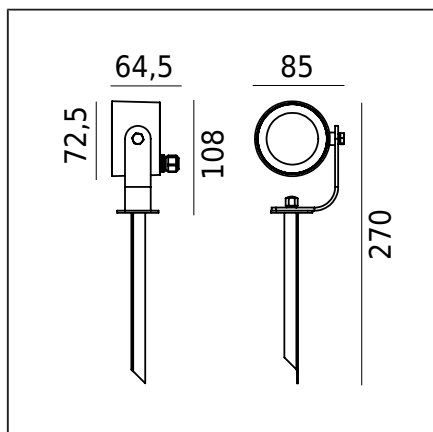

Type of luminaire

Type of luminaire	Portable, in-ground mounting reflector luminaire.
Photometric body	Symmetric light with 36D beam angle.
Characteristics of the luminaire	For lighting gardens, private areas, and other architectural concepts, The light direction can also be adjusted vertically

General information

Materials	Powder painted aluminum cast. Lampshade - safety glass, transparent.
Mounting method	The luminaire is equipped with an spike (to be stick to the ground), Other accessories must be purchased separately
Terminal	The luminaire is equipped with a 3m long H05RN-F 3G1 cable, To be connected in a properly selected electric box
Type of light source	LED module AC integrated Replaceable (LED only) light source by a professional.
Light control	Phase-dimming (TRIAC) TRAILING EDGE (TE) - LEADING EDGE (LE)
Net / gross weight of luminaire	0,56kg / 0,64kg
Box dimensions [cm]	23cm x 12,5cm x 9cm

Technical data

External control	Phase dimmer Lumens LED AC (User manual)
Luminaire wattage	8,4W
Luminaire luminous flux	687lm
Efficiency of the luminaire	81,8lm/W
ULOR	100%
Color temperature	3000K
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	80
Rated life time L70/B50 at 25°C	>50 000h
LED photobiological threat	RG0 or RG1
Power Factor luminaire	PF>0,98
THD factor	<20%
Ta Rated temperature	+25°C
Ambient temperature	TA MAX=+65°C

This product contains light source of energy efficiency class **E** / **EPREL**

Optionally, the fixture is also available:

- with LED color temperature of 2700K [1/1]
- with beam angles of 15D and 24D
- in a different fixture color (according to the RAL color chart)

Conditions of sale and additional information are available upon agreement with the Norlys Sales Department.

Inrush current	35mA / 60ms
BUG rating	B1-U0-G0

Accessories

sold separately

145ZX0009	Connection box
-----------	----------------

Files to download

Photometric LDT files	Photometric IES files
Manual	Instructions for replacing the light source and control devices

Indexes

Index	Color	RAL
6167BL	BLACK	9005