

NORLYS BERLIN 617


AC 220-240V 50-60Hz | IP 54 | IK 10 | LED | DIM

Berlin 617XX0014
14.10.2026 v.14.3
www.norlys.no



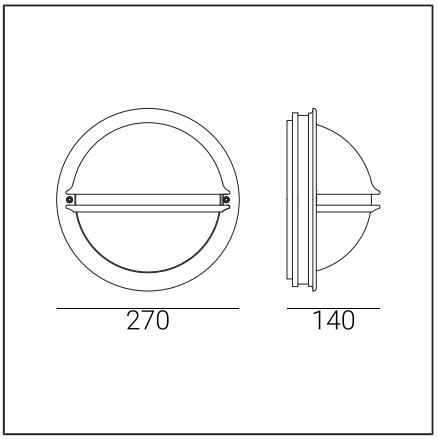

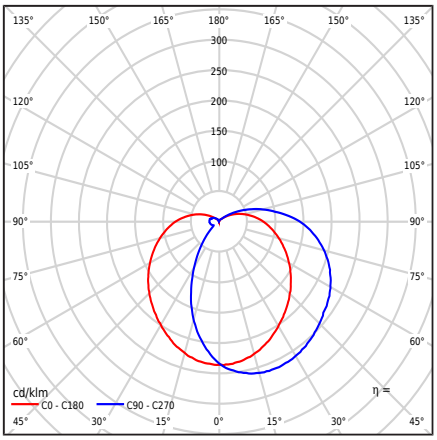

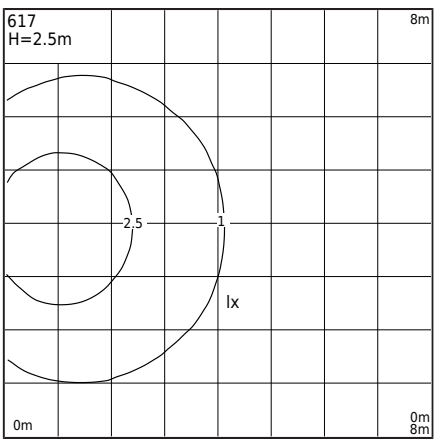

Type of luminaire

Type of luminaire	Wall light,
Photometric body	Diffuse downward-directed hemispherical light
Characteristics of the luminaire	A ceiling light fixture with contemporary design for general use.

General information

Materials	Powder painted aluminum cast. Lens - milky polycarbonate, UV stabilized. Silicone gasket. EPDM cable gland.
Mounting method	Lamp mounting: 2 holes ø4.2mm, spacing 155x40mm.
Terminal	Terminal blocks: max 3x2.5mm², possibility to connect the fixture in a loop max 3x1.5mm². Cable in a round sheath with a diameter of ø7...10.5mm.
Type of light source	LED module AC integrated Replaceable (LED only) light source by a professional.
Light control	Phase-dimming (TRIAC) TRAILING EDGE (TE) - LEADING EDGE (LE)
Luminaire weight net / gross	2kg / 2,03kg
Box dimensions [cm]	27,5cm x 27,5cm x 15cm
Luminaire dimensions [cm]	27cm x 27cm x 14cm

Technical data

LED module	Lumens EDC 38C 8W xxx 230V A101 3K (Datasheet)
External control	Phase dimmer Lumens LED AC (User manual)
Light source wattage	8W
Luminaire wattage	8W
Lamp luminous flux	880lm
Luminaire luminous flux	185lm
Efficiency of the luminaire	23,1lm/W
ULOR	9%
Color temperature	3000K
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	80
L70TM-21 [wg LM-80]	>59 000h
Power Factor luminaire	PF 0,90
THD factor	20%
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C
This product contains light source of energy efficiency class E / EPREL	
Inrush current	35mA / 60ms
BUG rating	B0-U2-G0

Spare parts

ZS617zx0014	Repair kit.

Files to download

Photometric LDT files	Photometric IES files
Manual	

Indexes

Index	Color	RAL
617BL	BLACK	9005
617WH	WHITE	9003

Other colors according to the "Colors Template" / RAL pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before starting the assembly, you should familiarize yourself with the instructions attached to the fixture. Due to the dynamic development of lighting technology, additional information is provided at the customer's request. Condensation that may occur in fixtures is a natural phenomenon and does not affect the quality of the fixture.