
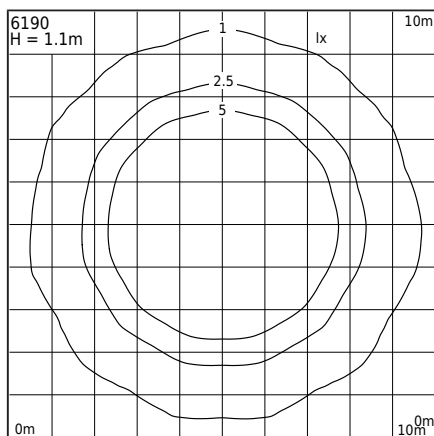
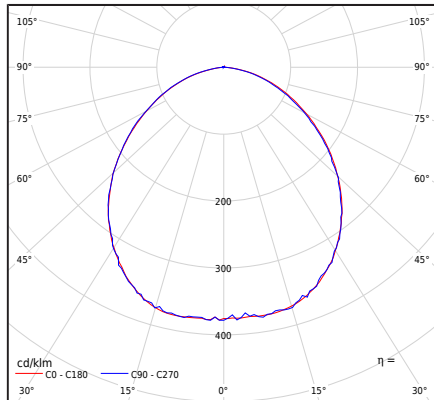


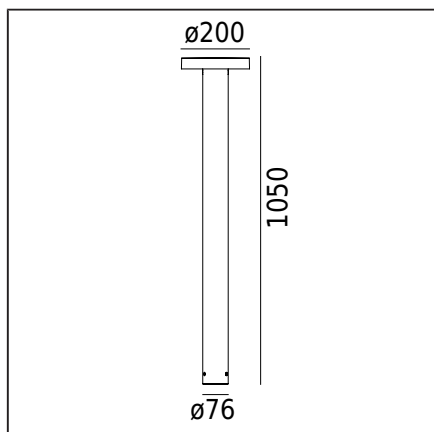

Type of luminaire

Type of luminaire	Post light fixture.
Photometric body	Light with rotationally symmetrical light distribution.
Characteristics of the luminaire	Luminaire with contemporary design. For lighting gardens and other private and public areas

General information

Materials	Powder painted aluminum cast. Lens - satin PMMA plastic. Silicone gasket.
Mounting method	Mounting of the luminaire in accordance with the attached assembly instructions Other accessories must be purchased separately
Terminal	Connection terminals: max 3x4mm ² Possibility to connect the luminaire in loops of max 3x4mm ² Round insulated cable with a diameter of ø8...12,5mm
Type of light source	LED module, electronic power supply Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.
Light control	Non-dimmable fixture

Technical data

Luminaire wattage	16W
Luminaire luminous flux	1358lm
Efficiency of the luminaire	84,9lm/W
ULOR	0%
Color temperature	3000K
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	80
Rated life time L70/B50 at 25°C	>72 000h
LED photobiological threat	RG0 or RG1
Power Factor luminaire	PF 0,9
THD factor	20%
Ta Rated temperature	+25°C
Ambient temperature	Ta max=+65°C

This product contains light source of energy efficiency class **E** / **EPREL**

Optionally, the luminaire is also available:

- In phase dimmable version
 - In the safety class for KL II
 - For the LED color 2700K [I/I]
 - For a different value of the luminous flux
 - Version with surge protection device (SPD)
 - For a different color of the fitting (according to the RAL color palette)
 - For a different height of the luminaire
- Terms of sale and other information, after contact with the Sales Department of Norlys

Inrush current	7,7A / 207μs
BUG rating	"B1-U1-G0"

Accessories sold separately

202GA0009	Concreting anchor
203ZX0009	Concreting anchor

Spare parts

ZS6190zx0009	Service set.
--------------	--------------

Files to download

Photometric LDT files	Photometric IES files
Manual	

Indexes

Index	Color	RAL
6190AL	ALUMINUM	9006
6190GR	GRAPHITE	7016