

NORLYS BREMEN 637


AC 220-240V 50-60Hz | IP 54 | IK 10 | LED | DIM

Bremen 637XX0014
14.10.2026 v.14.2
www.norlys.no



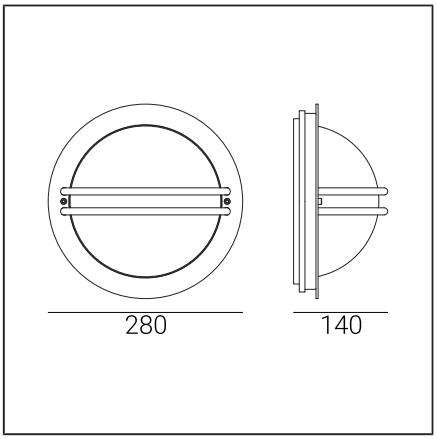

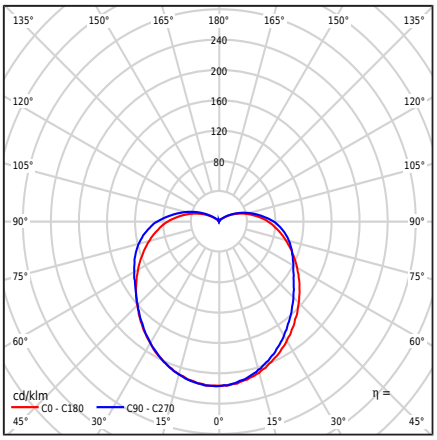

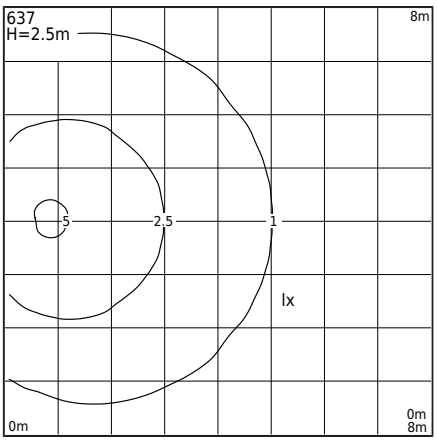

Type of luminaire

Type of luminaire	Wall light,
Photometric body	Diffused light.
Characteristics of the luminaire	Ceiling fixture with contemporary design for general use.

General information

Materials	Powder painted aluminum cast. Lens - milky polycarbonate, UV stabilized. Silicone gasket. EPDM cable gland.
Mounting method	Fixture mounting: 2 holes ø4.2mm, spacing 155x40mm.
Terminal	Connection terminals: max 3x2.5mm², possibility of looping the fixture max 3x1.5mm². Cord in a round sheath with a diameter ø7...10.5mm.
Type of light source	LED module AC integrated Replaceable (LED only) light source by a professional.
Light control	Phase-dimming (TRIAC) TRAILING EDGE (TE) - LEADING EDGE (LE)
Luminaire weight net / gross	1,83kg / 2,15kg
Box dimensions [cm]	27,5cm x 27,5cm x 15cm

Technical data

LED module	Lumens EDC 38C 8W xxx 230V A101 3K (Datasheet)
External control	Phase dimmer Lumens LED AC (User manual)
Light source wattage	8W
Luminaire wattage	8W
Lamp luminous flux	880lm
Luminaire luminous flux	364lm
Efficiency of the luminaire	45,5lm/W
ULOR	15%
Color temperature	3000K
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	80
L70TM-21 [wg LM-80]	>59 000h
Power Factor luminaire	PF 0,90
THD factor	20%
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C
This product contains light source of energy efficiency class E / EPREL	
Inrush current	35mA / 60ms
BUG rating	B0-U2-G1

Spare parts

ZS637zx0014	Repair kit.

Files to download

Photometric LDT files	Photometric IES files
Manual	

Indexes

Index	Color	RAL
637BL	BLACK	9005
637GA	HOT-DIP GALVANIZING	-

Other colors according to the "Colors Template" / RAL pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before starting the assembly, please read the instructions attached to the fixture. Due to the dynamic development of lighting technology, we provide additional information upon customer request. Condensation, which may occur in fixtures, is a natural phenomenon and does not affect the quality deterioration of the fixture.