


NORLYS BREMEN 638

Bremen 638XX0010
14.10.2026 v.10.2
www.norlys.no



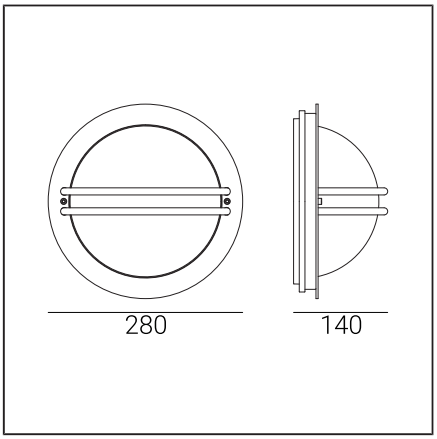

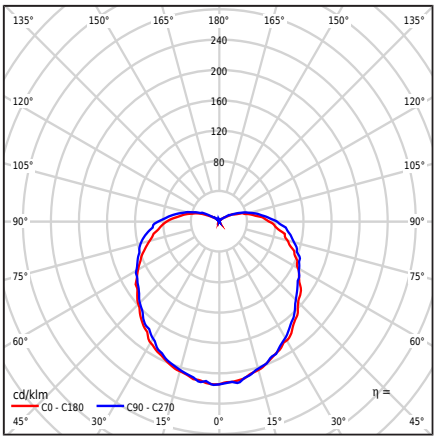

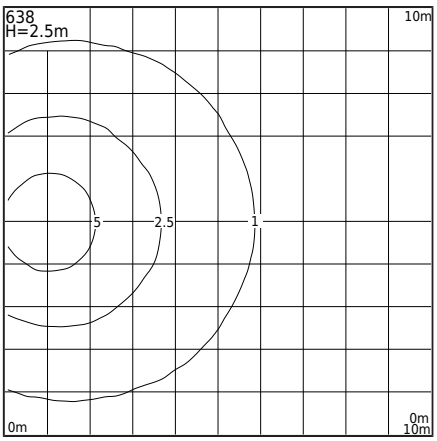

Type of luminaire

Type of luminaire	Wall light,
Photometric body	Diffused light.
Characteristics of the luminaire	A ceiling type fixture with contemporary design for general use. Equipped with a microwave motion sensor with a twilight switch and motion hold.

General information

Materials	Powder painted aluminum cast. Lens - milky polycarbonate, UV stabilized. Silicone gasket. EPDM cable gland.
Mounting method	Fixture mounting: 2 holes ø4.2mm, spacing 155x40mm.
Terminal	Connection terminals: max 3x2.5mm², option to connect the luminaire in a loop max 3x1.5mm². Round cable with a diameter of ø7...10.5mm.
Type of light source	LED module AC integrated Replaceable (LED only) light source by a professional.
Light control	The luminaire is equipped with a microwave motion sensor, with a twilight switch and motion support
Luminaire weight net / gross	1,75kg / 2,1kg
Box dimensions [cm]	27,5cm x 27,5cm x 15cm

Technical data

LED module	Philips Fortimo DLM ES 1100/8xx G2 3K (Datasheet)
External control	Microwave motion sensor HC005S (User manual)
Light source wattage	9,5W
Luminaire wattage	10W
Lamp luminous flux	1080lm
Luminaire luminous flux	532lm
Efficiency of the luminaire	53,2lm/W
ULOR	15%
Color temperature	3000K
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	80
L70TM-21 [wg LM-80]	>50 000h
LED photobiological threat	RG0 or RG1
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C
This product contains light source of energy efficiency class E / EPREL	
Inrush current	2,98A / 34,07µs
BUG rating	B0-U2-G1

Spare parts

06620003	Lampshade - service kit
ZS638zx0010	Repair kit.

Files to download

Photometric LDT files	Photometric IES files
Manual	

Indexes

Index	Color	RAL
638BL	BLACK	9005
638GA	HOT-DIP GALVANIZING	-

Other colors according to the "Colors Template" / RAL pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

Management System ISO 9001:2015 IATF 16949:2016
TÜVRheinland CERTIFIED
www.tuv.com ID 9108651873

PCC cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before starting the assembly, read the instructions attached to the fixture. Due to the dynamic development of lighting technology, we provide additional information upon customer's request. Condensation that may occur in fixtures is a natural phenomenon and does not affect the quality of the fixture.