
# NORLYS BASEL 665

AC 220-240V 50-60Hz | IP 54 | IK 07 | E27

Basel 665XX0009
16.09.2026 v.09.5
www.norlys.no



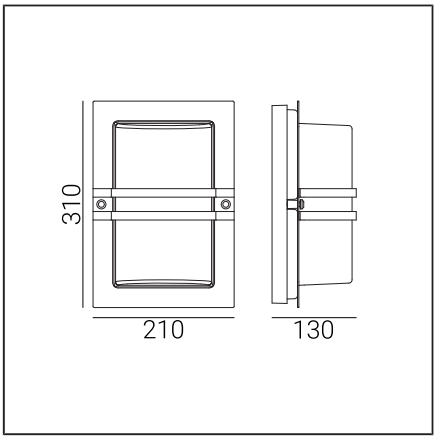


## Type of luminaire

| | |
|---|---|
| Type of luminaire | Wall light, |
| Photometric body | Diffused light. |
| Characteristics of the luminaire | Ceiling type luminaire with contemporary design equipped with a microwave motion sensor with a twilight switch and movement hold. |

## General information

| | |
|---|---|
| Materials | Base - powder painted aluminum cast. Front - stainless steel , hot dip galvanized steel, powder coated steel. Lens - safety glass, satin. Silicone gasket. |
| Mounting method | Fixture mounting: 2 holes ø4.5mm, spacing 138x50mm.<br>Motion sensor equipped with potentiometers for setting:<br>- operation time (from 5s to 30min.)<br>- operating range (up to 10m)<br>- light intensity (from 2...50lux)<br>The sensor is factory set to maximum values.<br>The principle of motion sensor operation is included in the instruction manual. |
| Terminal | Connection terminals: max 3x2.5mm², possibility of connecting the fixture in a loop max 3x1.5mm².<br>Round cable with a diameter of ø7...10.5mm. |
| Type of light source | E27 lamp, microwave motion sensor<br>Replaceable light source by an end-user. |
| Light control | Microwave motion sensor HC005S |
| Luminaire weight net / gross | 3,16kg / 3,99kg |
| Box dimensions [cm] | 27,5cm x 23cm x 33,5cm |
| Luminaire dimensions [cm] | 21cm x 13cm x 31cm |

## Technical data

| | |
|---|---|
| Lamp E27 | LED A55..60 |
| External control | Microwave motion sensor HC005S (User manual) |
| Light source wattage | LED max 9W |
| Luminaire wattage | LED max 9W |
| Ta Rated temperature | +25°C |
| Ambient operating temp. range | -20...+45°C |

Possibility to order the fixture along with the Philips Master LEDbulb 806lm/8.5W/2700K dimmable LED lamp.

## Spare parts

| | |
|---|---|
| 06660005 | Lampshade - service kit |
| 08652662 | Gasket. |
| 4699200003 | Motion sensor. |

## Files to download

Manual

## Indexes

| Index | Color | RAL |
|---|---|---|
| 665BL | BLACK | 9005 |
| 665GA | HOT-DIP GALVANIZING | - |
| 665ST | STAINLESS STEEL | - |

Other colors according to the "Colors Template" pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before starting the installation, please familiarize yourself with the instructions attached to the fixture. Due to the dynamic development of lighting technology, we provide additional information at the customer's request. Information on recommended light sources based on manufacturers' data. We do not take responsibility for the completeness and validity of the offer, therefore we refer to the current technical information of light source manufacturers. Condensation that may occur in fixtures is a natural phenomenon and does not affect the deterioration of the fixture quality.