

# NORLYS BASEL 668


IP 54 | IK 07 | AC 220-240V 50-60Hz | LED | DIM

Basel 668XX0013
16.09.2026 v.13.9
www.norlys.no

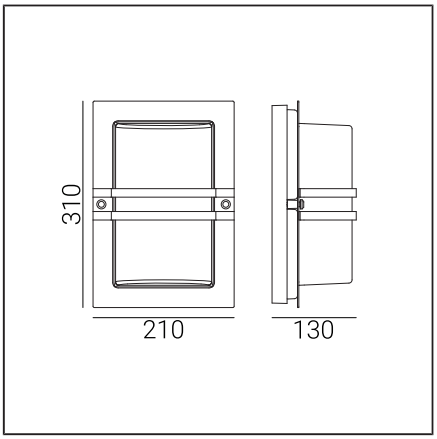

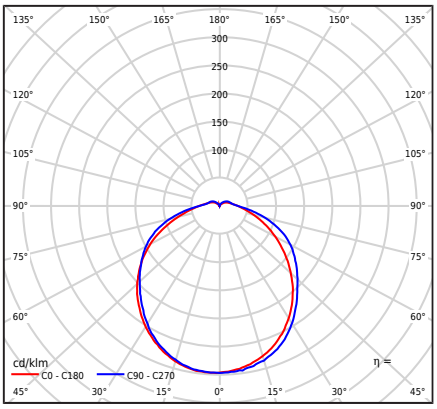


## Type of luminaire
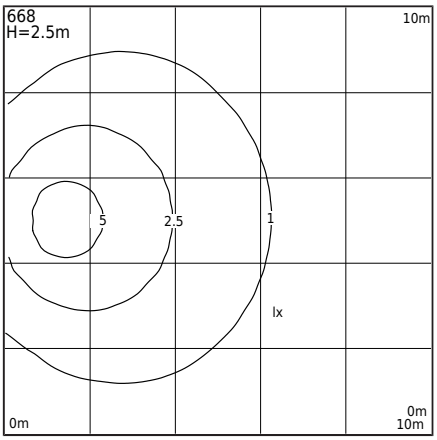
| | |
|---|---|
| Type of luminaire | Wall light, |
| Photometric body | Diffused light. |
| Characteristics of the luminaire | Modern design plafon type luminaire |

## General information

| | |
|---|---|
| Materials | Base - powder painted aluminum cast. Front - stainless steel , hot dip galvanized steel, powder coated steel. Lens - safety glass, satin. Silicone gasket. |
| Mounting method | Mounting of the luminaire: 2 holes ø4,5mm, spacing 138x50mm |
| Terminal | Connection terminals: max 3x2,5mm²,<br>Possibility to connect luminaire in loop max 3x1,5mm²,<br>Round isolation cable with a diameter of ø7...10,5mm |
| Type of light source | LED module, electronic power supply<br>Replaceable (LED only) light source by a professional.<br>Replaceable control gear by a professional. |
| Light control | Trailing edge (TE) dimming |
| Luminaire weight net / gross | 3,1kg / 3,8kg |
| Box dimensions [cm] | 27,5cm x 23cm x 33,5cm |

## Technical data

| | |
|---|---|
| LED module | Philips Fortimo_LED_Strip_0.5ft_MF_8xx_HV6 3K (Datasheet) |
| Driver | Yes |
| Driver durability | 50000h |
| Light source wattage | 3,9W |
| Luminaire wattage | 5,2W |
| Lamp luminous flux | 667lm |
| Luminaire luminous flux | 483lm |
| Efficiency of the luminaire | 92,9lm/W |
| ULOR | 10% |
| Color temperature | 3000K |
| Colour consistency (McAdam ellipse) | SDCM3 |
| Colour rendering index CRI | 80 |
| L80B20 [wg LM-80] | >72 000h |
| L90B10 [wg LM-80] | >64 000h |
| LED photobiological threat | RG0 or RG1 |
| Power Factor luminaire | PF > 0,9 |
| THD factor | ≤ 20 % |
| Ta Rated temperature | +25°C |
| Ambient operating temp. range | -20...+45°C |
| This product contains light source of energy efficiency class C / EPREL | |
| Inrush current | 1A/15,2µs |
| BUG rating | B0-U2-G1 |

## Spare parts

| | |
|---|---|
| ZS668zx0013 | LED module. |

## Files to download

| | |
|---|---|
| Photometric LDT files | Photometric IES files |
| Manual | |

## Indexes

| Index | Color | RAL |
|---|---|---|
| 668BL | BLACK | 9005 |
| 668GA | HOT-DIP GALVANIZING | - |
| 668ST | STAINLESS STEEL | - |

Other colors according to the "Colors Template" pattern book - available on request, subject to agreement with Norlys' Sales Department.


Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no


TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC Cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before the installation, read the instructions attached to the luminaire. Due to the dynamic development of lighting technology, we provide additional information at the client's request. LED module replaceable by a person with appropriate qualifications, following applicable regulations. Condensation, which may occur in luminaires, is a natural phenomenon and does not affect the quality of the luminaire