
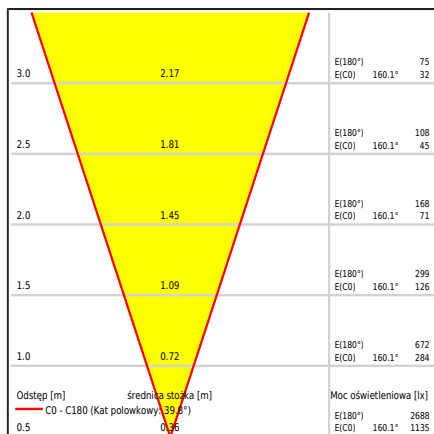
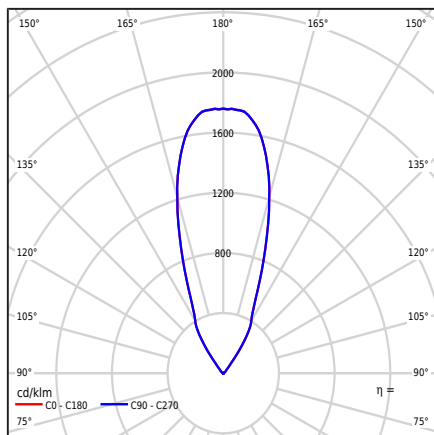
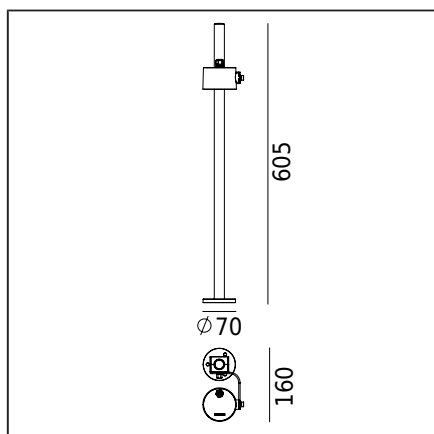


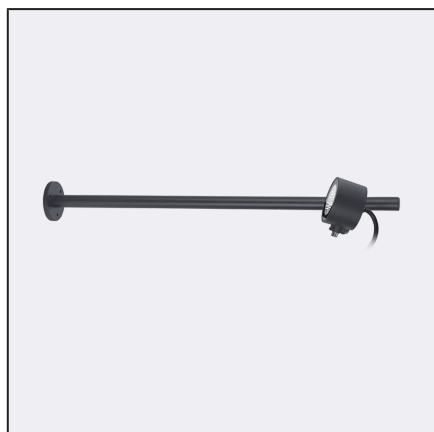

Type of luminaire

Type of luminaire	Reflector type luminaire.
Photometric body	Symmetric light with 36D beam angle.
Characteristics of the luminaire	For lighting gardens, private areas and other architectural concepts. Possibility to adjust the lighting direction also in the vertical plane.

General information

Materials	Powder painted aluminum cast. Lampshade - safety glass, transparent.
Mounting method	Luminaire mounting: 3 holes $\varnothing 6$ every 120°, diameter 50mm Kit: Art. 6700 - extension arm Art. 6705 - luminaire Other accessories must be purchased separately
Terminal	The luminaire is equipped with a cable type H05RN-F 3G1, 3m long To be connected in a properly selected electrical installation box
Type of light source	LED module AC integrated Replaceable (LED only) light source by a professional.
Light control	Phase-dimming (TRIAC) TRAILING EDGE (TE) - LEADING EDGE (LE)
Luminaire weight net / gross	1kg / 1kg

Technical data

LED module	Lumens EDC 38C 4W xxx 230V A101 3K (☞ Datasheet)
External control	Phase dimmer Lumens LED AC (User manual)
Light source wattage	4W
Luminaire wattage	4,2W
Lamp luminous flux	438lm
Luminaire luminous flux	382lm
Efficiency of the luminaire	91lm/W
ULOR	100%
Color temperature	3000K
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	80
L70TM-21 [wg LM-80]	59 000h
LED photobiological threat	RG0 or RG1
Power Factor luminaire	PF 0,98
THD factor	20%
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C

This product contains light source of energy efficiency class **E** / **EPREL**

Optionally, the luminaire is also available:

- For LED color 2700K [I/I]
 - For 15D and 24D beam angles
 - For a different color of the luminaire (according to the RAL color palette)
- Terms of sale and other information, after contact with the Norlys Sales Department

Inrush current	17mA / 60ms
BUG rating	B1-U0-G0

Accessories sold separately

6434XX0009 ☞	Clamp
6435XX0009 ☞	Clamp
6436XX0009 ☞	Clamp
6729XX0009 ☞	Mounting adapter
145ZX0009 ☞	Connection box

Files to download

Photometric LDT files	Photometric IES files
Manual	



Indexes

Index	Color	RAL
6706BL	BLACK	9005

Other colors according to the "Colors Template" pattern book - available on request, subject to agreement with Norlys' Sales Department.