

NORLYS BERN 676


IP 54 | IK 07 | AC 220-240V 50-60Hz | LED

Bern 676XX0009
14.10.2026 v.09.12
www.norlys.no



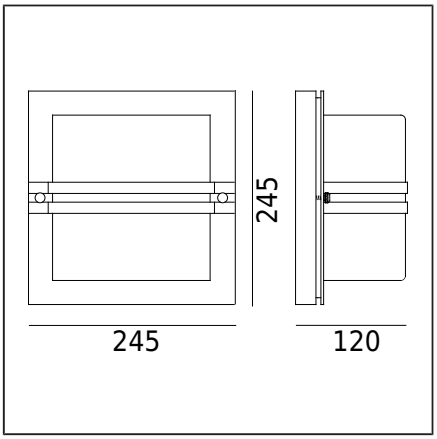

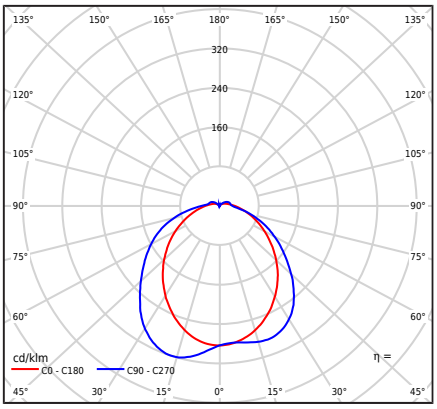

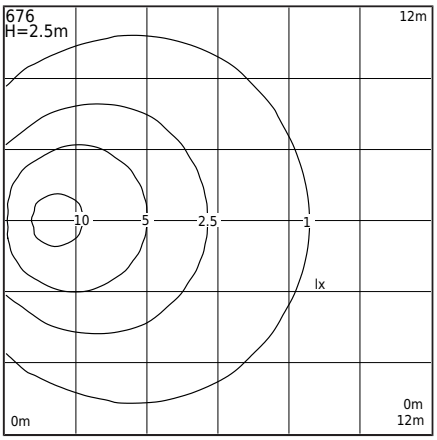

Type of luminaire

Type of luminaire	Wall light,
Photometric body	Diffused light.
Characteristics of the luminaire	A ceiling-type luminaire with a contemporary design

General information

Materials	Base - powder painted aluminum cast. Front - stainless steel , hot dip galvanized steel, powder coated steel. Lens - safety glass, satin. Silicone gasket.
Mounting method	Mounting of the luminaire : 2 holes ø4.5mm, spacing 170x50mm According to the attached assembly instructions
Terminal	Connection terminals: max 3x2,5mm² Possibility to connect the luminaire in loops, max 3x1,5mm² Round insulated cable with a diameter of ø7...10,5mm
Type of light source	Integrated AC LED module, microwave motion sensor Replaceable (LED only) light source by a professional.
Light control	The luminaire is equipped with a microwave motion sensor, with a twilight switch and motion support
Luminaire weight net / gross	1,51kg / 3,6kg
Box dimensions [cm]	28cm x 27cm x 29cm
Luminaire dimensions [cm]	24,5cm x 12cm x 24,5cm

Technical data

LED module	Philips Fortimo DLM ES 1100/8xx G2 4K (Datasheet)
External control	Microwave motion sensor HC005S (User manual)
Light source wattage	9,5W
Luminaire wattage	11,2W
Lamp luminous flux	1150lm
Luminaire luminous flux	878lm
Efficiency of the luminaire	78,4lm/W
ULOR	8%
Color temperature	4000K
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	80
L70TM-21 [wg LM-80]	>50 000h
Power Factor luminaire	PF 0,9
THD factor	30%
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C
This product contains light source of energy efficiency class D / EPREL	
Inrush current	2,98A / 34,07µs
BUG rating	B0-U2-G1

Spare parts

ZS676zx0009	Repair kit.

Files to download

Photometric LDT files	Photometric IES files
Manual	

Indexes

Index	Color	RAL
676BL	BLACK	9005
676GA	HOT-DIP GALVANIZING	-
676ST	STAINLESS STEEL	-

Other colors according to the "Colors Template" / RAL pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC Cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before the assembly, read the instructions attached to the luminaire. Installation and service work is carried out by a person with appropriate authorizations and qualifications, in accordance with applicable regulations. Due to the dynamic development of lighting technology, we provide additional information on request.
Condensation that may occur in the luminaires is a natural phenomenon and does not affect the quality of the luminaire