


NORLYS VARBERG 7151

Varberg 7151XX0009
24.11.2026 v.09.6
www.norlys.no



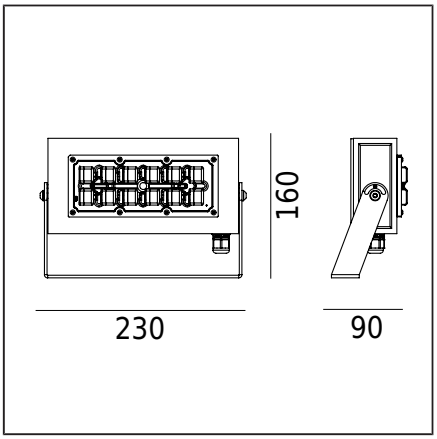

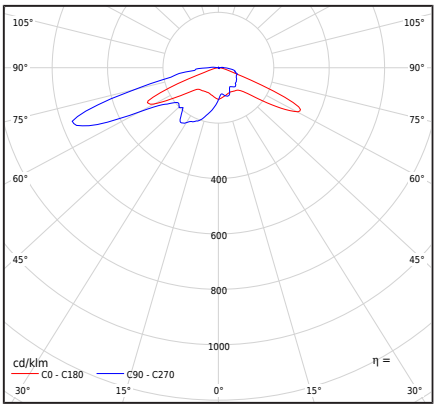

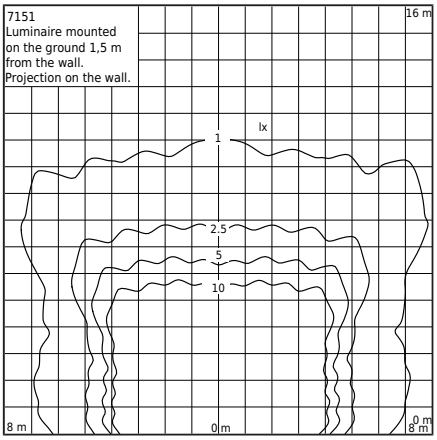

Type of luminaire

Type of luminaire	Floodlight luminaire
Photometric body	Lens from Ledil type T4-B (IESNA type IV)
Characteristics of the luminaire	For illuminating building facades, gardens, private areas, and other architectural concepts. Possibility of adjusting the lighting direction also in the vertical plane. The fixture is also adapted for direct current: DC 168 ÷ 275 V.

General information

Materials	Extruded aluminum profile, powder coated. Hermetic external lens - transparent PC plastic. Nickel-plated brass cable gland.
Mounting method	Fixture mounting: 2 holes 7 mm in diameter, 120 mm spacing. According to the included installation instructions.
Terminal	Fixture equipped with a H07RN-F 5G1 cable. For connection in an appropriately selected electrical installation box.
Type of light source	LED module, DALI outdoor electronic power supply Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.
Light control	System light control: DALI outdoor full programm. The power supply is programmed for the maximum permitted current. Programming of other parameters after contact with the Norlys Sales Department.
Luminaire weight net / gross	1,55kg / 1,6kg
Box dimensions [cm]	26,5cm x 17cm x 13cm
Luminaire dimensions [cm]	23cm x 16cm x 9cm

Technical data

LED module	Philips Fortimo FastFlex LED 2x6 DP G5 4K (Datasheet)
Driver	Yes
Driver durability	100000h
External control	DALI2 / NightDim (XI FP NLD) (User manual)
Light source wattage	26,9W
Luminaire wattage	30W
Luminaire luminous flux	3843lm
Efficiency of the luminaire	128,1lm/W
Color temperature	4000K
Colour consistency (McAdam ellipse)	SDCM5
Flicker of light (Pst LM)	≤0.1
Strobe effect (SVM)	≤0.1
Colour rendering index CRI	70
L90B10 [wg LM-80]	100 000h
LED photobiological threat	RG1
Power Factor luminaire	PF>0,98
THD factor	<7%
Overvoltage	6 / 10kV
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C

This product contains light source of energy efficiency class D / EPREL

Optionally, the fixture is also available:
- for LED color 5700K [1/1]
- in a different fixture color (according to the RAL color palette)
- with the possibility of installing a different type of lens.

Sales conditions and additional information are to be agreed with Norlys Sales Department.

Inrush current	18A / 280µs
BUG rating	B2-U2-G2

Accessories sold separately

104ZX0009	Ground spike

Files to download

Photometric LDT files	Photometric IES files
Manual	

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

Management System ISO 9001:2015 IATF 16949:2016
TÜVRheinland CERTIFIED
www.tuv.com ID 9108651873

PCC Cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before starting the installation, please read the instructions attached to the fixture. Due to the dynamic development of lighting technology, additional information is provided upon customer request. LED module replacement is only possible by a professional service from Norlys. Condensation that may occur in the fixtures is a natural phenomenon and does not affect the quality of the fixture.

VARBERG 7151

Indexes

Index	Color	RAL
7151AL	ALUMINUM	9006
7151BL	BLACK	9005
7151GR	GRAPHITE	7016

Other colors according to the "Colors Template" / RAL pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873
CERTIFICATE ISO 14001
RoHS 2011/65/UE

Before starting the installation, please read the instructions attached to the fixture. Due to the dynamic development of lighting technology, additional information is provided upon customer request. LED module replacement is only possible by a professional service from Norlys. Condensation that may occur in the fixtures is a natural phenomenon and does not affect the quality of the fixture.