

NORLYS VARBERG 7152


AC 220-240V 50-60Hz | IP 65 | IK 08 | LED | DIM

Varberg 7152XX0009
24.11.2026 v.09.13
www.norlys.no



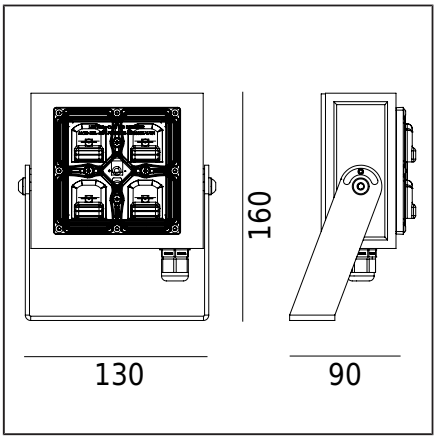

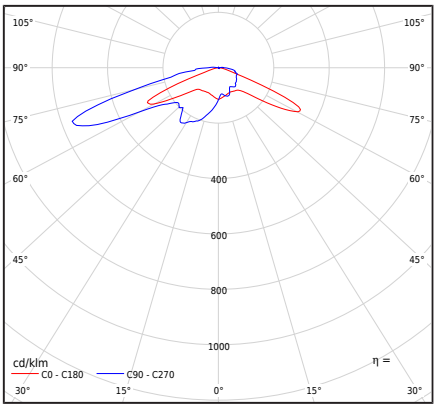

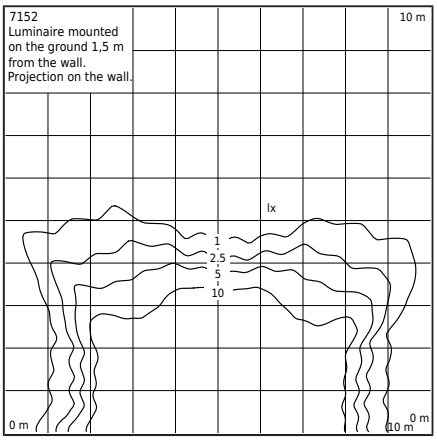

Type of luminaire

Type of luminaire	Floodlight luminaire
Photometric body	Lens from Ledil type T4-B (IESNA type IV)
Characteristics of the luminaire	For illuminating building facades, gardens, private areas, and other architectural concepts. Possibility to adjust the lighting direction also in the vertical plane.

General information

Materials	Extruded aluminum profile, powder coated. Hermetic external lens - transparent PC plastic. Nickel-plated brass cable gland.
Mounting method	Fixture mounting: 2 holes with a diameter of 7 mm spaced 90 mm apart. According to the enclosed installation instructions.
Terminal	The fixture is equipped with an H05RN-F 3G1 type cable. For connection in a suitably selected electrical installation box.
Type of light source	LED module, electronic power supply Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.
Light control	Trailing edge (TE) dimming
Luminaire weight net / gross	0,9kg / 1,03kg
Box dimensions [cm]	18,5cm x 17cm x 10cm
Luminaire dimensions [cm]	13cm x 16cm x 9cm

Technical data

LED module	Cree DK200402 V1 XTE-HE 3K (Datasheet)
Driver	Yes
Driver durability	50000h
Luminaire wattage	7,7W
Luminaire luminous flux	741lm
Efficiency of the luminaire	96,2lm/W
Color temperature	3000K
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	80
L90 TM-21 [wg LM-80]	109 000h
LED photobiological threat	RG1
Power Factor luminaire	PF>0,95
THD factor	<20%
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C

This product contains light source of energy efficiency class A G / EPREL

Optionally, the fixture is also available:
- in a different fixture color (according to the RAL color palette)
- with the possibility of installing a different type of lens.
Terms of sale and additional information upon agreement with the Sales Department of Norlys.

Inrush current	3,36A/36µs
BUG rating	B1-U1-G1

Accessories sold separately

104ZX0009	Ground spike

Files to download

Photometric LDT files	Photometric IES files
Manual	

Indexes

Index	Color	RAL
7152AL	ALUMINUM	9006
7152BL	BLACK	9005
7152GR	GRAPHITE	7016

Other colors according to the "Colors Template" / RAL pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC Cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before starting the installation, you should read the instructions attached to the luminaire. Due to the dynamic development of lighting technology, additional information is provided at the customer's request. Replacement of the LED module is possible only through the professional service of Norlys. Condensation that may occur in the luminaires is a natural phenomenon and does not affect the quality of the luminaire.