

NORLYS VARBERG 7154


AC 220-240V 50-60Hz | IP 65 | IK 08 | LED | DIM

Varberg 7154XX0009
24.11.2026 v.09.4
www.norlys.no



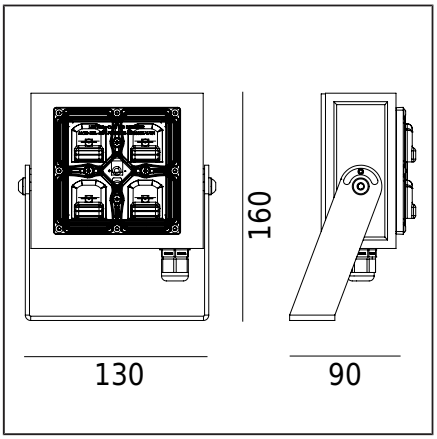

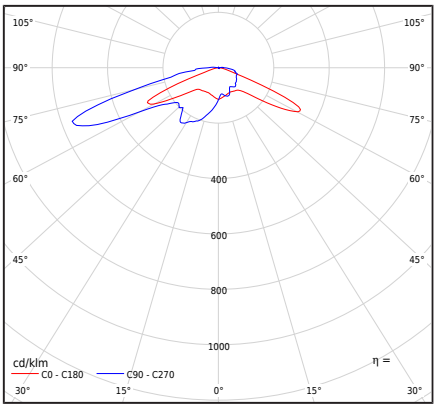

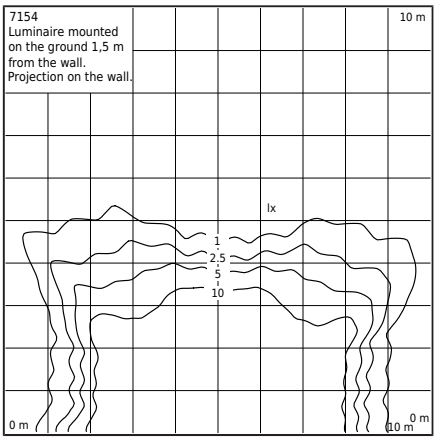

Type of luminaire

Type of luminaire	Floodlight luminaire
Photometric body	Lens from Ledil type T4-B (IESNA type IV)
Characteristics of the luminaire	For illuminating building facades, gardens, private areas, and other architectural concepts. Possibility to adjust the direction of lighting also in the vertical plane.

General information

Materials	Extruded aluminum profile, powder coated. Hermetic external lens - transparent PC plastic. Nickel-plated brass cable gland.
Mounting method	Fixture mounting: 2 holes, fi 7 mm, spacing 90 mm. According to the included installation instructions.
Terminal	The fixture is equipped with an H05RN-F 3G1 cable. To be connected in a suitably selected electrical junction box.
Type of light source	LED module, electronic power supply Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.
Light control	Trailing edge (TE) dimming
Luminaire weight net / gross	0,9kg / 1,03kg
Box dimensions [cm]	18,5cm x 17cm x 10cm
Luminaire dimensions [cm]	13cm x 16cm x 9cm

Technical data

LED module	Cree DK200402 V1 XTE-HE 3V 4K. (Datasheet)
Driver	Yes
Driver durability	50000h
Luminaire wattage	7,7W
Luminaire luminous flux	759lm
Efficiency of the luminaire	98,6lm/W
Color temperature	4000K
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	80
L90 TM-21 [wg LM-80]	109 000h
LED photobiological threat	RG1
Power Factor luminaire	PF>0,95
THD factor	<20%
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C

This product contains light source of energy efficiency class G / EPREL

Optionally, the fixture is also available:
- in another fixture color (according to the RAL color palette)
- with the possibility of mounting a different type of lens.
Sales conditions and additional information are available upon agreement with the Sales Department of Norlys.

Inrush current	3,36A/36µs
BUG rating	B1-U1-G1

Accessories sold separately

104ZX0009	Ground spike

Files to download

Photometric LDT files	Photometric IES files
Manual	

Indexes

Index	Color	RAL
7154AL	ALUMINUM	9006
7154BL	BLACK	9005
7154GR	GRAPHITE	7016

Other colors according to the "Colors Template" / RAL pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before starting the installation, please read the instructions attached to the fixture. Due to the dynamic development of lighting technology, additional information is provided upon the client's request. LED module replacement is only possible through Norlys' professional service. Condensation that may occur in the fixtures is a natural phenomenon and does not affect the quality of the fixture.