

NORLYS VARBERG 7155


AC 220-240V 50-60Hz | IP 65 | IK 08 | LED | DALI2

Varberg 7155XX0009
24.11.2026 v.09.7
www.norlys.no



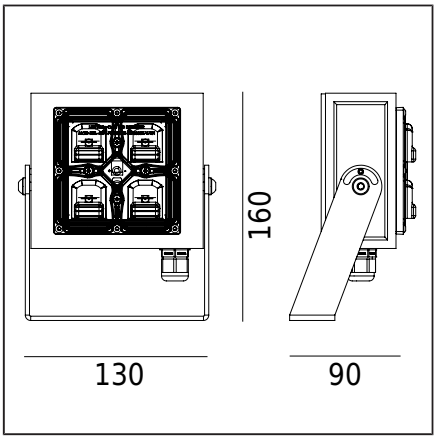

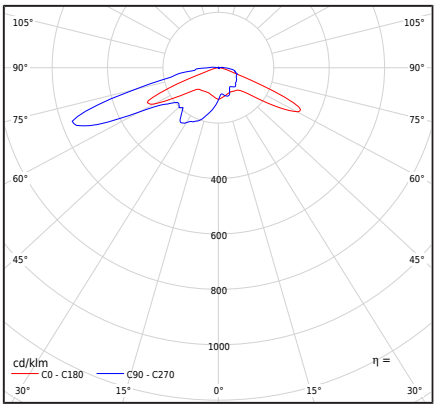

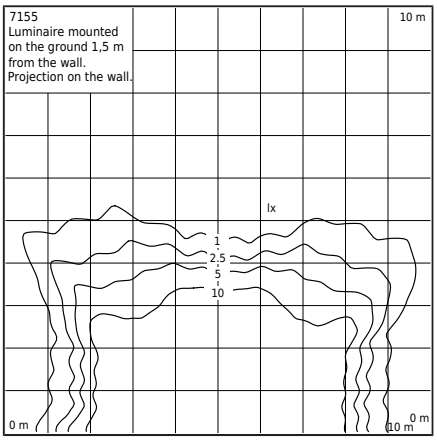

Type of luminaire

Type of luminaire	Floodlight luminaire
Photometric body	Lens from Ledil type T4-B (IESNA type IV)
Characteristics of the luminaire	For illuminating building facades, gardens, private areas, and other architectural concepts. Brightness direction can also be adjusted in the vertical plane.

General information

Materials	Extruded aluminum profile, powder coated. Hermetic external lens - transparent PC plastic. Nickel-plated brass cable gland.
Mounting method	Fixture mounting: 2 holes fi 7 mm spacing 90 mm According to the included installation instructions.
Terminal	The fixture is equipped with a H05RN-F 5G1 type cable. To be connected in a properly selected electrical installation box.
Type of light source	LED module, electronic power supply Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.
Light control	Light control - DALI system
Luminaire weight net / gross	0,9kg / 1,03kg
Box dimensions [cm]	18,5cm x 17cm x 10cm
Luminaire dimensions [cm]	13cm x 16cm x 9cm

Technical data

LED module	Cree DK200402 V1 XTE-HE 3V 4K. (Datasheet)
Driver	Yes
Driver durability	100000h
Luminaire wattage	7,8W
Luminaire luminous flux	760lm
Efficiency of the luminaire	97,4lm/W
Color temperature	4000K
Colour consistency (McAdam ellipse)	SDCM3
Flicker of light (Pst LM)	≤1
Strobe effect (SVM)	≤0.4
Colour rendering index CRI	80
L90 TM-21 [wg LM-80]	109 000h
LED photobiological threat	RG1
Power Factor luminaire	PF>0,95
THD factor	<10%
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C

This product contains light source of energy efficiency class A G / EPREL

Optionally the fixture is also available:
- for a different fixture color (according to the RAL color palette)
- option to mount a different type of lenses.
Terms of sale and additional information available upon agreement with the Norlys Sales Department.

Inrush current	5A / 220µs
BUG rating	B1-U1-G1

Maximum number of luminaires of this type per MCB:

B 10A: 82, B 16A: 130

Accessories sold separately

104ZX0009	Ground spike

Files to download

Photometric LDT files	Photometric IES files
Manual	

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC Cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before starting the installation, please read the instructions attached to the fixture. Due to the dynamic development of lighting technology, additional information is provided upon customer request. LED module replacement is only possible by the professional service of Norlys. Condensation that may occur in the fixtures is a natural phenomenon and does not affect the quality of the fixture.

NORLYS VARBERG 7155

Indexes

Index	Color	RAL
7155AL	ALUMINUM	9006
7155BL	BLACK	9005
7155GR	GRAPHITE	7016

Other colors according to the "Colors Template" / RAL pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873
CERTIFICATE ISO 14001
RoHS 2011/65/UE

Before starting the installation, please read the instructions attached to the fixture. Due to the dynamic development of lighting technology, additional information is provided upon customer request. LED module replacement is only possible by the professional service of Norlys. Condensation that may occur in the fixtures is a natural phenomenon and does not affect the quality of the fixture.